

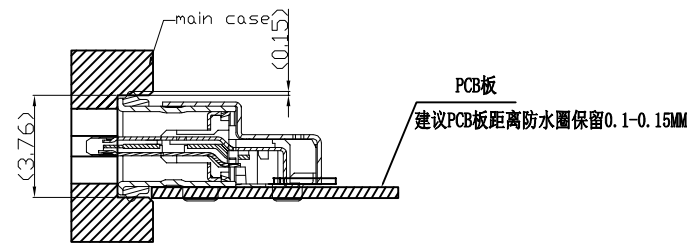
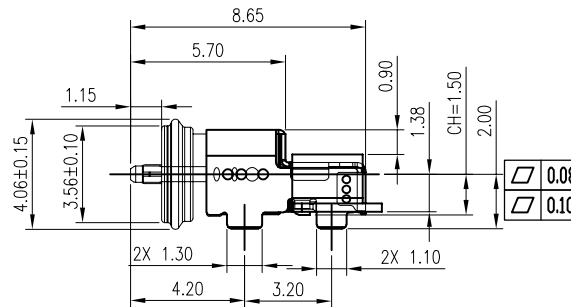


USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

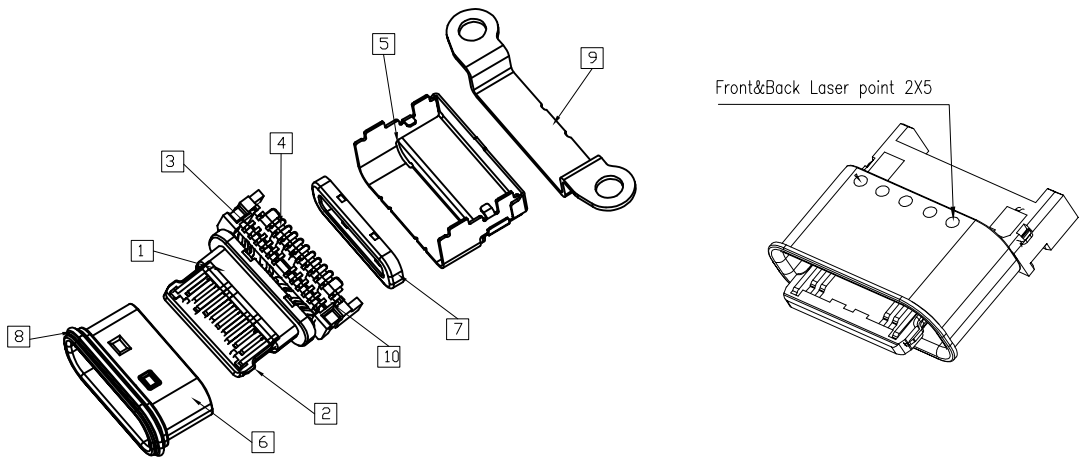


|       |     |      |    |       |        |      |   |
|-------|-----|------|----|-------|--------|------|---|
| SCALE | 1:1 | SIZE | A3 | SHEET | 1 OF 1 | REV. | A |
|-------|-----|------|----|-------|--------|------|---|

Frame\_A3  
Rev.F2013/09/10

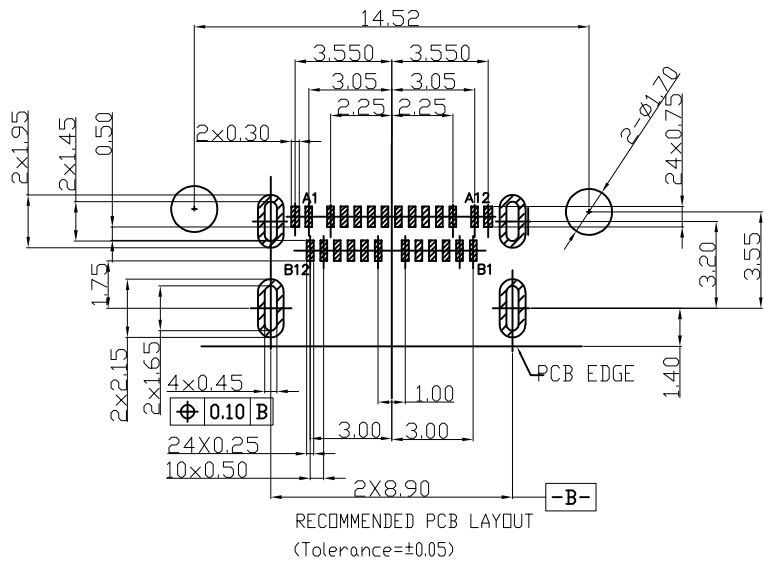

说明:

- 1. Colplanarity: 0.08最大红外线前., 0.10mm MAX
- 2. 舌PIN的位置:IR前 : 0.08mm MAX; IR 后0.12mm MAX;
- 3. P/N:
- 4. 包装方式 : 载带真空包装
- 5. 接触区和焊接区无毛刺, 除特说明, 冲压毛刺为0.05mm MAX.
- 6. 未标注尺寸公差为依自由公差为准.
- 7. 成品端子平面度必须100%检测.
- 8. 成品可靠性测试要求参照规格书.
- 9. 产品满足 ROHS 2.0

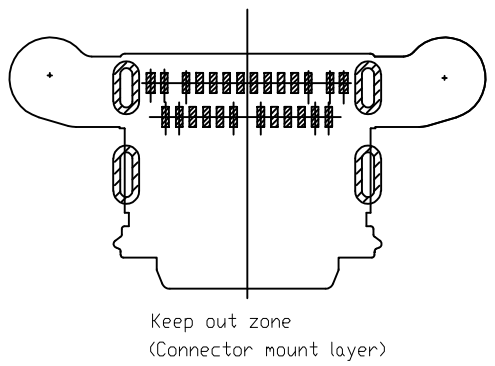

|     |                 |      |                                                   |        |
|-----|-----------------|------|---------------------------------------------------|--------|
| 10  | GULE            | g    | EPOXY GLUE, COLOR:BLACK                           |        |
| 9   | TOP_SHELL       | 1PCS | SUS304 ,T=0.30 NICKEL 50u" MIN.                   |        |
| 8   | RUBBER RING     | 1PCS | SILICA GEL, COLOR:BLACK                           |        |
| 7   | EMC             | 1PCS | SUS316 ,T=0.12. NICKEL 30u" MIN.                  |        |
| 6   | OUT_SHELL       | 1PCS | SUS304, T=0.20.                                   |        |
| 5   | INNER SHELL     | 1PCS | SUS316 ,T=0.20. CLEAN                             |        |
| 4   | TOP_TERMINAL    | 1SET | C18400, T=0.12. 50u" nickel plated, CONTACT AREA: |        |
| 3   | BOTTOM_TERMINAL | 1SET | PLATING Au 15u" , SOLDER AREA: G/F.               |        |
| 2   | MID PLATE       | 1PCS | SUS301, T=0.15mm, NICKEL 50u" MIN.                |        |
| 1   | MD HSG          | 1PCS | PA46 BLACK                                        |        |
| NO. | PART NAME       | QTY  | MATERIAL/FINISH                                   | REMARK |

| GENERAL TOLERANCES |      | UNIT  | mm |           |           |
|--------------------|------|-------|----|-----------|-----------|
| DISTANCE           | X.   | ±0.25 |    | SEE NOTES |           |
|                    | .X   | ±0.20 |    | SEE NOTES |           |
|                    | .XX  | ±0.15 |    | APPROCED  | KATE DENG |
|                    | .XXX | ±0.10 |    | CHECKED   | KATE DENG |
|                    |      |       |    | DESIGN    | FAND      |
| ANGLE              | X.   | ±3.0° |    | DRAWN     | Wang Yan  |
|                    | .X   | ±2.0° |    |           |           |
|                    | .XX  | ±1.0° |    |           |           |

|                                      |                              |
|--------------------------------------|------------------------------|
| 杰康富精密电子有限公司                          |                              |
| J K F precision Electronics Co., LTD |                              |
| TITLE:                               | TYPE C/F 24PIN 防水IP68板上双贴带马甲 |
| PART NO.                             | JK-US4024AGB0042R-2          |
| DRAWING NO.                          | 224-261                      |
| SCALE                                | 1:1                          |
| SIZE                                 | A3                           |
| SHEET                                | 1 OF 1                       |
| REV.                                 | A                            |

