

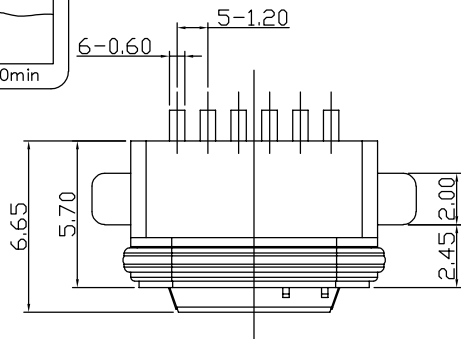




机壳与胶圈干涉建议单边0.15最小, 胶圈尺寸跑上限.








← 装配方向



组装示意图

开孔尺寸参考

组装外壳时需要打环保润滑油

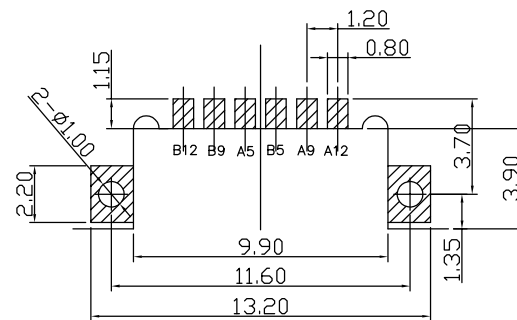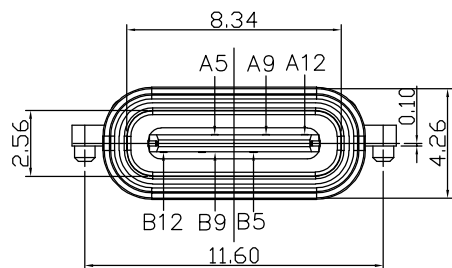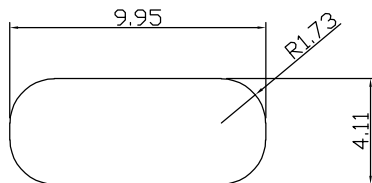

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

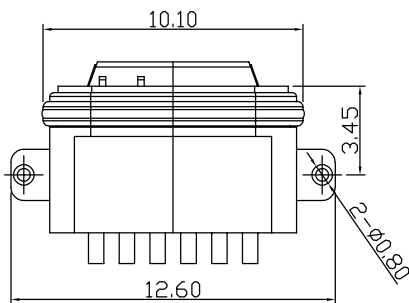

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	MID PALTE	1	SUS301	T=0.15mm
4	O RING	1	SILICON RUBBER	WHITE
3	Shell	1	Kirsite Ni 40-80u"	WHITE
2	Contact	6	Brass Ni 50U"; Au 1U"Plating	T=0.20mm
1	Housing	1	PA10T (G.F30%)	BLACK
ITEM	PART NAME	Q'TY	FINISH	NOTE

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.				
	.X	±0.25			
	.XX	±0.20			
	.XX	±0.15			
	.XXX	±0.10			
ANGLE	X.	±3.0°			
	.X	±2.0°			
	.XX	±1.0°			



杰康富精密电子有限公司
J K F precision Electronics Co., LTD

TITLE: USB TYPE C 6PIN(沉板1.60mm) IPX7

PART NO. JK-US3506AGB0153R

DRAWING NO. 0029IPX7

SCALE 1:1 SIZE A3 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------