
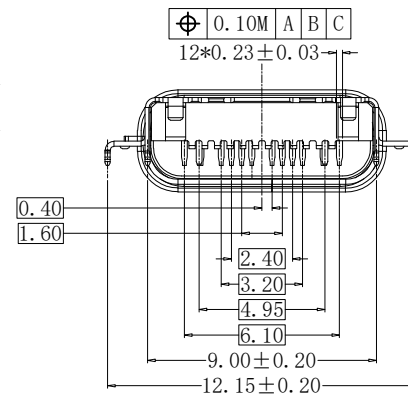
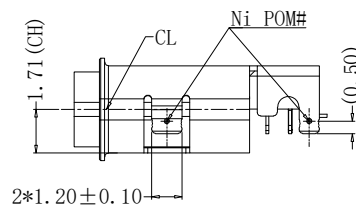
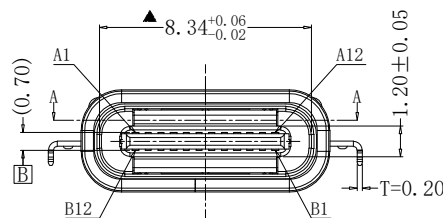

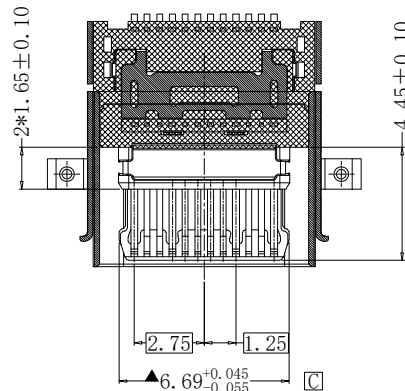
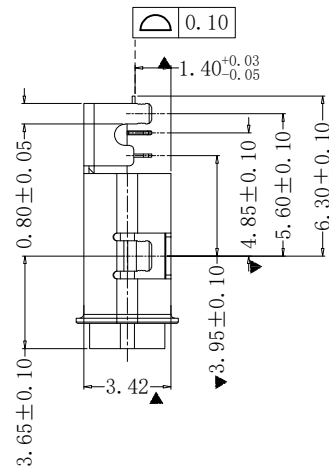


RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	原始图档	2023.05.09	

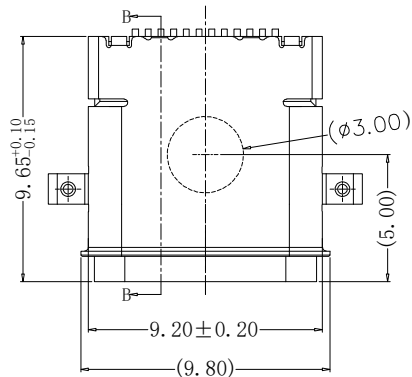

SPECIFICATION:

- CURRENT RATING: 5.0 A
- VOLTAGE RATING: 5.0 V
- VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
- INSULATION RESISTANCE: 100MΩ MIN
- DIELECTRIC WITHSTAND VOLTAGE
AC 100V FOR 1MINUTE
- INSERTION FORCE: 0.5~2.0kgf
- UNMATING FORCE: 0.8-2.0kgf
- DURABILITY: 10000 CYCLES
- OPERATING TEMPERATURE: -25°C~+85°C
- THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C
- WATERPOOF: IP67

1	OUT SHELL	STAINLESS STEEL	NI PLATED
2	MID PLATE	STAINLESS STEEL	SUS304 NO PLATED
3	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T BLACK UL 94 V-0
4	CONTACT	COPPER ALLOY(C7025)	Au PLATING ON CONTACT AREA
5	GND PLATE	STAINLESS STEEL	SUS304 NO PLATED
3	INNER SHELL	STAINLESS STEEL	NI PLATED
7	RING	SILICON	
NO.	PARTS	MATERIAL	REMARKS

RoHS
Compliant
2002/95/EC

MATERIAL NO.:

JK-US3224AGB0175R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0
	.X ±0.20	.X ±3.0
	.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
TYPE-C 24PIN 端子前插后贴沉板9.65L
防水型 IP67

ECN DESCRIPTION
RELEASE TO TOOLING

DRAWN BY DATE

KATE DENG

CHECKED BY DATE

FAND

APPROVED BY DATE

Wang Yan

DOCUMENT NO.

SHEET NO.

1 OF 1

DIMENSION STYLE

MM ONLY

DESIGN UNITS

METRIC

SCALE

10:1






THIRD ANGLE
PROJECTION


frame size: A4
Rev.A 2022.04.09



REV	ECN No.	DATE	REMARK
△	原始图档	2023.05.09	

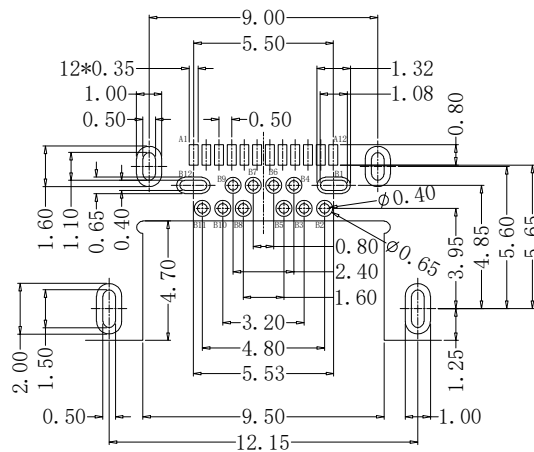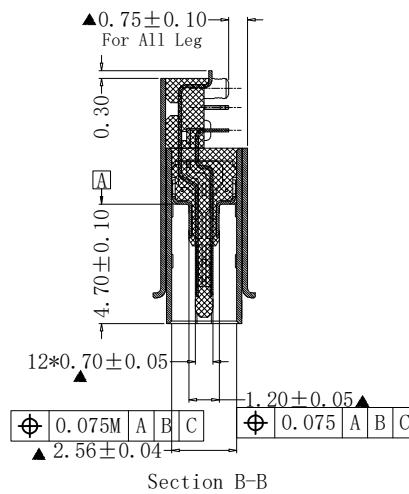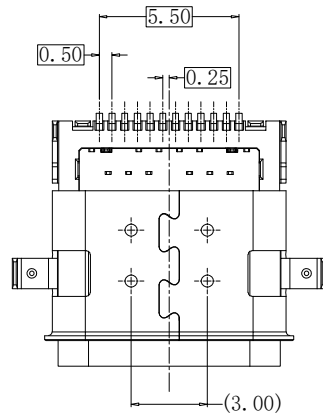

RECOMMENDED PCB LAYOUT, TOP VIEW
(THICKNESS=0.60MM; TOLERANCE:±0.05)

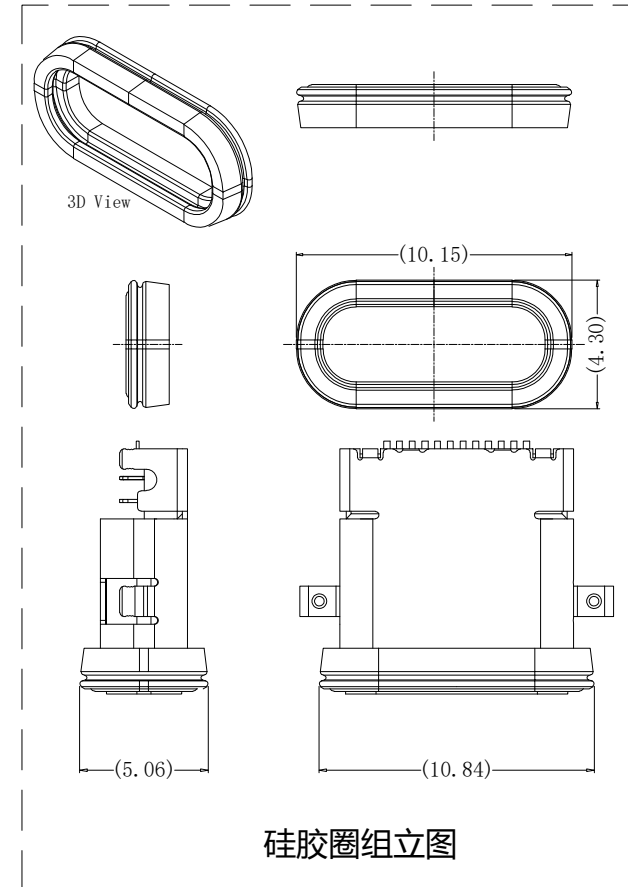




硅胶圈组立图

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US3224AGB0175R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		TYPE-C 24PIN 端子前插后贴沉板9.65L 防水型 IPX7		RELEASE TO TOOLING	
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE
	X.	±0.25	X.	±4.0	KATE DENG
	.X	±0.20	.X	±3.0	CHECKED BY
	.XX	±0.15	.XX	±2.0	FAND
DOCUMENT NO.			SHEET NO.		DATE
			1 OF 1		APPROVED BY
DIMENSION STYLE			DESIGN UNITS		DATE
MM ONLY			METRIC		Wang Yan
SCALE			THIRD ANGLE PROJECTION		
10:1					

frame size: A4
Rev.A 2022.04.09




REV	ECN No.	DATE	REMARK
△	原始图档	2023.05.09	

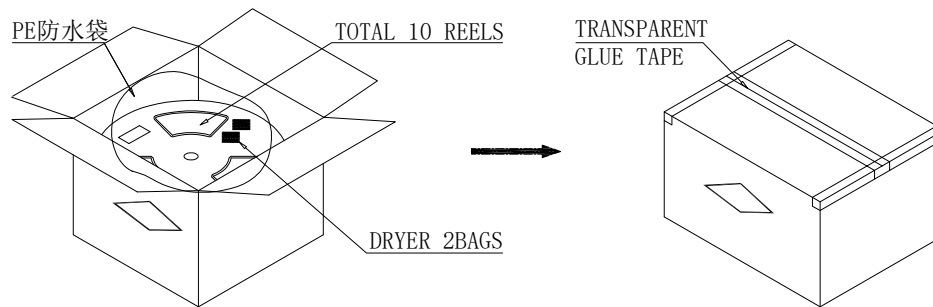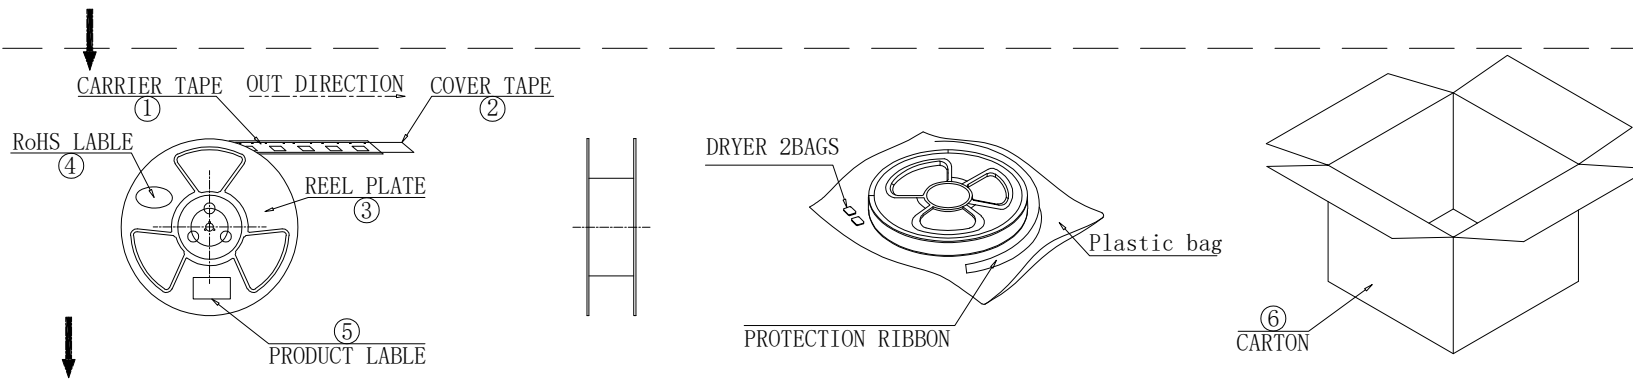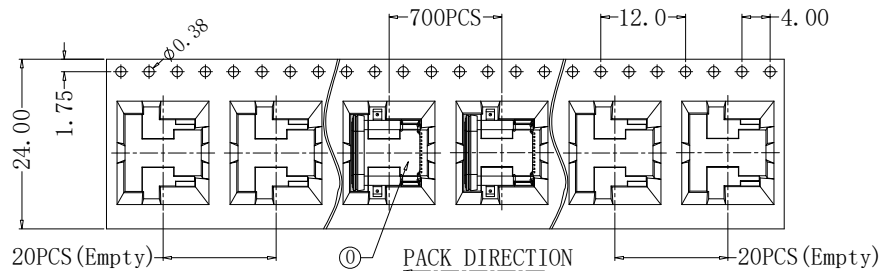

说明:

- 1.每卷前后各空20PCS,尾部用美纹胶纸封住;
- 2.将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上1Pcs物料标签;
- 3.每10卷盘一叠共7000Pcs并装入1个外箱内;
- 4.在搬运过程中要轻拿轻放;
- 5.在运输中不可堆放过多(1.8M最高),不可重压;
- 6.跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a.产品不可跑出下带凹槽;
b.产品不可有摔伤,变形;
c.内包装材料不可严重破损.

	REEL	CARTON
CONNECTOR (PCS)	700	7000

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
JK-US3224AGB0175R		TITLE				ECN DESCRIPTION			
REVIEW TABLE FOR DETAILS		TYPE-C 24PIN 端子前插后贴沉板9.65L 防水型 IPX7				RELEASE TO TOOLING			
QUALITY SYMBOL ▽ = 0 ◀ = 12 ▶	GENERAL TOLERANCES (UNLESS SPECIFIED)		 J K F Technology Co.,Ltd				DRAWN BY	DATE	
	X. ±0.25 X. ±4.0						KATE DENG		
	.X ±0.20 .X ±3.0		CHECKED BY	DATE					
	.XX ±0.15 .XX ±2.0		FAND	-----					
	DOCUMENT NO.				SHEET NO.	APPROVED BY	DATE		
					1 OF 1	Wang Yan	-----		
		DIMENSION STYLE		DESIGN UNITS		SCALE		 THIRD ANGLE PROJECTION	
		MM ONLY		METRIC		10:1			

frame size: A4
Rev.A 2022.04.09