

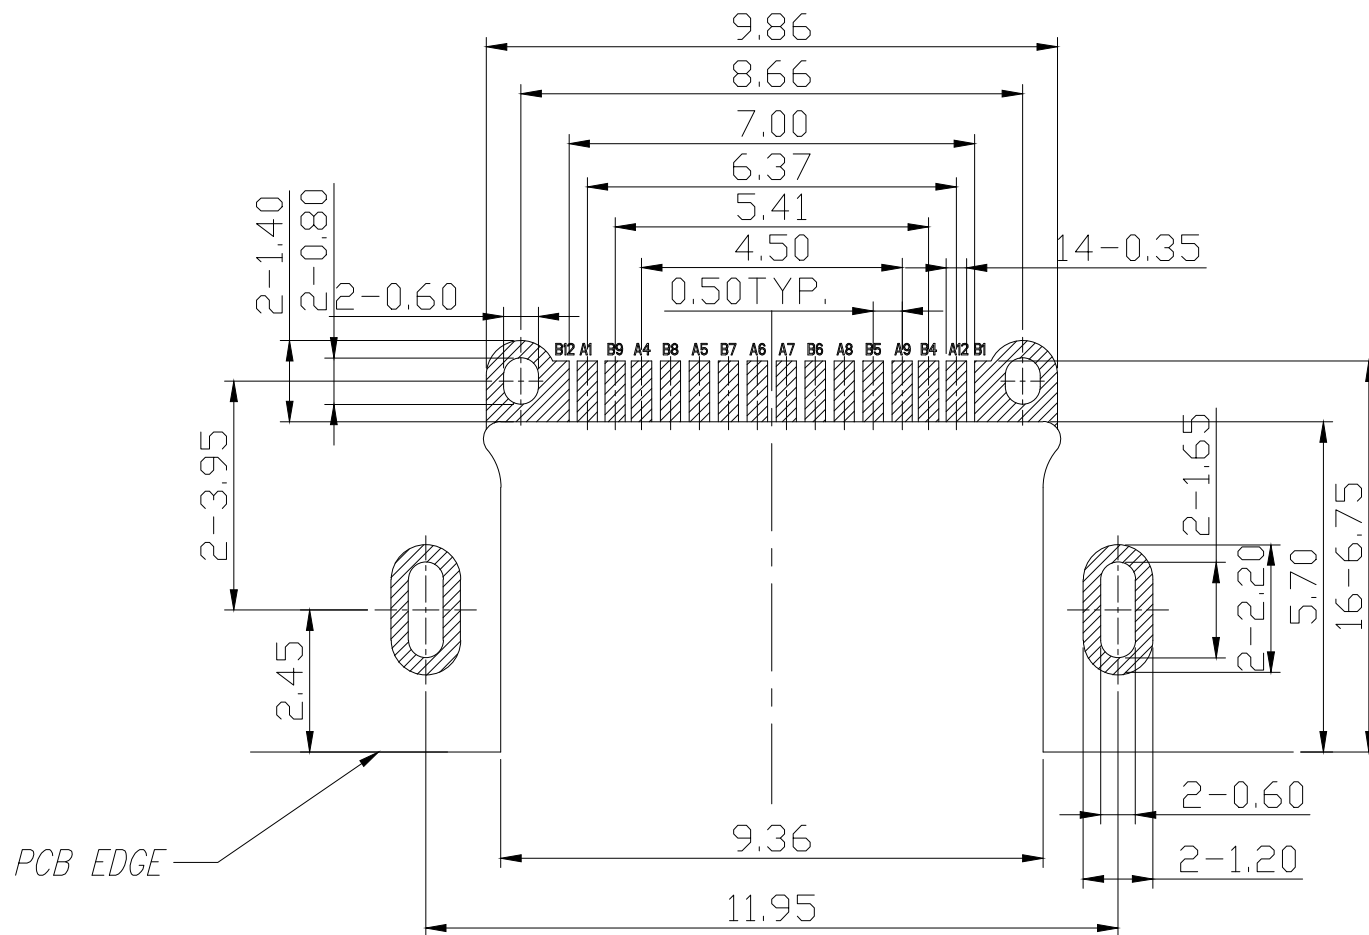
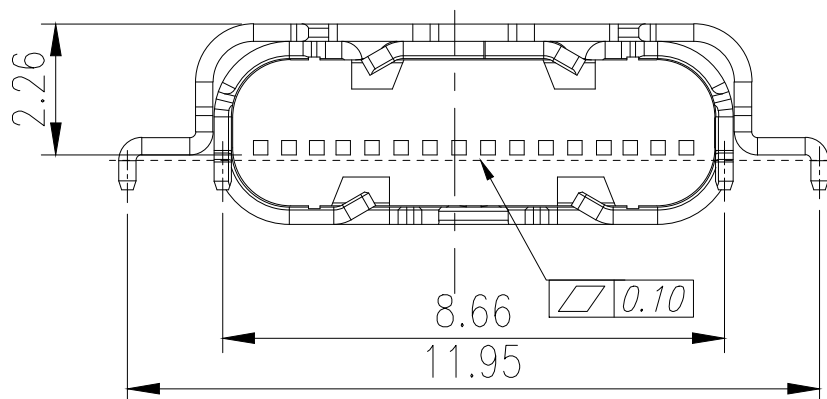
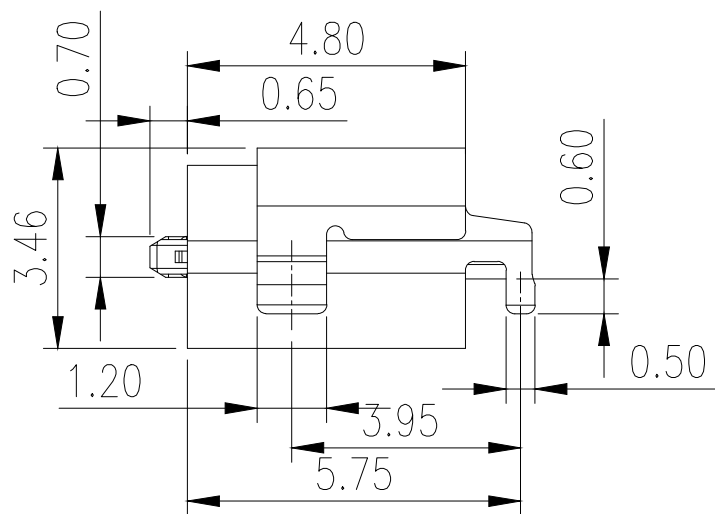
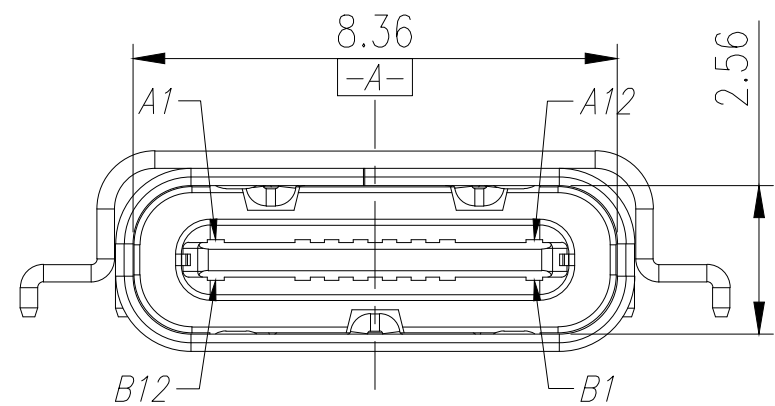


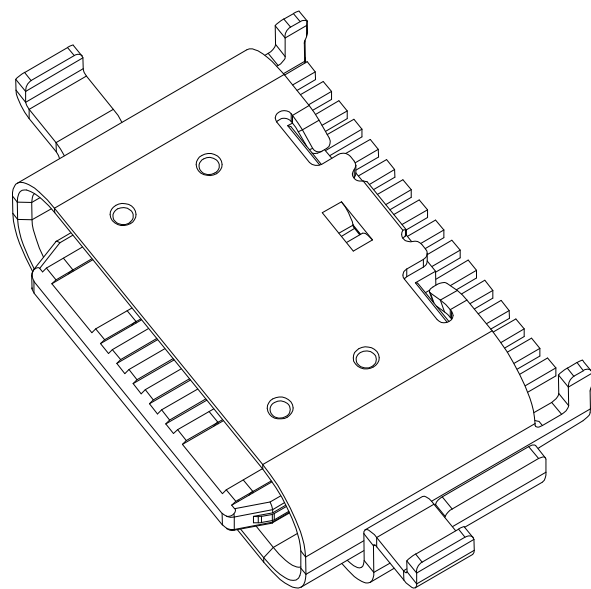

REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

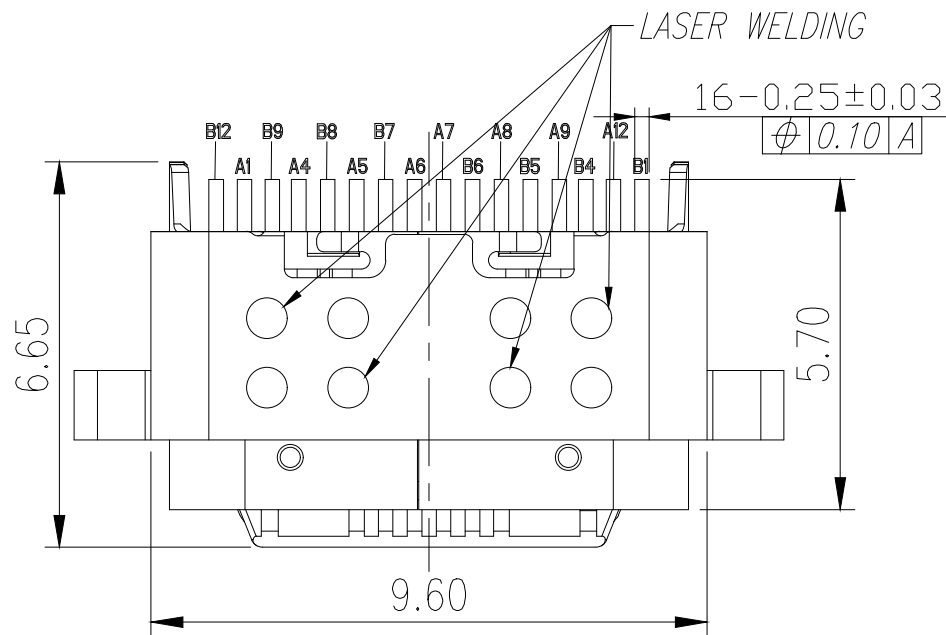

P.C.B LAYOUT VIEW TOLERANCE ± 0.05

SPECIFICATION:


1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5A
- 1.2 TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

- 3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CONNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

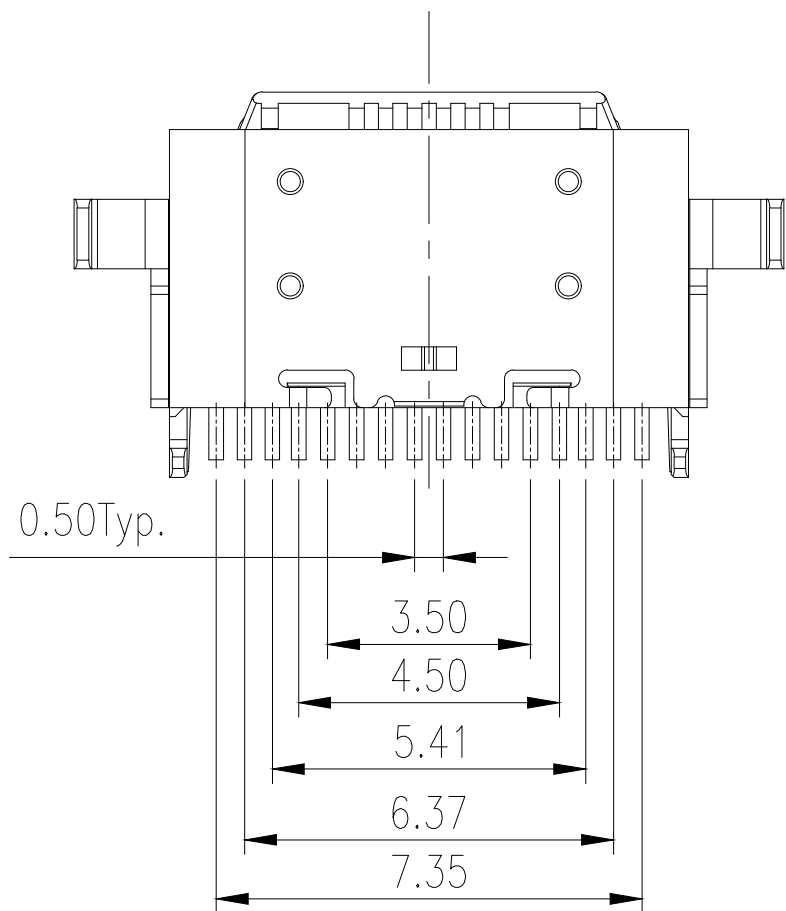

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

2	IM HOUSING	1 PCS	HIGH TEM. PLASTIC+COPPER ALLOY +STAINLESS STEEL	TERMINAL Au & Ni Plated
1	SHELL+OUT SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US2216AGB0095R

REVIEW TABLE FOR DETAILS





QUALITY SYMBOL	$\nabla = 0$	
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ± 0.25	X. ± 4.0
	.X ± 0.20	.X ± 3.0
$\blacktriangleright = 12$	.XX ± 0.15	.XX ± 2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
16 Pin USB Type C 沉板1.2H 外壳		RELEASE TO TOOLING	
4.80L Customer Drawing		DRAWN BY	DATE
		KATE DENG	
DOCUMENT NO.		CHECKED BY	DATE
		FAND	-----
		APPROVED BY	DATE
		Wang Yan	-----
DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	




frame size: A4
Rev.A 2022.04.09




REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

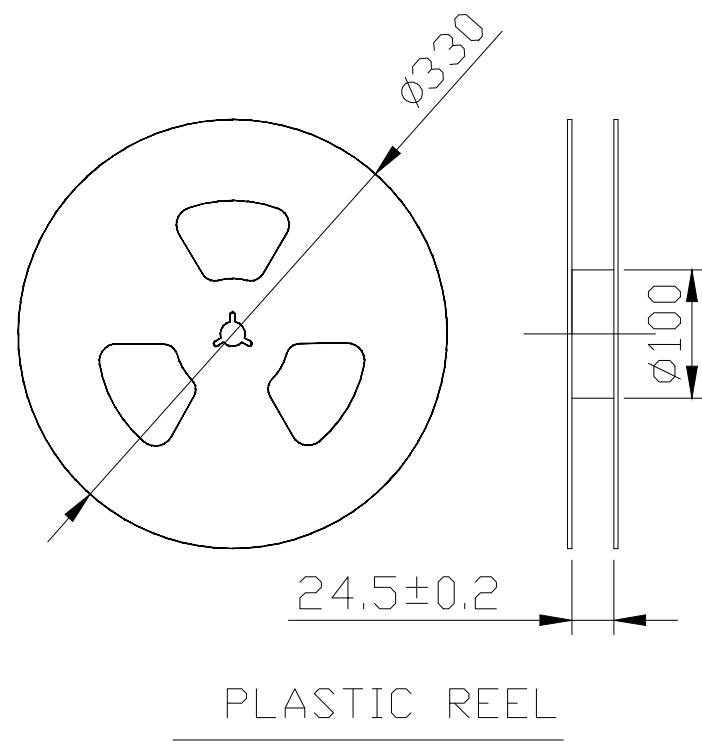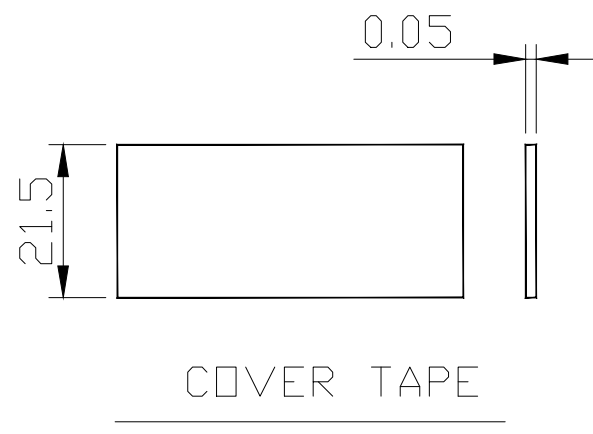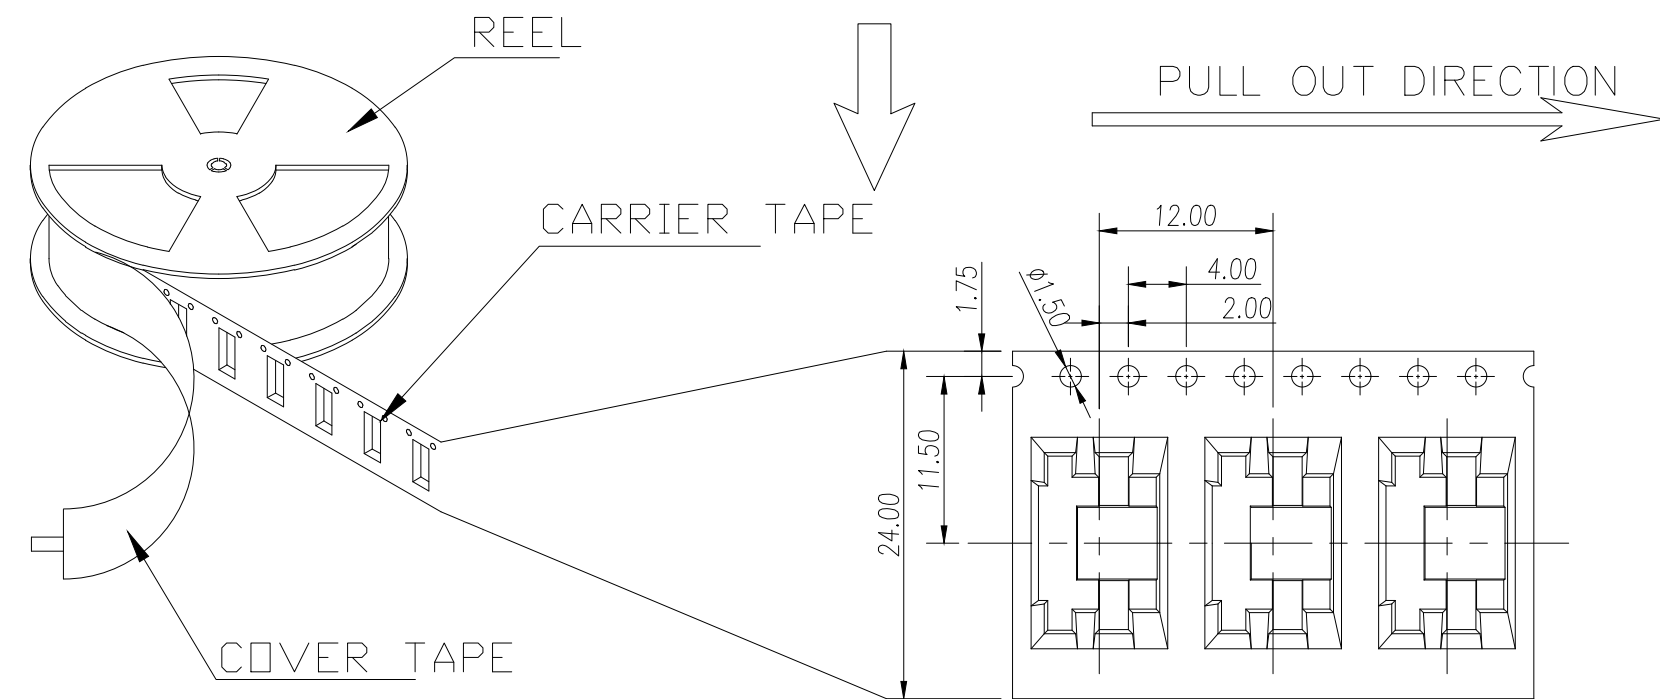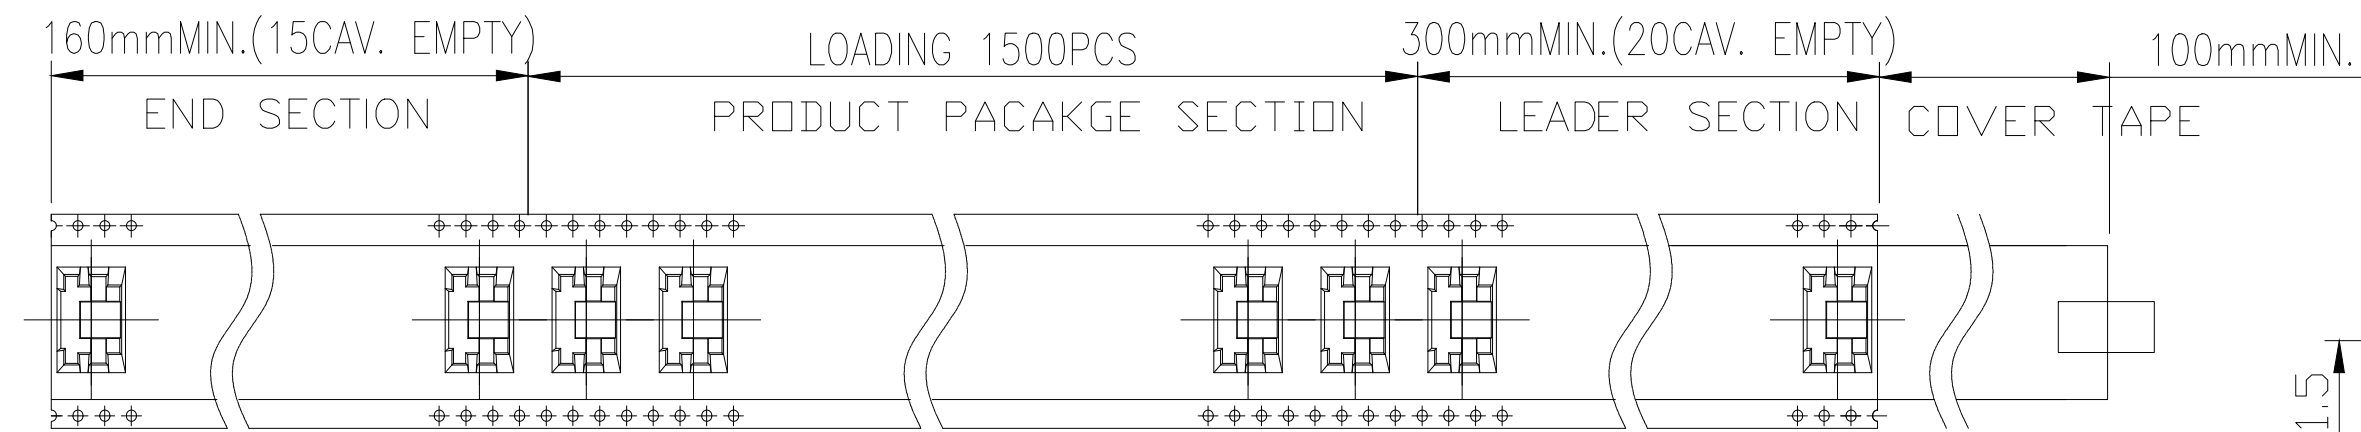

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

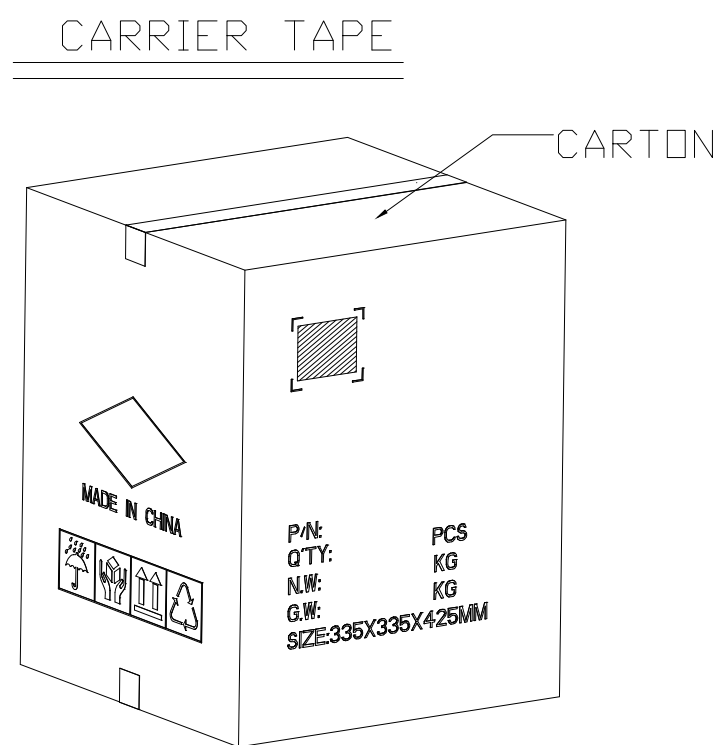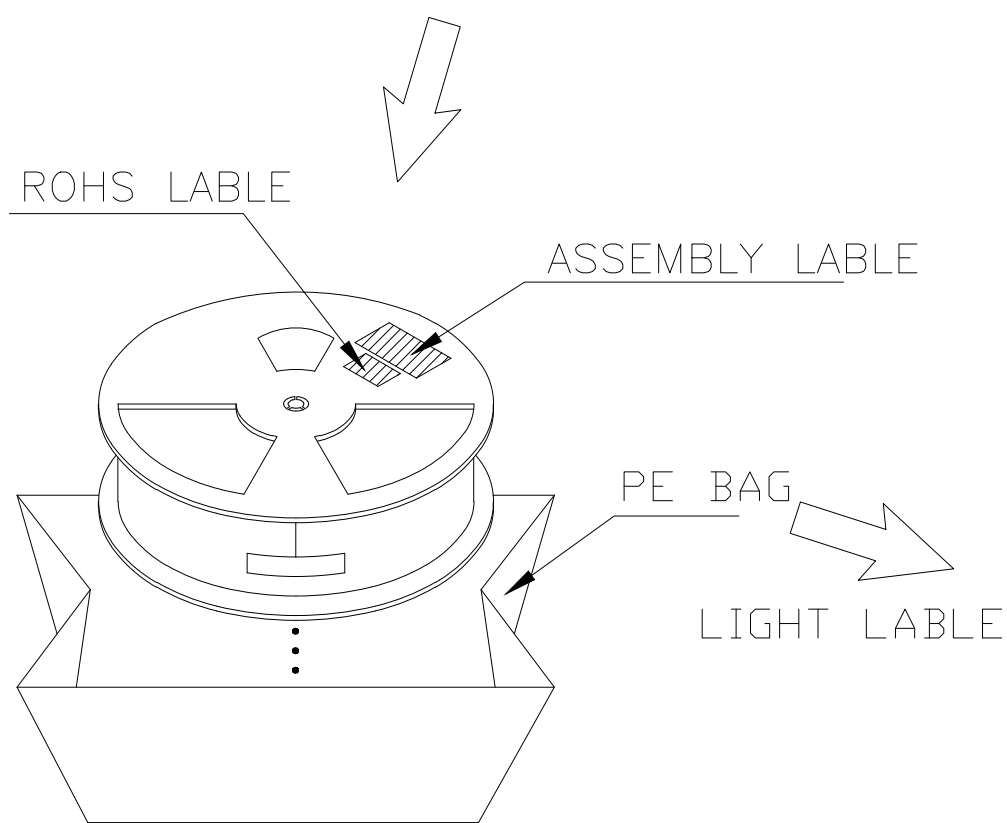

MATERIAL NO.:			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
JK-US2216AGB0095R			TITLE 16 Pin USB Type C 沉板1.2H 外壳 4.80L Customer Drawing			ECN DESCRIPTION RELEASE TO TOOLING								
REVIEW TABLE FOR DETAILS						DRAWN BY KATE DENG			DATE					
QUALITY SYMBOL ▽ = 12 ▲	GENERAL TOLERANCES (UNLESS SPECIFIED)		 J K F Technology Co.,Ltd			CHECKED BY FAND			DATE -----					
	X. ±0.25 X. ±4.0					DOCUMENT NO.			SHEET NO. 1 OF 1			APPROVED BY Wang Yan		
	.X ±0.20 .X ±3.0		DIMENSION STYLE MM ONLY			DESIGN UNITS METRIC			SCALE 10:1			 THIRD ANGLE PROJECTION		
	.XX ±0.15 .XX ±2.0													