

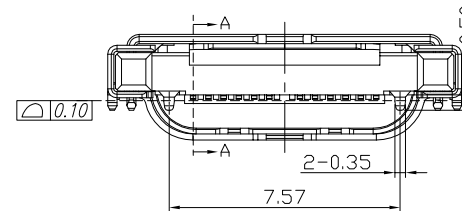
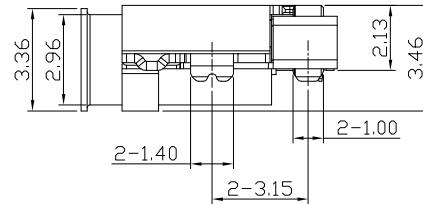
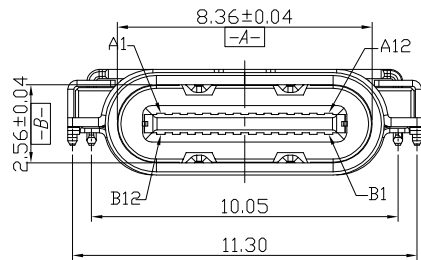
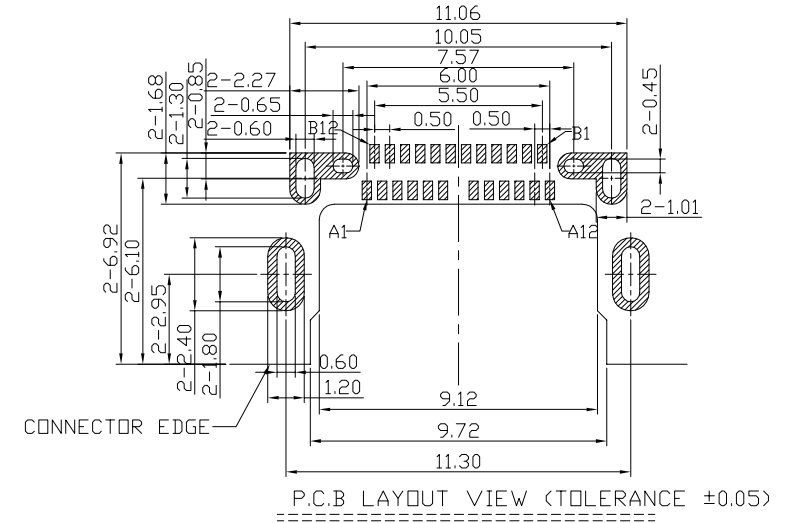


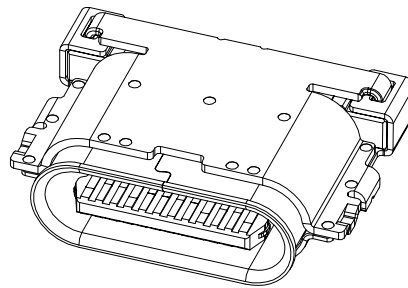

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

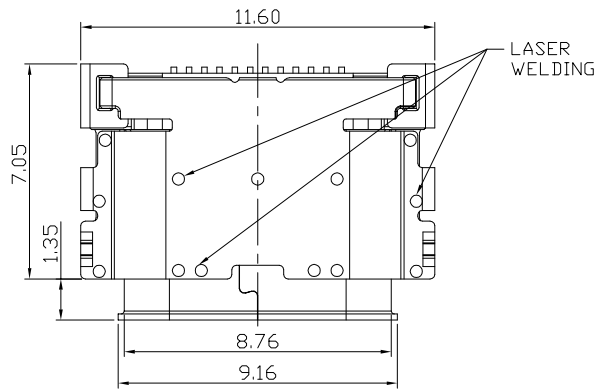


SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5 A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

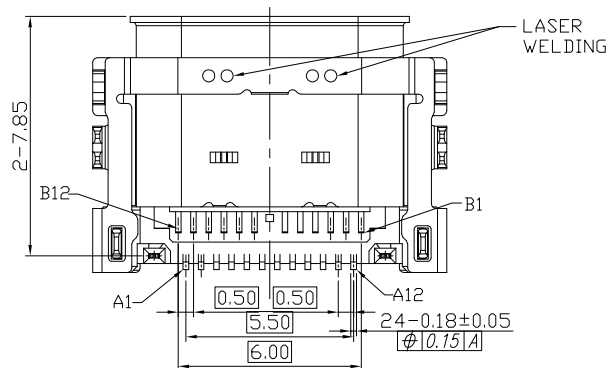

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

4	UP+DW_SHELL	1 PCS	STAINLESS STEEL	Ni Plated
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	IM HOUSING	1 PCS	PLASTIC	None
1	MAIN SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US2124AGB00116R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

X. ±0.25	X. ±4.0
.X ±0.20	.X ±3.0
.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
24 Pin USB Type C Mid_Mount 2.13H
8.40L Customer Drawing



DOCUMENT NO.

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SHEET NO.
1 OF 1

SCALE
10:1

ECN DESCRIPTION RELEASE TO TOOLING

DRAWN BY
KATE DENG

CHECKED BY
FAND

APPROVED BY
Wang Yan




THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09



REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1000 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

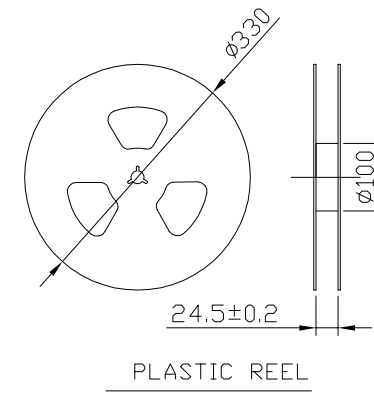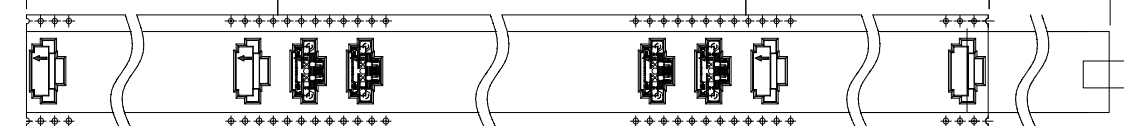


REEL

CARRIER TAPE

PULL OUT DIRECTION

COVER TAPE

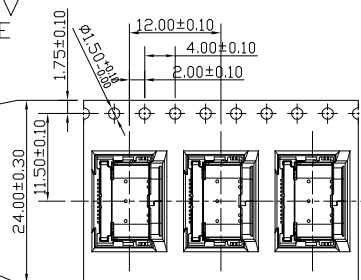

CARRIER TAPE

ROHS LABEL

ASSEMBLY LABEL

PE BAG

LIGHT LABEL

CARTON

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, ØA=330
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1000 PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(12000 PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US2124AGB00116R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽ = 0	X. ±0.25 X. ±4.0
▽ = 12	.X ±0.20 .X ±3.0
▽ = 12	.XX ±0.15 .XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE	ECN DESCRIPTION
24 Pin USB Type C Mid_Mount 2.13H 8.40L Customer Drawing	RELEASE TO TOOLING
JKF J K F Technology Co.,Ltd	DRAWN BY KATE DENG CHECKED BY FAND
DOCUMENT NO.	DATE
SHEET NO. 1 OF 1	DATE
DIMENSION STYLE MM ONLY	SCALE 10:1
DESIGN UNITS METRIC	THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09