

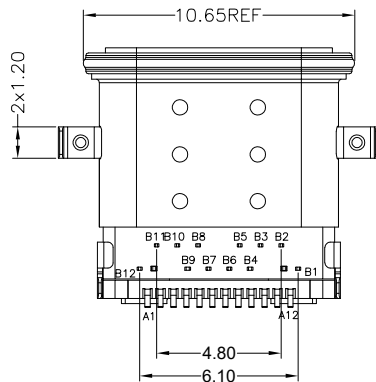

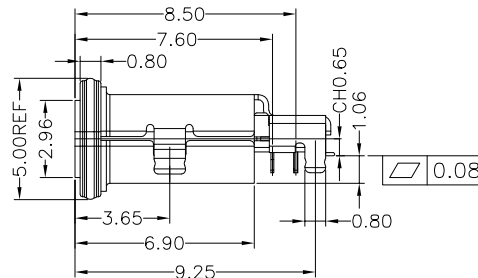
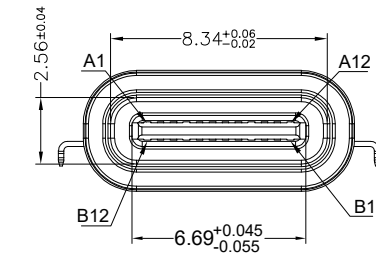
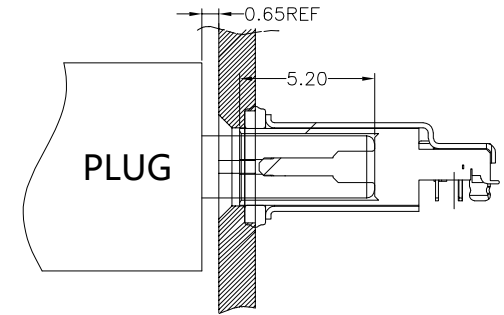
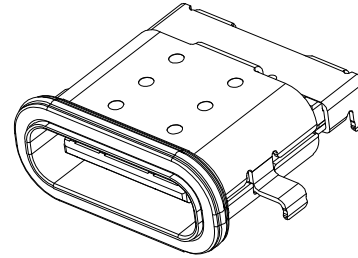



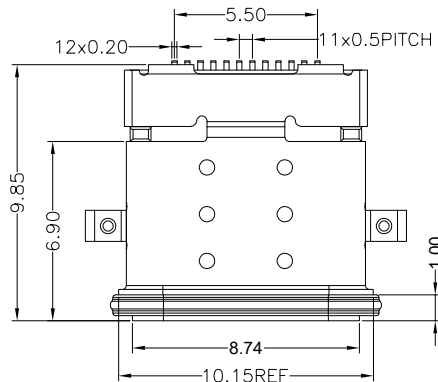


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXP1	SSTXN1	VBUS	CC1	D+	D-	SBU1	VBUS	SSRXN2	SSRXP2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	SSRXP1	SSRXN1	VBUS	SBU2	D-	D+	CC2	VBUS	SSTXN2	SSTXP2	GND

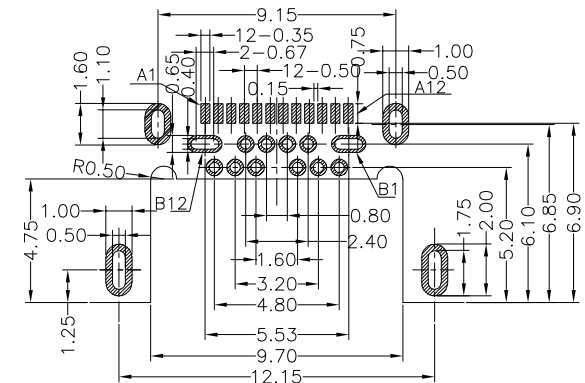




RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

1	OUT SHELL	STAINLESS STEEL	NI PLATED
2	MID PLATE	STAINLESS STEEL	SUS304 NO PLATED
3	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T BLACK UL 94 V-0
4	CONTACT	COPPER ALLOY(C7025)	AU PLATING ON CONTACT AREA
5	GND PLATE	STAINLESS STEEL	SUS304 NO PLATED
3	INNER SHELL	STAINLESS STEEL	NI PLATED
7	RING	SILICON	
NO.	PARTS	MATERIAL	REMARKS






GENERAL TOLERANCES	UNIT	mm	
DISTANCE X.			
X.	±0.25		
.X	±0.20		
.XX	±0.15		
.XXX	±0.10		
ANGLE			
X.	±3.0°		
.X	±2.0°		
.XX	±1.0°		

杰康富精密电子有限公司	
J K F precision Electronics Co., LTD	
TITLE:	USB 3.1 TYPE-C端子前插后贴沉板1.1四脚插
PART NO.	JK-US3224AGB170R
DRAWING NO.	
SCALE	1:1
SIZE	A3
SHEET	1 OF 1
REV.	A

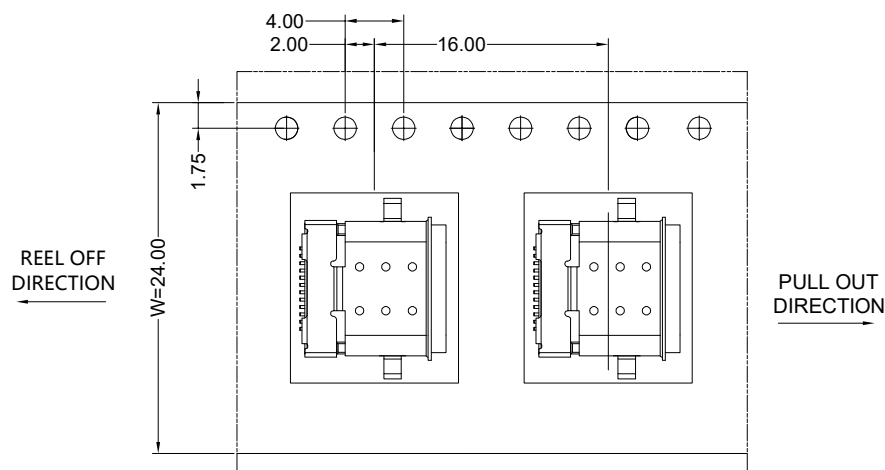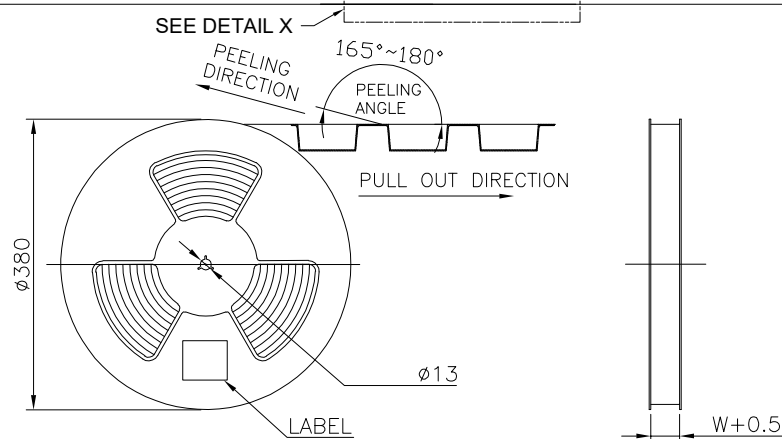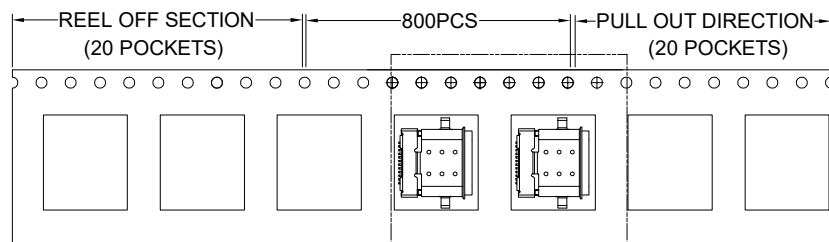

每盘真空包装

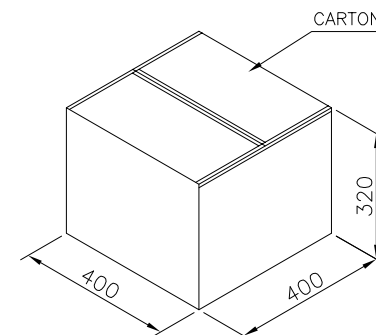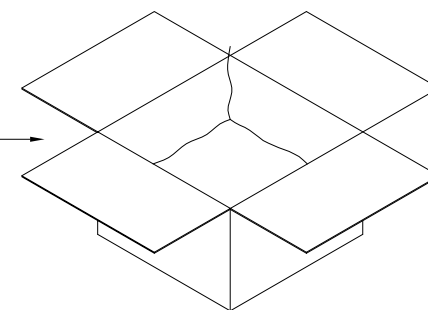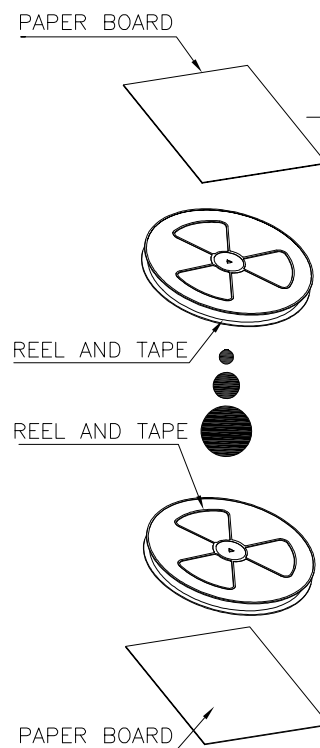

	REEL	CARTON
CONNECTOR (PCS)	800	8000

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 J K F precision Electronics Co., LTD							
DISTANCE X.		MATERIAL		SEE NOTES									
X. ±0.25		FINISHED		SEE NOTES		TITLE:USB 3.1 TYPE-C端子前插后贴沉板1.1四脚插							
.X ±0.20		APPROCED		KATE DENG									
.XX ±0.15		CHECKED		KATE DENG		PART NO.	JK-US3224AGB170R						
.XXX ±0.10		DESIGN		FAND		DRAWING NO.							
ANGLE		DRAWN		Wang Yan		SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
X. ±3.0°													
.X ±2.0°													
.XX ±1.0°													

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------