
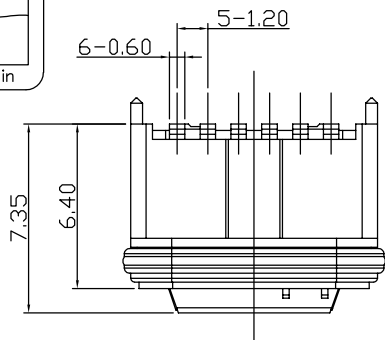

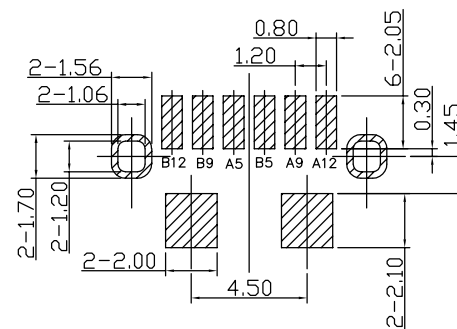

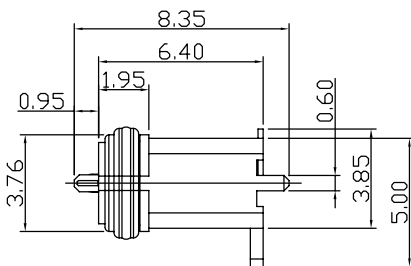
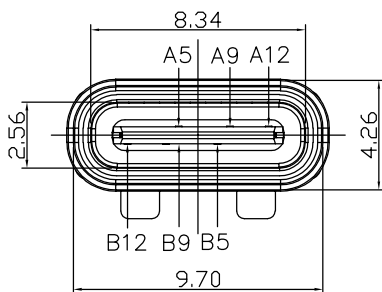




组装示意图

开孔尺寸参考

组装外壳时需要打环保润滑油

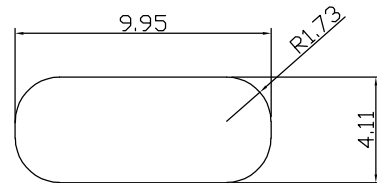

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

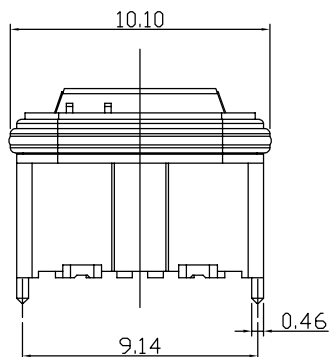

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	MID PALTE	1	SUS301	T=0.15mm
4	O RING	1	SILICON RUBBER	WHITE
3	Shell	1	Kirsite Ni 40-80u"	WHITE
2	Contact	6	Brass Ni 50U"; Au 1U"Plating	T=0.20mm
1	Housing	1	PA10T (G.F30%)	BLACK
ITEM	PART NAME	Q'TY	FINISH	NOTE

GENERAL TOLERANCES		UNIT	mm			杰康富精密电子有限公司 J K F precision Electronics Co., LTD							
DISTANCE X.		MATERIAL	SEE NOTES										
.X ±0.25		FINISHED	SEE NOTES										
.XX ±0.15		APPROCED	KATE DENG										
.XXX ±0.10		CHECKED	KATE DENG			TITLE:		USB TYPE C 6PIN(立贴) IPX7					
ANGLE		DESIGN	FAND			PART NO.		JK-US6406AGB0154R					
.X. ±3.0°		DRAWN	Wang Yan			DRAWING NO.		0030IPX7					
.X ±2.0°						SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
.XX ±1.0°													