

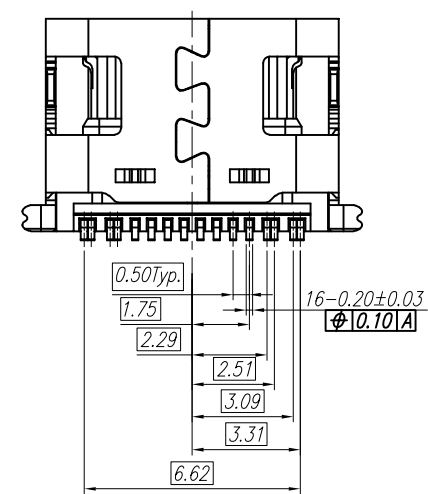
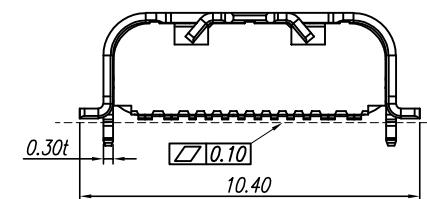
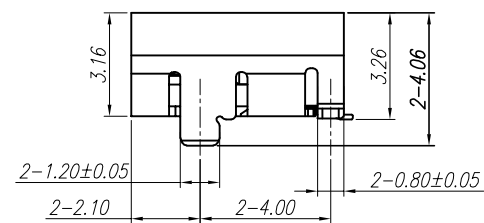
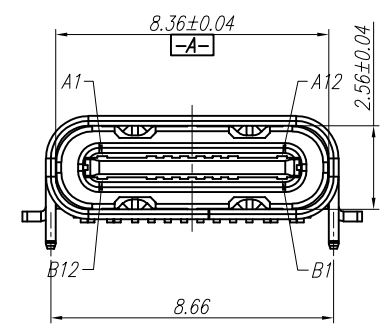


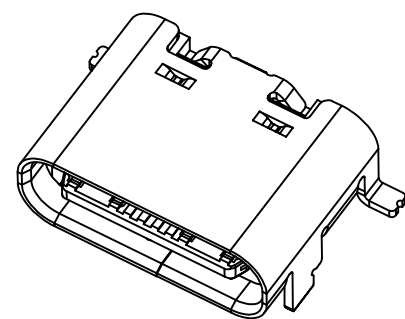


REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 CURRENT RATING: 5A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
 - 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
- 3.SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CANNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

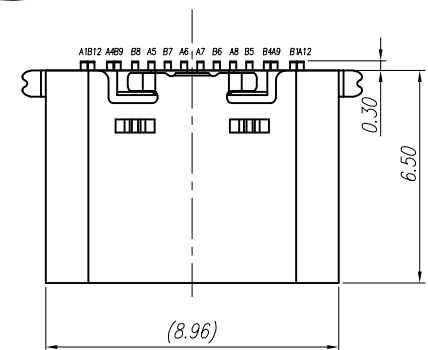

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

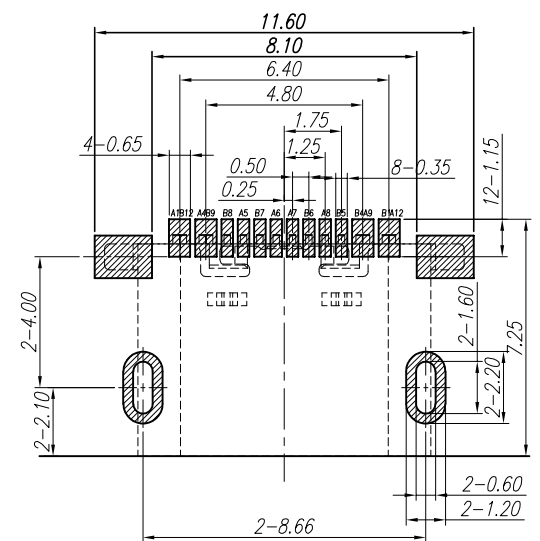

P.C.B LAYOUT VIEW TOLERANCE ±0.05

MATERIAL NO.:

JK-US3216AGB00131R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)
	▽ = 12	X±0.60 X*±5.0°
		.X±0.35 .X*±3.0°
		.XX±0.25 .XX*±2.5°
		.XXX±0.15 .XXX*±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

16 Pin USB Type C 板上型前插后贴

DOCUMENT NO.

SCALE

MM ONLY

DESIGN UNITS

METRIC

SHEET NO.

1 OF 1

10: 1

THIRD ANGLE PROJECTION

ECN DESCRIPTION

RELEASE TO TOOLING

DRAWN BY

KATE DENG

CHECKED BY

FAND

APPROVED BY

Wang Yan






DATE

DATE

DATE

RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	????	2022.04.09	

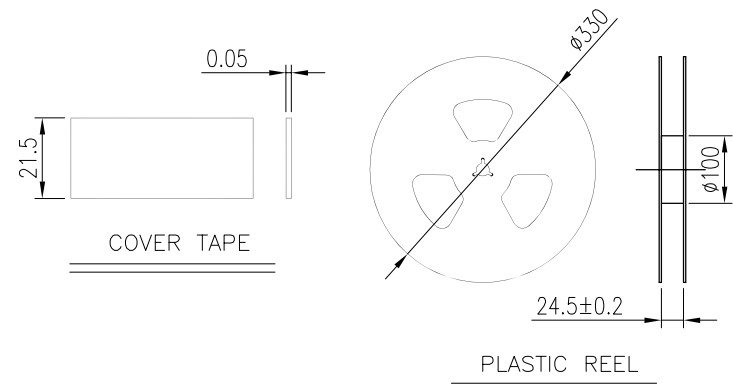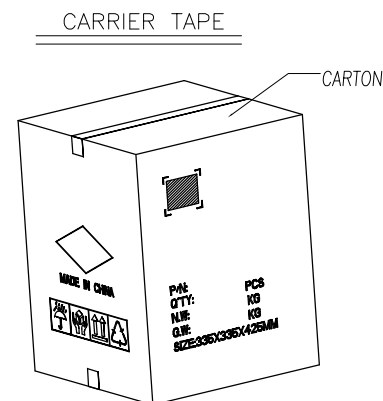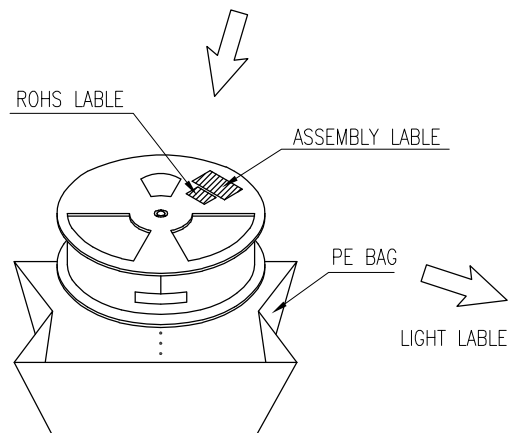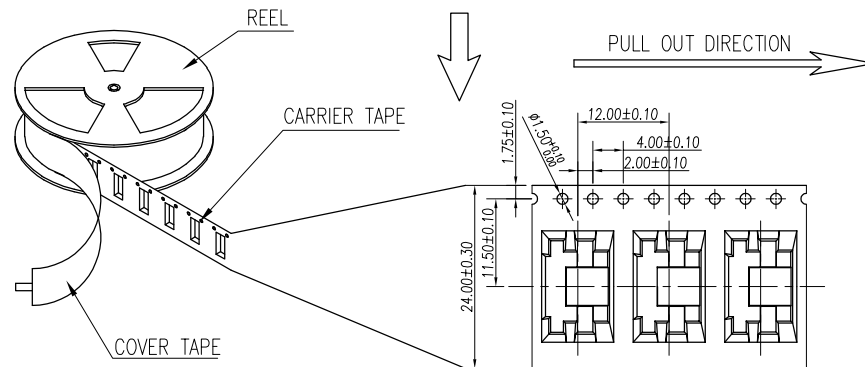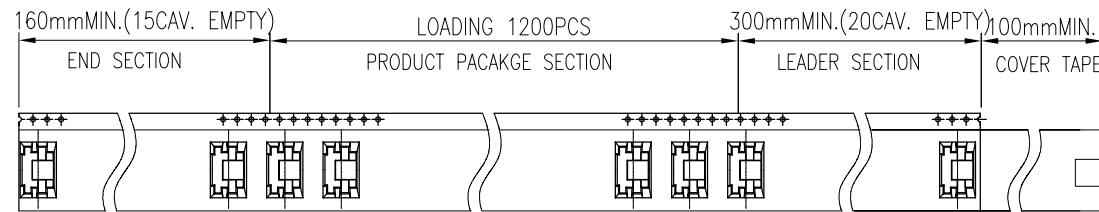

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, øA=330
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1200PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(14400PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US3216AGB00131R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		16 Pin USB Type C 板上型前插后贴		RELEASE TO TOOLING	
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE
	X. ±0.25	X. ±4.0	KATE DENG		DATE
	.X ±0.20	.X ±3.0	CHECKED BY		DATE
	.XX ±0.15	.XX ±2.0	FAND		DATE
		DOCUMENT NO.		APPROVED BY	
		J K F Technology Co.,Ltd		Wang Yan	
		SHEET NO.		THIRD ANGLE PROJECTION	
		1 OF 1		frame size: A4	
		DIMENSION STYLE		Rev.A 2022.04.09	
		MM ONLY			
		DESIGN UNITS			
		METRIC			
		SCALE			
		10:1			