

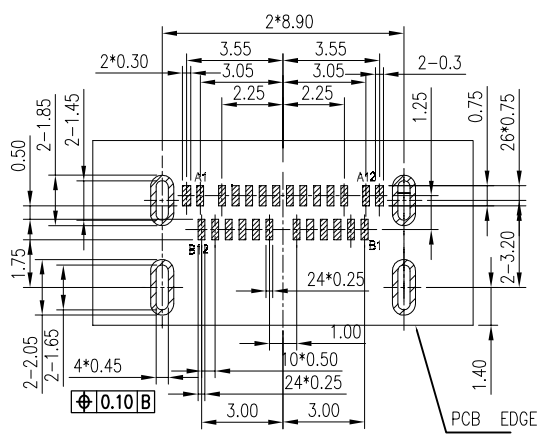
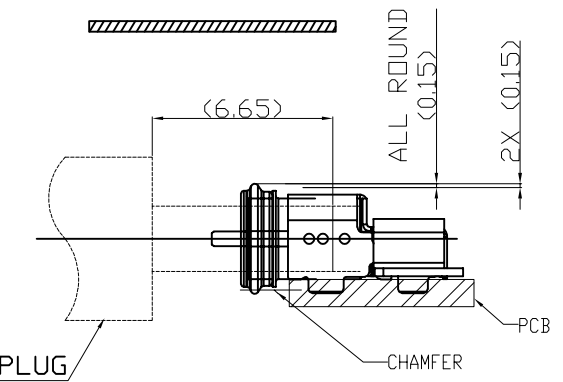
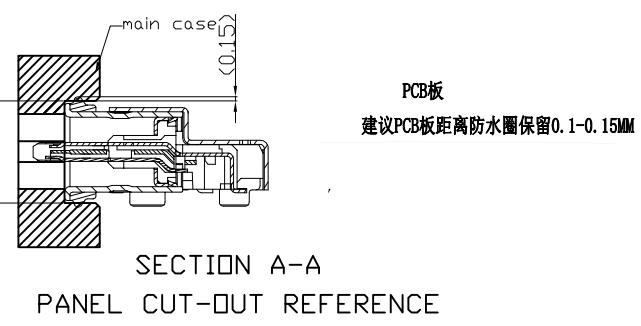


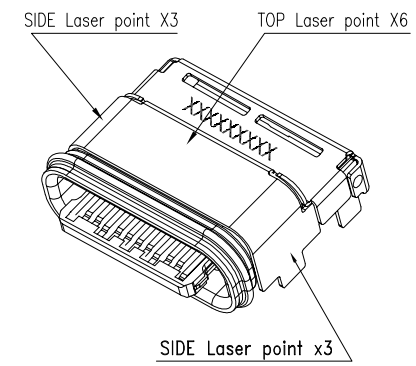

RECOMMENDED PCB LAYOUT
(Tolerance=±0.05)

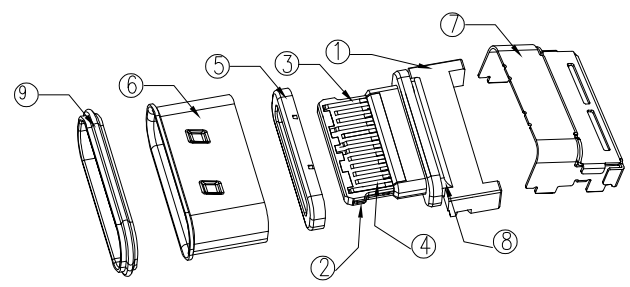







说明:

1. Colplanarity: 0.08最大红外线前。 , 0.10mm MAX
2. 舌PIN的位置:IR前 : 0.08mm MAX; IR 后0.12mm MAX;
3. P/N:
4. 包装方式 : 载带包装
5. 接触区和焊接区无毛刺, 除特说明, 冲压毛刺为0.05mm MAX。
6. 未标注尺寸公差为依自由公差为准。
7. 成品端子平面度必须100%检测。
8. 成品可靠性测试要求参照规格书。
9. 产品满足 ROHS 2.0

9	密封圈	1PCS	硅胶, 黑色	
8	胶水	1PCS	环氧胶, 黑色	
7	外壳	1PCS	SUS304 , T=0.15. 镀镍50u" MIN.	
6	内拉伸壳	1PCS	SUS304, T=0.20.	
5	EMI拉伸壳	1PCS	SUS304 , T=0.12. 镀镍50u" MIN.	
4	上排端子	1SET	C18400, T=0.12. 底层镀镍 50-100u", 功能接触区单面	
3	下排端子	1SET	刷镀 Au 15u", 焊接区双面镀金 G/F.	
2	中板	1PCS	SUS301-1/4 H, 镀镍50u" MIN.	
1	塑胶	1PCS	PA46 BLACK	
项目	组成部件	用量	材质/处理	备注

GENERAL TOLERANCES		UNIT	mm
DISTANCE	X.	±0.25	
	.X	±0.20	
	.XX	±0.15	
	.XXX	±0.10	
	ANGLE	±3.0°	
	.X	±2.0°	
	.XX	±1.0°	

杰康富精密电子有限公司	
J K F precision Electronics Co., LTD	
TITLE:	TYPE C/F 24PIN 防水IP68板上双贴 SMT
PART NO.	JK-US4024AGB0042R
DRAWING NO.	224-091
SCALE	1:1
SIZE	A3
SHEET	1 OF 1
REV.	A

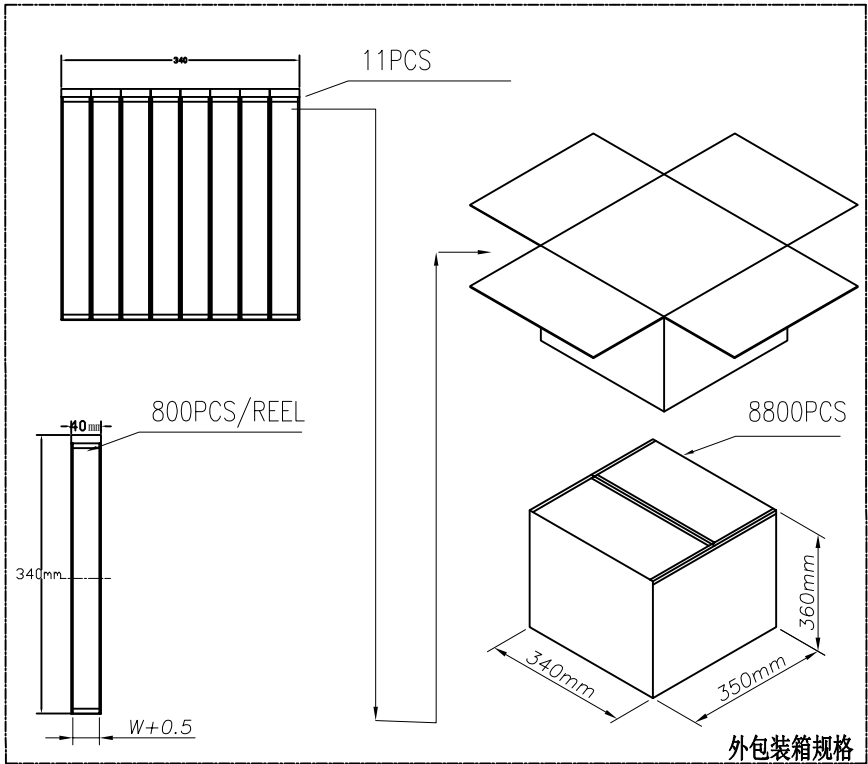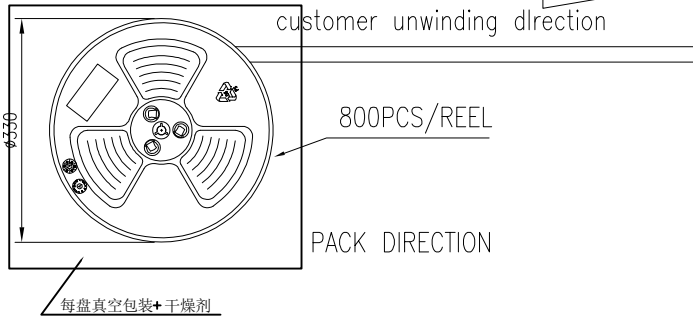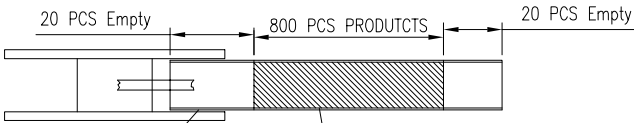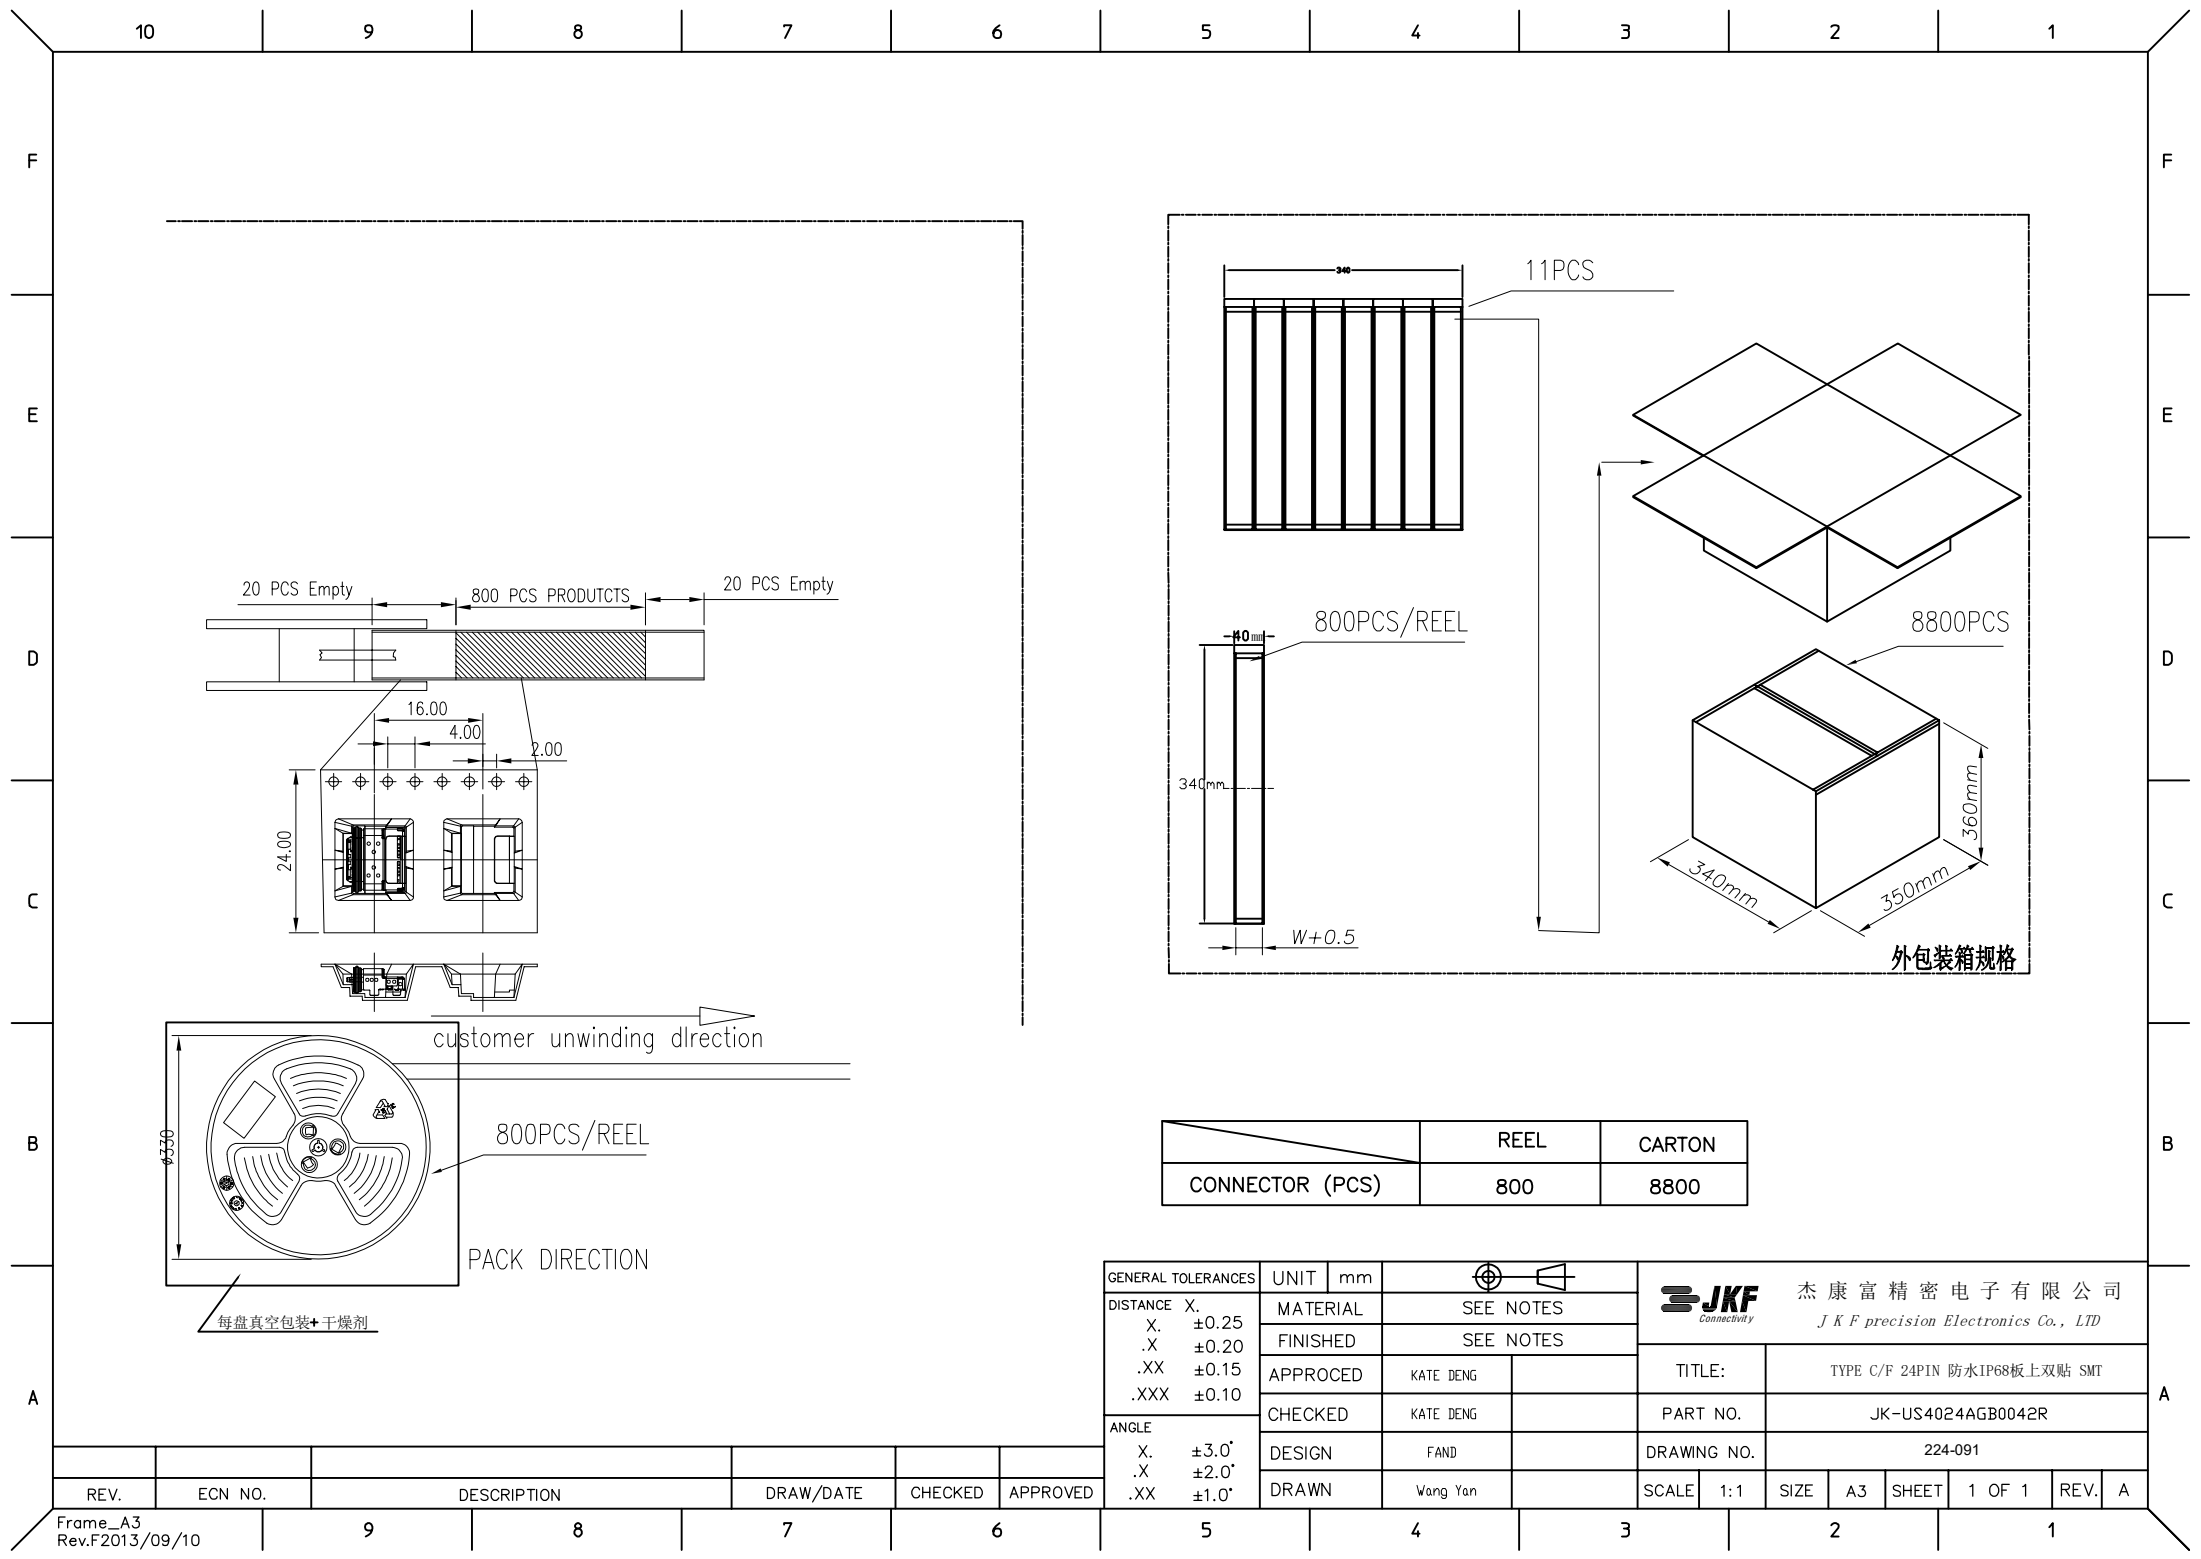

	REEL	CARTON
CONNECTOR (PCS)	800	8800

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

Frame_A3
Rev.F2013/09/10

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	±0.25		SEE NOTES	
	.X	±0.20		SEE NOTES	
	.XX	±0.15		APPROVED	KATE DENG
	.XXX	±0.10		CHECKED	KATE DENG
ANGLE	X.	±3.0°		DESIGN	FAND
	.X	±2.0°		DRAWN	Wang Yan
	.XX	±1.0°			

JKF Connectivity		杰康富精密电子有限公司 JKF precision Electronics Co., LTD			
TITLE:		TYPE C/F 24PIN 防水IP68板上双贴 SMT			
PART NO.		JK-US4024AGB0042R			
DRAWING NO.		224-091			
SCALE	1:1	SIZE	A3	SHEET	1 OF 1
REV.	A				