

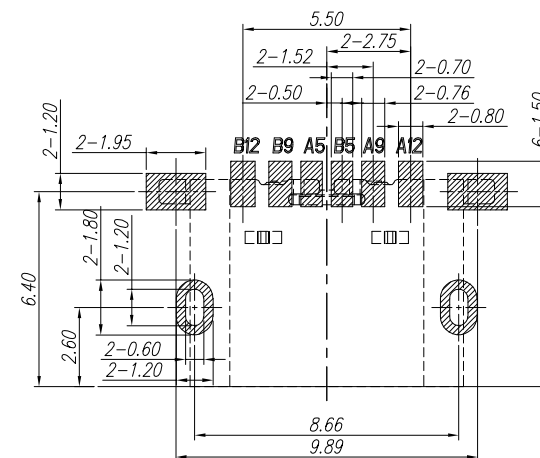

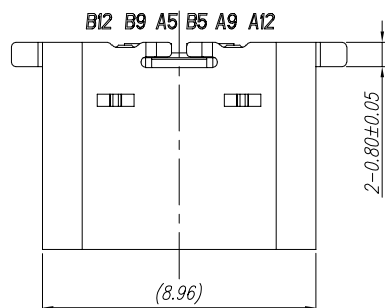
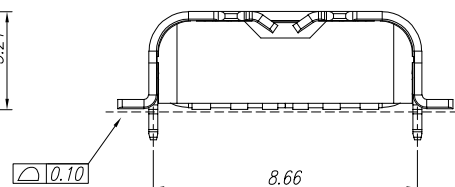


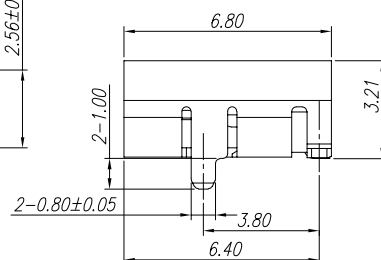

P.C.B LAYOUT VIEW TOLERANCE ±0.05

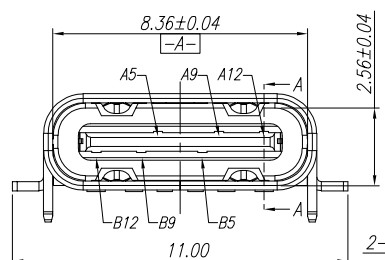

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 3A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

- 3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDENDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBU2	D+	D-	CC2	VBUS	TX2-	TX2+	GND		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

2	I/M HOUSING	1 PCS	PLASTIC+COPY AOLLY+STAINLESS STEEL	Au & Ni Plated
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US3206AGB0150R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
= 0GENERAL TOLERANCES
(UNLESS SPECIFIED)

X. ±0.25	X. ±4.0
.X ±0.20	.X ±3.0
.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION






TITLE		ECN DESCRIPTION	
6 Pin USB Type C On Board 6.80L 3.21H 前插后贴		RELEASE TO TOOLING	
J K F Technology Co.,Ltd		DRAWN BY	DATE
		KATE DENG	
DOCUMENT NO.		CHECKED BY	DATE
		FAND	----
SHEET NO. 1 OF 1		APPROVED BY	DATE
		Wang Yan	----
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 10:1	THIRD ANGLE PROJECTION



REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1500PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

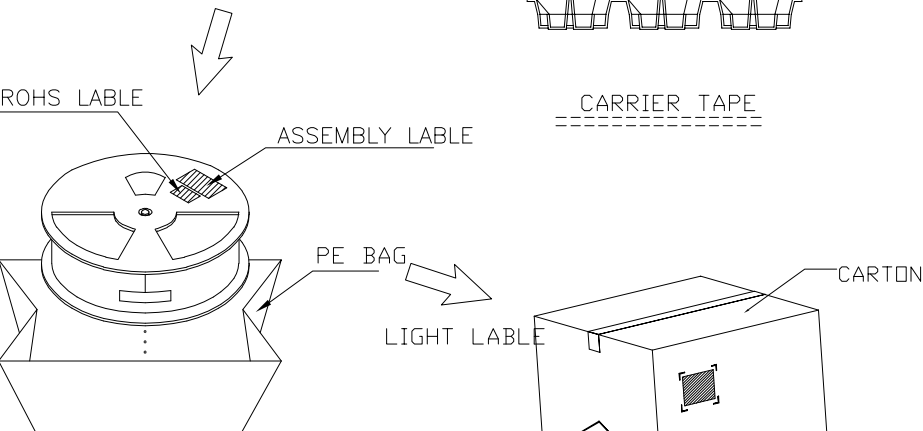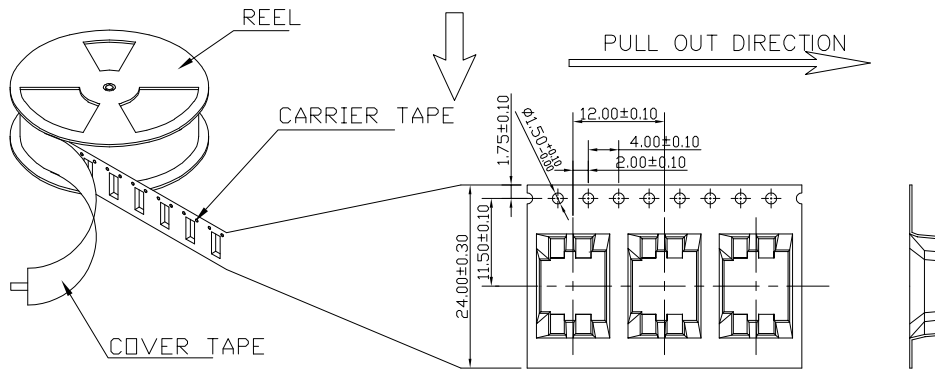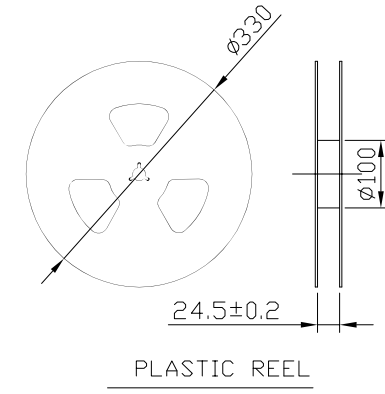

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1500PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US3206AGB0150R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ± 0.25	X. ± 0.0
	.X ± 0.20	.X ± 0.0
	.XX ± 0.15	.XX ± 0.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
6 Pin USB Type C On Board 6.80L 3.21H 前插后贴		RELEASE TO TOOLING	
 J K F Technology Co.,Ltd		DRAWN BY	DATE
		KATE DENG	
DOCUMENT NO.		CHECKED BY	DATE
		FAND	
SCALE		APPROVED BY	DATE
		Wang Yan	
DIMENSION STYLE	DESIGN UNITS	THIRD ANGLE PROJECTION	
MM ONLY	METRIC		

SHEET NO.
1 OF 1

SCALE
10:1



frame size: A4
Rev.A 2022.04.09