





REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	



SPECIFICATION:





1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 3A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNNOT INDENDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

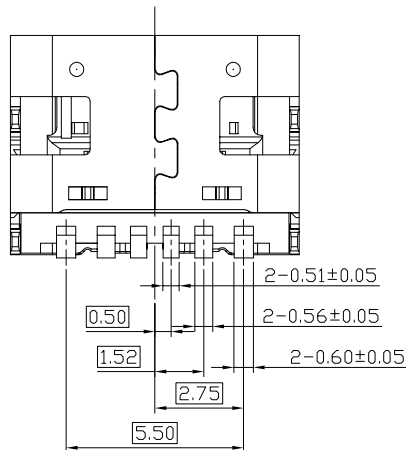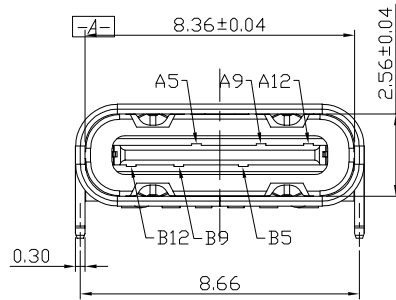

MATERIAL NO: JK-US3206AGB009R				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
REVIEW TABLE FOR DETAILS				TITLE 6 Pin USB Type C On Board 6.80L Customer Drawing			ECN DESCRIPTION RELEASE TO TOOLING			
QUALITY SYMBOL ▽ = 0 ▽ = 0 ▲	GENERAL TOLERANCES (UNLESS SPECIFIED)			 J K F Technology Co.,Ltd			DRAWN BY KATE DENG		DATE	
	X. ±0.25	X. ±4.0°					CHECKED BY FAND		DATE -----	
	.X ±0.20	.X ±3.0°		APPROVED BY Wang Yan		DATE -----				
	.XX ±0.15	.XX ±2.0°		SHEET NO. 1 OF 3						
	DISTANCE	ANGLE		DOCUMENT NO.						
DIMENSION STYLE MM ONLY			DESIGN UNITS METRIC		SCALE 10:1				THIRD ANGLE PROJECTION	
5			4		3		2		frame size: A4 Rev.A 2022.04.09	



Pin	Signal Name	Pin	Signal Name	Pin	Signal Name	Pin	Signal Name
A1	GND	B12	GND	A7	D-	B6	D+
A2	TX1+	B11	RX1-	A8	SBU1	B5	CC2
A3	TX1-	B10	RX1+	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	RX2-	B3	TX2+
A5	CC1	B8	SBU2	A11	RX2+	B2	TX2+
A6	D+	B7	D-	A12	GND	B1	GND




MATERIAL NO: JK-US3206AGB009R		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REVIEW TABLE FOR DETAILS		TITLE 6 Pin USB Type C On Board 6.80L Customer Drawing		ECN DESCRIPTION RELEASE TO TOOLING	
QUALITY SYMBOL ▽ = 0 ◀ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY KATE DENG		DATE
	X. ±0.25	X. ±1.0	CHECKED BY FAND		DATE ----
	.X ±0.20	.X ±3.0	APPROVED BY Wang Yan		DATE -----
	.XX ±0.15	.XX ±2.0			
	DISTANCE	ANGLE			
		DOCUMENT NO.		SHEET NO. 2 OF 3	
		DIMENSION STYLE MM ONLY		SCALE 10:1	THIRD ANGLE PROJECTION
5		4		3	
				2	
				frame size: A4 Rev.A 2022.04.09	

RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1000PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACKAGE SECTION LEADER SECTION COVER TAPE

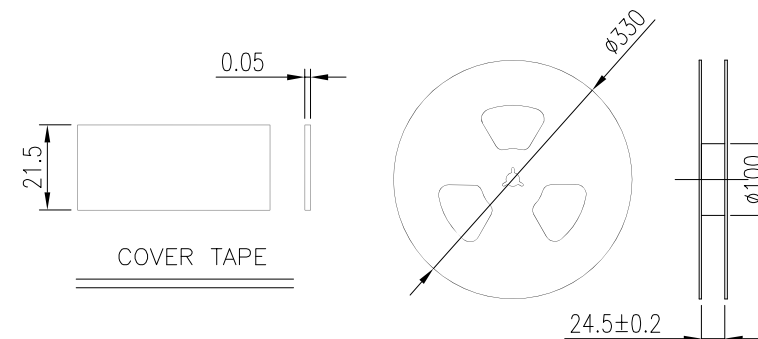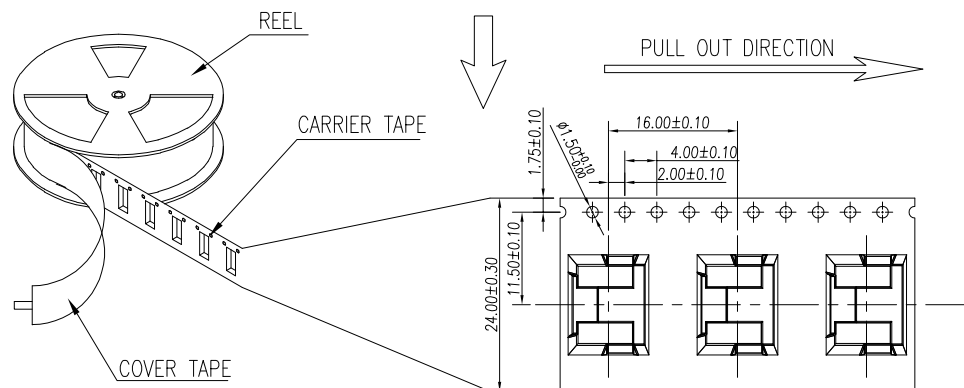

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, ØA=330
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1000PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(12000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

ROHS LABEL

ASSEMBLY LABEL

PE BAG

LIGHT LABEL

CARRIER TAPE

CARTON

MATERIAL NO.:

JK-US3206AGB009R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0°
	.X ±0.20	.X ±3.0°
	.XX ±0.15	.XX ±2.0°
	DISTANCE	ANGLE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
6 Pin USB Type C On Board 6.80L		RELEASE TO TOOLING	
Customer Drawing		DRAWN BY	DATE
 J K F Technology Co.,Ltd		KATE DENG	
		CHECKED BY	DATE
DOCUMENT NO.		FAND	----
SHEET NO.		APPROVED BY	DATE
		Wang Yan	----
DIMENSION STYLE		SCALE	THIRD ANGLE PROJECTION
MM ONLY		10:1	
DESIGN UNITS			
METRIC			

frame size: A4
Rev.A 2022.04.09