


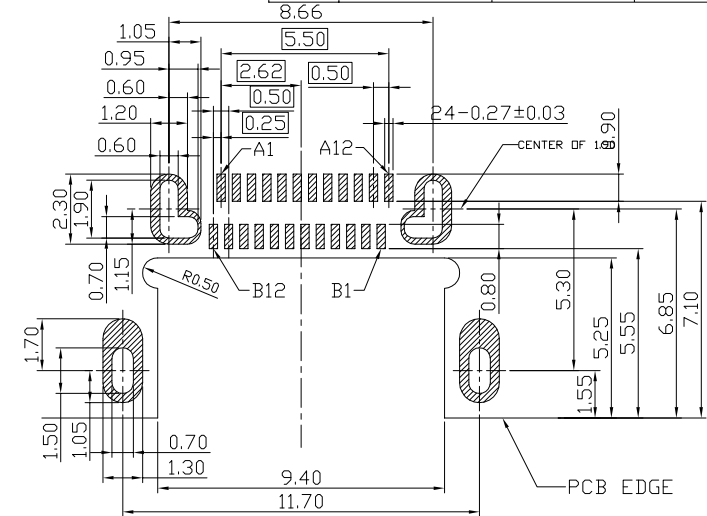
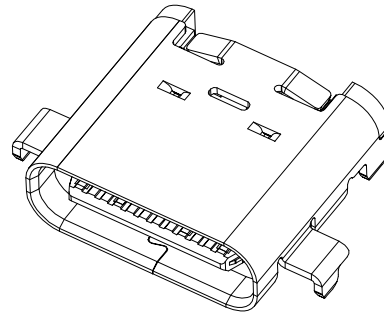
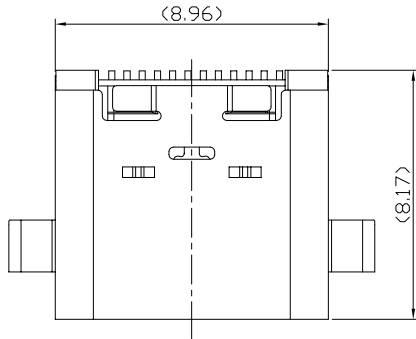


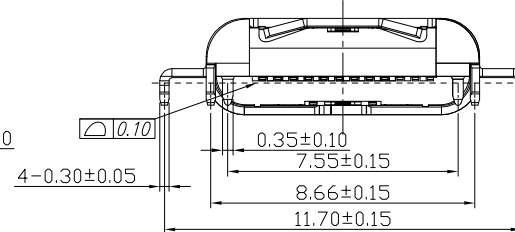

REV	ECN No.	DATE	REMARK
	原始圖檔	2022.04.09	

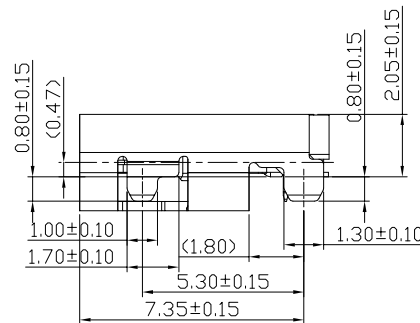

P.C.B LAYOUT VIEW TOLERANCE ± 0.05

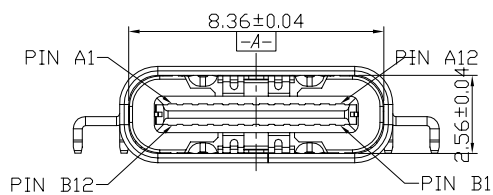

SPECIFICATION:



1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5 A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

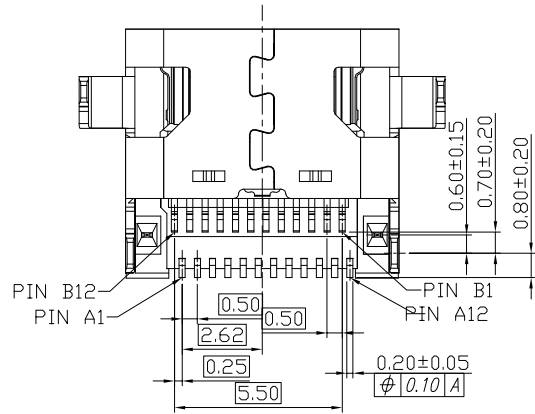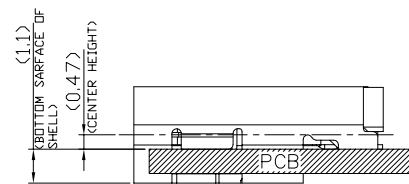

PIN ASSIGNMENT													
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	BLADE	SHELL
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBUS1	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBUS2	D+	D-	CC2	VBUS	TX2-	TX2+	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

MATERIAL NO.:

JK-US2024AGB00108R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ± 0.25	X. ± 0.4
	.X ± 0.20	.X ± 0.3
	.XX ± 0.15	.XX ± 0.2

2	MOLDING HOUSING	1 PCS	PLASTIC +COPPER OLLY+ STAINLESS STEEL	Au & Ni Plated
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
24 Pin USB Type C Mid_mount 2.05H		RELEASE TO TOOLING	
Customer Drawing		DRAWN BY	DATE
		KATE DENG	
		CHECKED BY	DATE
		FAND	
DOCUMENT NO.		APPROVED BY	DATE
		Wang Yan	
DIMENSION STYLE		SCALE	THIRD ANGLE PROJECTION
MM ONLY		10:1	





frame size: A4
Rev.A 2022.04.09



REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1500 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

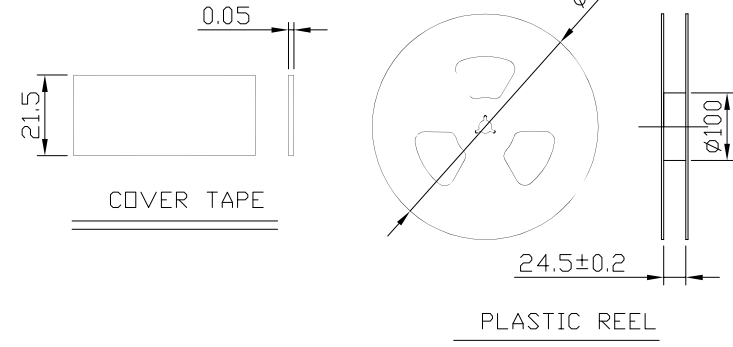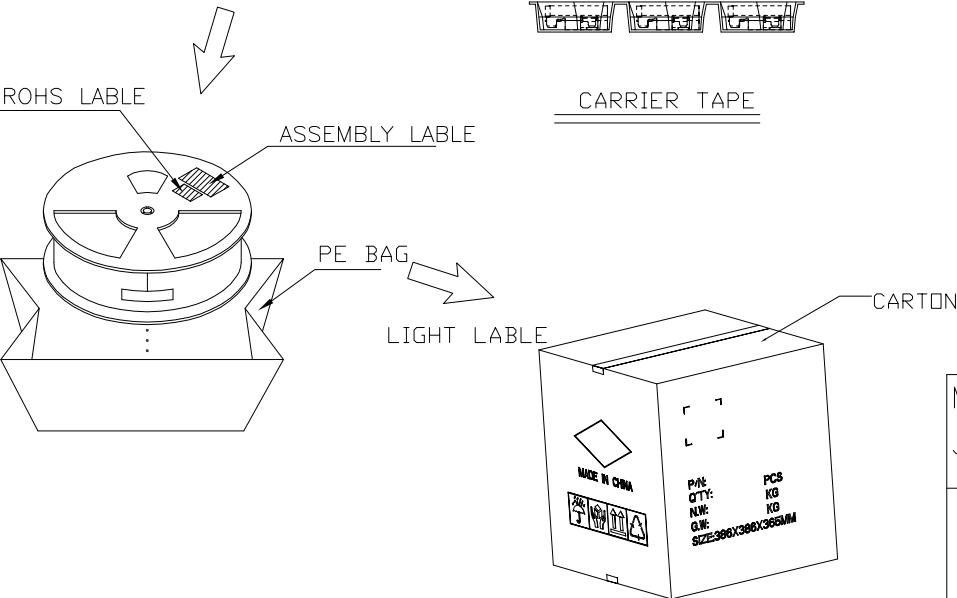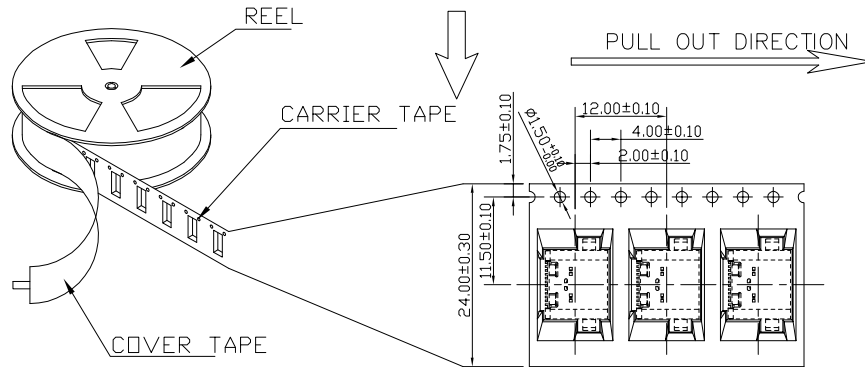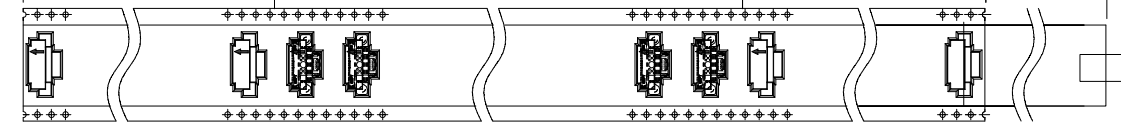

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500 PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(1800 PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US2024AGB00108R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		24 Pin USB Type C Mid_mount 2.05H		RELEASE TO TOOLING	
		Customer Drawing		DRAWN BY	DATE
				KATE DENG	
				CHECKED BY	DATE
				FAND	----
				APPROVED BY	DATE
				Wang Yan	----
QUALITY SYMBOL ▽ = 12 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DOCUMENT NO.	SHEET NO.	
	X. ± 0.25	X. ± 0.4	J K F Technology Co.,Ltd	1 OF 1	
	.X ± 0.20	.X ± 0.3			
	.XX ± 0.15	.XX ± 0.2			
		DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
		MM ONLY	METRIC	10:1	
				frame size: A4	Rev.A 2022.04.09