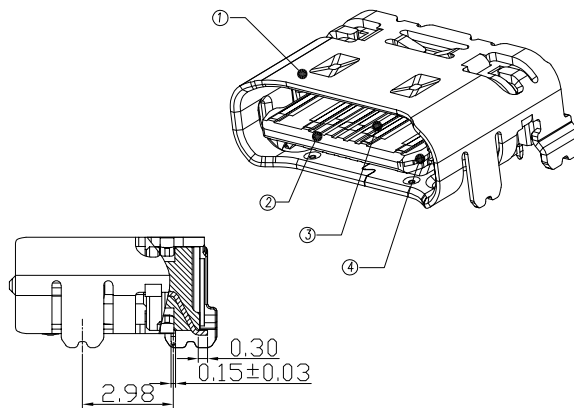
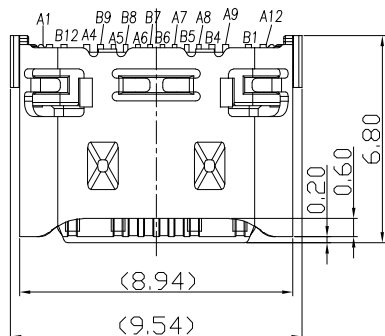
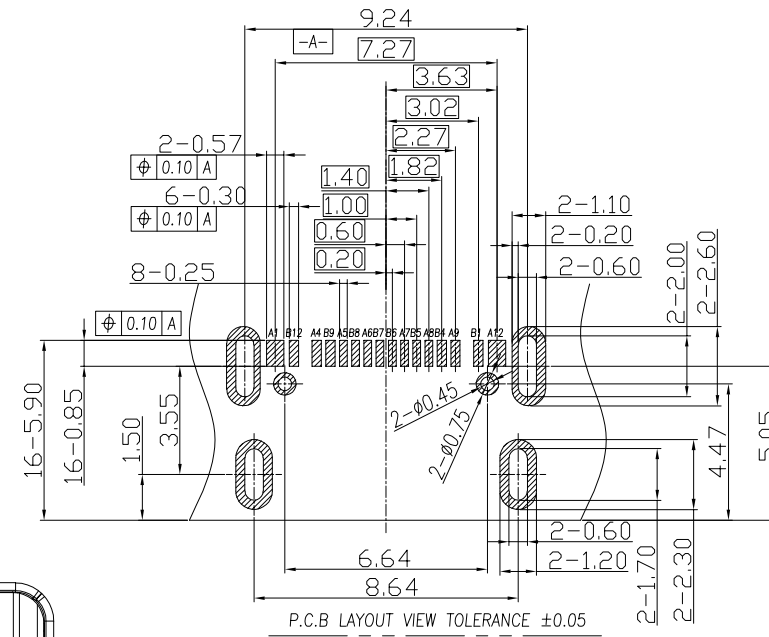
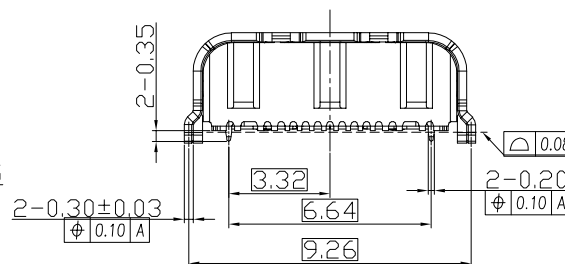
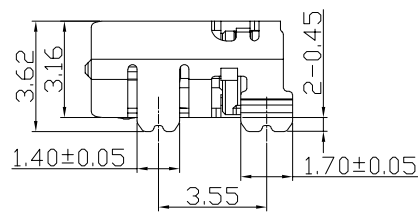



SECTION A-A
-----

P.C.B LAYOUT VIEW TOLERANCE ±0.05

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.




2	MOLDING HOUSING	1 PCS	PLASTIC+COPPER ALLOY	None/Au & Ni Plated
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:
JK-US3216AGB0062R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0
	.X ±0.20	.X ±3.0
	.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE 16 Pin 板上型 TYPE C USB Customer Drawing		ECN DESCRIPTION RELEASE TO TOOLING	
J K F Technology Co.,Ltd		DRAWN BY KATE DENG	DATE -----
		CHECKED BY FAND	DATE -----
DOCUMENT NO.		SHEET NO. 1 OF 1	APPROVED BY Wang Yan
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC	SCALE 10:1
THIRD ANGLE PROJECTION			

160mmMIN.(15CAV. EMPTY) LOADING 1000 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACKAGE SECTION LEADER SECTION COVER TAPE

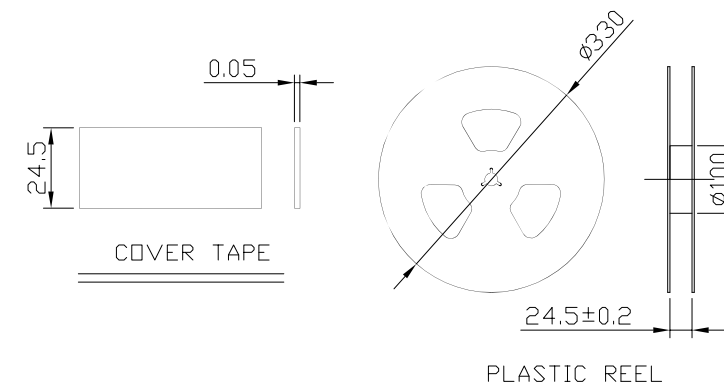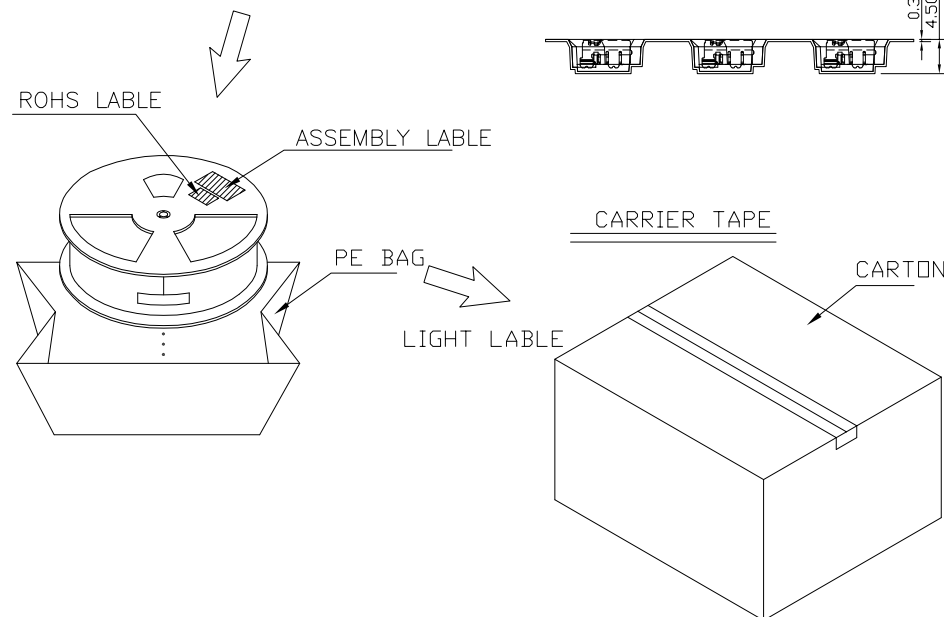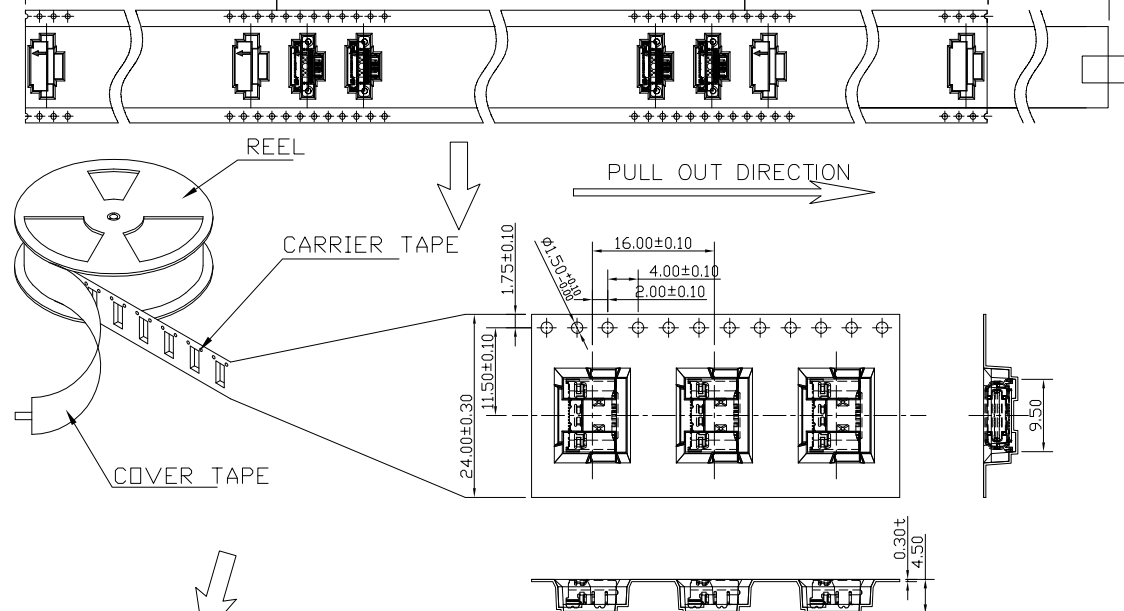

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.50 W=24.0
- 2.3 COVER TAPE: T=0.05 W=25.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1000 PCS/REEL
- 3.2 SECODARY PACKING: 12 REELS/CARTON(12000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US3216AGB0062R
REVIEW TABLE FOR DETAILSQUALITY SYMBOL
= 12
= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)			
X.	±0.25	X.	±4.0°
.X	±0.20	.X	±3.0°
.XX	±0.15	.XX	±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
16 Pin 板上型 TYPE C USB
Customer DrawingECN DESCRIPTION
RELEASE TO TOOLING

DRAWN BY DATE

KATE DENG

CHECKED BY DATE
FAND -----APPROVED BY DATE
Wang Yan -----

DOCUMENT NO.

SHEET NO.

1 OF 1

DIMENSION STYLE
MM ONLYDESIGN UNITS
METRICSCALE
10:1THIRD ANGLE
PROJECTIONframe size: A4
Rev.A 2022.04.09