
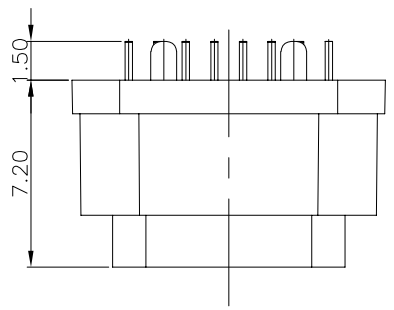


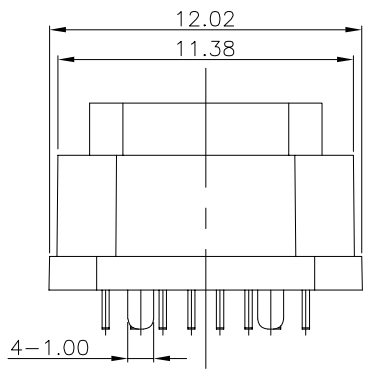

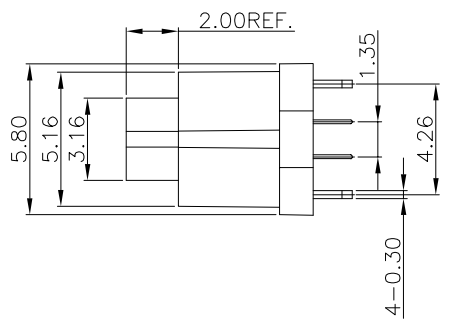


SPECIFICATION:
1、 ELECTRICAL:
1.1 CURRENT RATING:5A;
1.2 CONTACT RESISTANCE:30mΩ Max;
1.3 DIELECTRIC WITHSTANDING VOLTAGE:100V AC;
1.4 INSULATION RESISTANCE:100 MΩ MIN;
2、 MECHANICAL;
2.1 MATING FORCE:5~20N;
2.2 UNMATING FORCE:8~20N;
2.3 DURABILITY:10000 CYCLES;6~20N AFTER DURABILITY TEST;
3、 MATERIAL:
3.1 OUTER COVER: HIGH TEMPERATURE PLASTIC;
3.2 BODY HOUSING:HIGH TEMPERATURE PLASTIC;
3.3 TERMINAL:COPPER ALLOY;
3.4 SHELL:STAINLESS STEEL;
3.5 MID PLATE:STAINLESS STEEL;
4、 PLATING SPECIFICATION:
4.1 TERMINAL:CONTACT AREA GOLD PLATED G/F
PIN WELDING AREA GOLD PLATED G/F
4.2 SHELL:PLATED Ni 30u" MIN
4.3. MID PLATE:CLEAR ONLY
5、 SMT REFLOW SOLDERING (PEAK VALUE 260 °C ± 5 ° C)
SHALL BE FREE OF BLISTERING, GLUE MELTING AND
POOR COLOR CHANGE (DEFORMATION WITHIN TOLERANCE)
6、 OPERATING TEMPERATURE: -40°C~+85°C
7、 WATER PROOFNESS:THIS PRODUCTIS BASED ON IPX8.

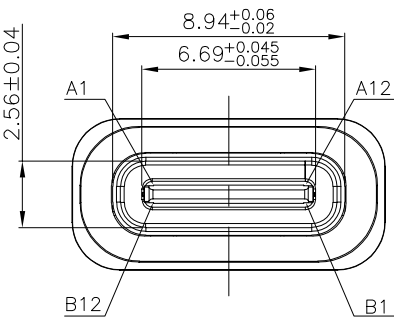


REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	±0.25	MATERIAL	SEE NOTES	
	.X	±0.20		FINISHED	
	.XX	±0.15		APPROCED	
	.XXX	±0.10		CHECKED	
ANGLE	X.	±3.0°	DESIGN	FAND	
	.X	±2.0°		DRAWN	
	.XX	±1.0°		Wang Yan	


杰康富精密电子有限公司	
J K F precision Electronics Co., LTD	
TITLE:	TYPE C 16PIN 直插防水母座 H=7.2mm
PART NO.	JK-US7216AGB00182R
DRAWING NO.	

SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
-------	-----	------	----	-------	--------	------	---





Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D−
A7	D−	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND


Frame_A3
Rev.F2013/09/10

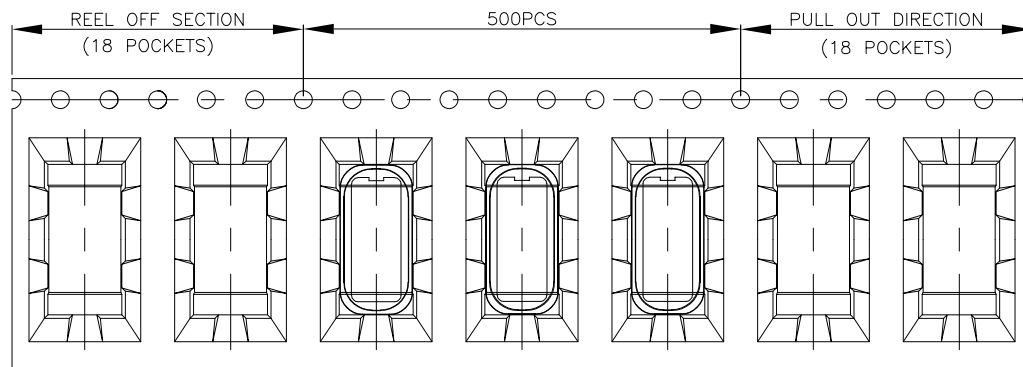


① 产品入载带示意图

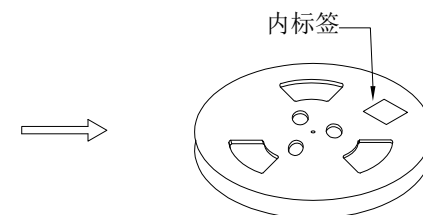


② 卷盘贴标签示意图

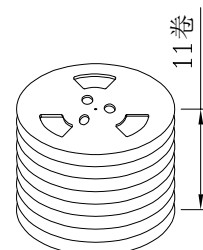

③ 11盘产品叠层示意图

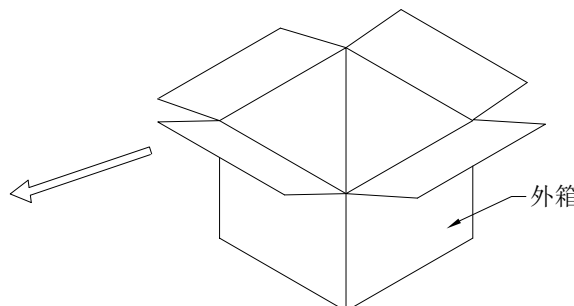


④ 产品入外箱示意图

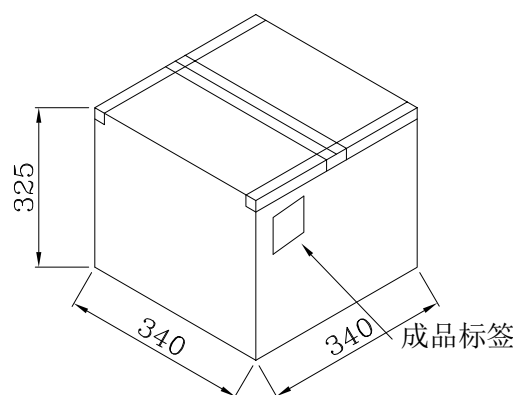

⑤ 外箱封箱示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装500PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每11盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签, 如客户有要求, 请按客户要求包装出货)
6. 载带前面留18PCS空格, 后面留18PCS空格
7. COVER与CARRY剥离力:50-125g, 速度:300mm/分钟左右, 剥离角度:165° -180°

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 J K F precision Electronics Co., LTD							
DISTANCE X.		MATERIAL		SEE NOTES									
X. ±0.25		FINISHED		SEE NOTES		TITLE:		TYPE C 16PIN 直插防水母座 H=7.2mm					
.X ±0.20													
.XX ±0.15		APPROCD	KATE DENG			PART NO.		JK-US7216AGB00182R					
.XXX ±0.10													
ANGLE		CHECKED	KATE DENG			DRAWING NO.							
X. ±3.0°		DESIGN	FAND										
.X ±2.0°		DRAWN	Wang Yan			SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
.XX ±1.0°													

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED