

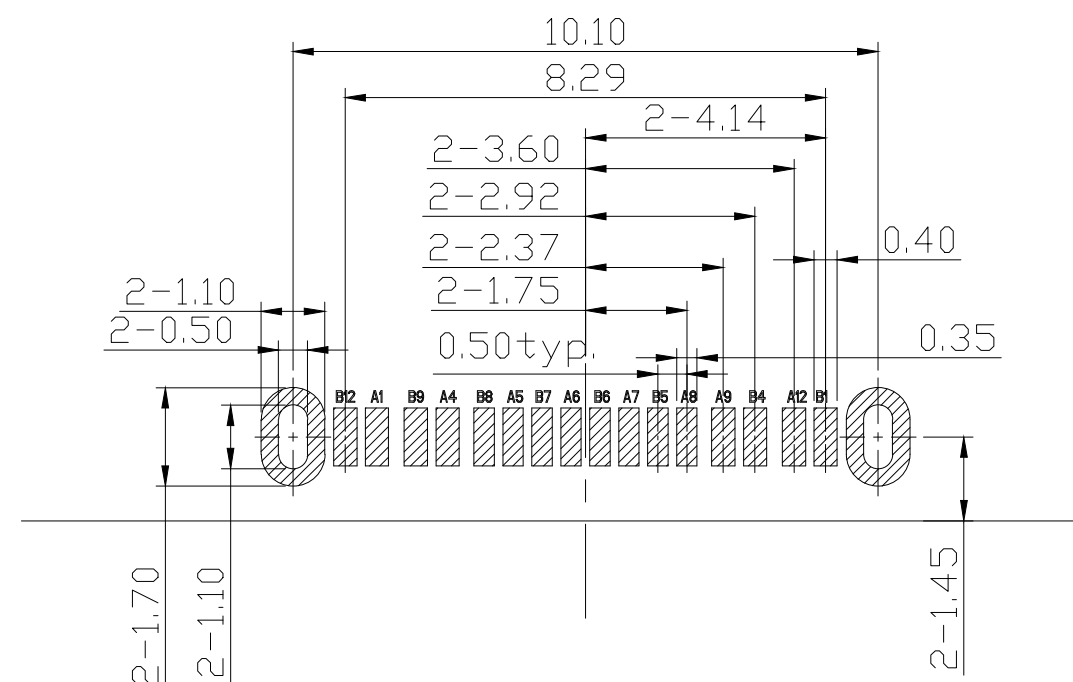
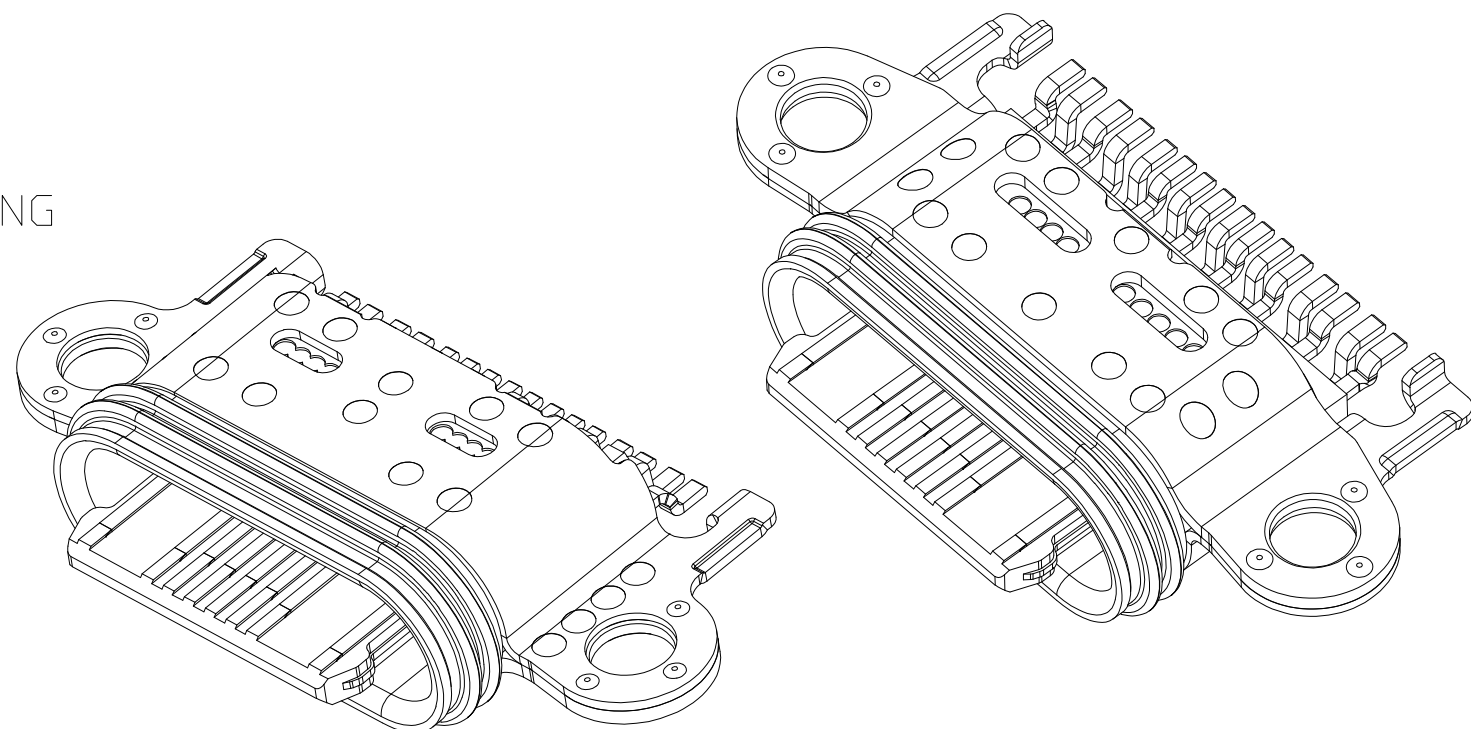


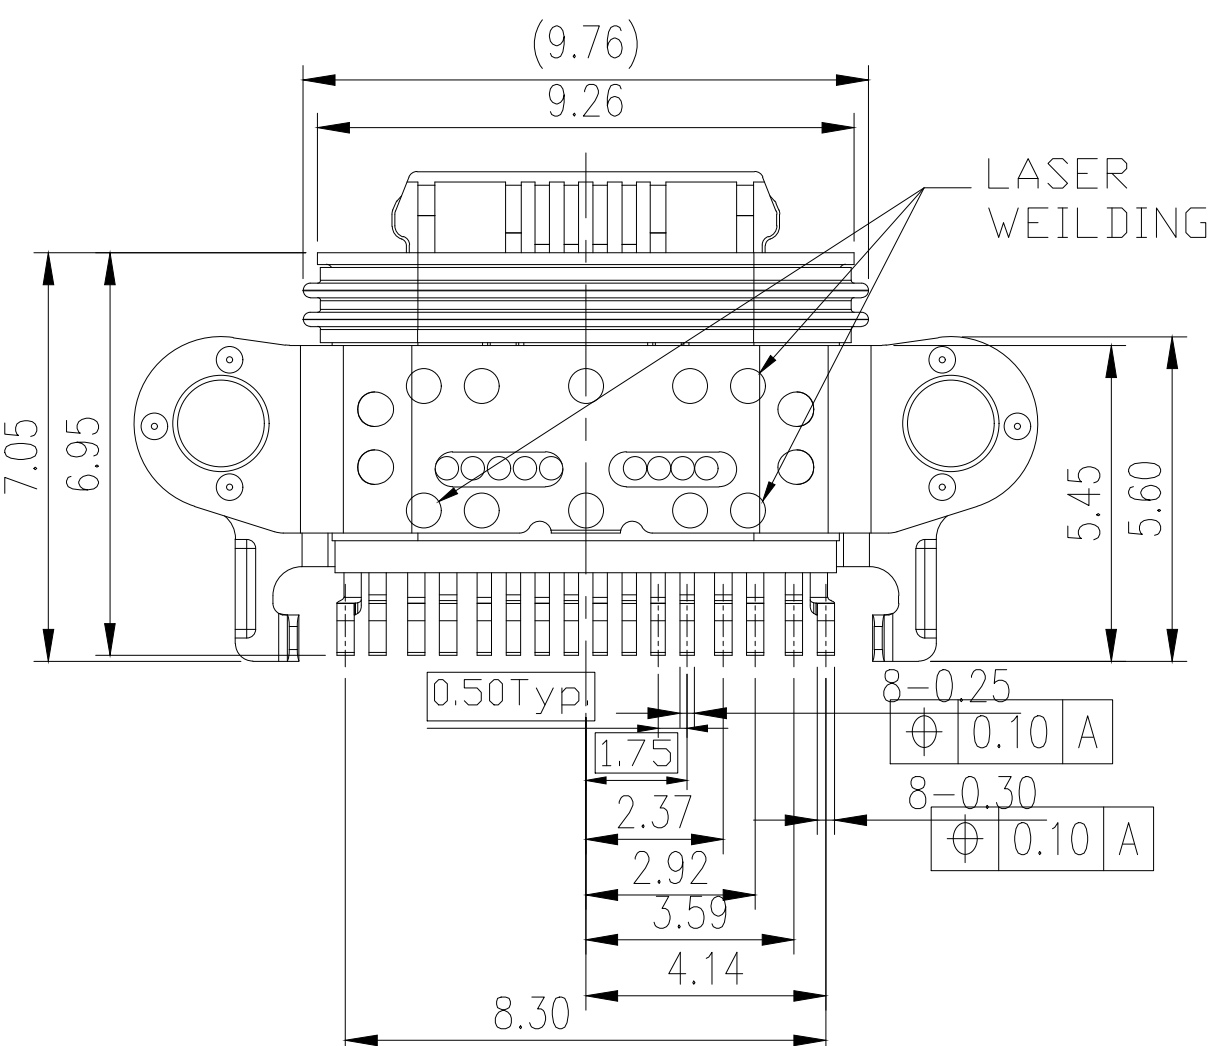

P.C.B LAYOUT VIEW TOLERANCE ± 0.05

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 CURRENT RATING: 6A
 - 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
 - 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.MECHANICAL CHARACTERISTICS
 - 2.1 INSERTION FORCE: 5~20N
 - 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - 2.3 DURABILITY:10,000CYCLES
- 3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

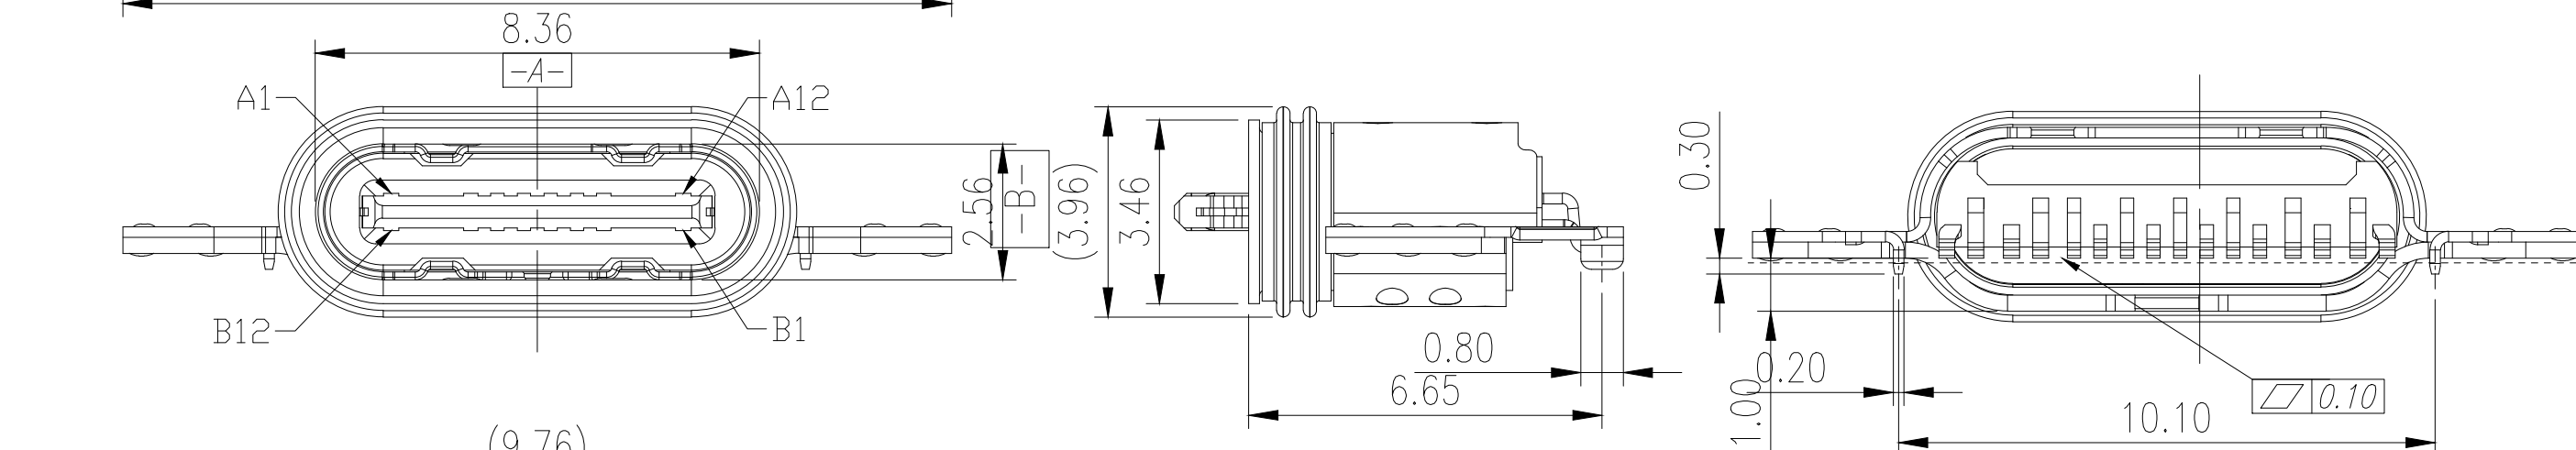

USB TYPE-C PIN ASSIGNMENTS

PIN	NUMBER	SIGNAL NAME	PIN	NUMBER	SIGNAL NAME
	A1	GND		B12	GND
	A4	VBUS		B9	VBUS
	A5	CC1		B8	SBU2
	A6	Dp1		B7	Dn2
	A7	Dn1		B6	Dp2
	A8	SBU1		B5	CC2
	A9	VBUS		B4	VBUS
	A12	GND		B1	GND

4	WATERPROOF RING	1 SET	HIGH TEM.SILICONE	None
3	IN SHELL	1 PCS	STAINLESS STEEL	None
2	MOLDING HOUSING	1 PCS	HIGH TEM. PLASTIC+ COPPER ALLOY +STAINLESS STEEL	Terminal Au& Ni Plated
1	LASER WELDING SHELL	1 PCS	STAINLESS STEEL	Ni & Au Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US2416AGB00115R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL

$$\blacktriangle = 12 \quad \triangle = 0$$

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ± 0.25	X. ± 4.0
.X ± 0.20	.X ± 3.0
.XX ± 0.15	.XX ± 2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F
Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

16 Pin USB Type C 沉板1.2mm 普通不防水



DOCUMENT NO.

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SCALE
10:1



THIRD ANGLE
PROJECTION





frame size: A4
Rev.A 2022.04.09

RoHS
Compliant


REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	


160mmMIN.(15CAV. EMPTY) LOADING 1200PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

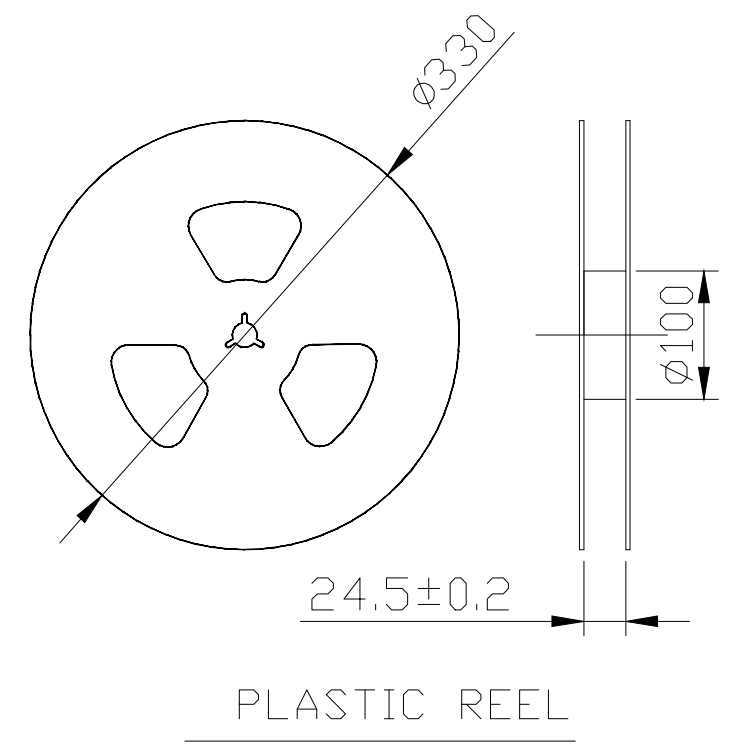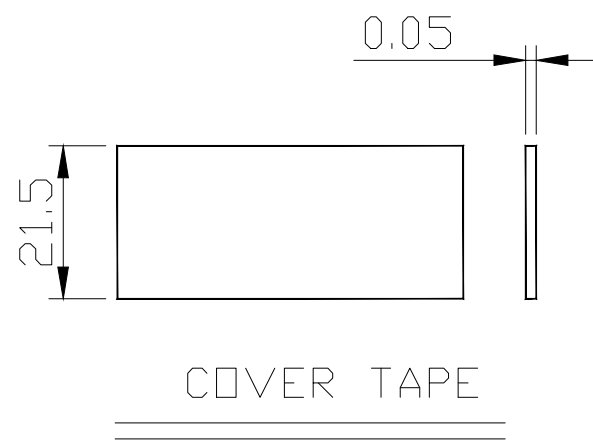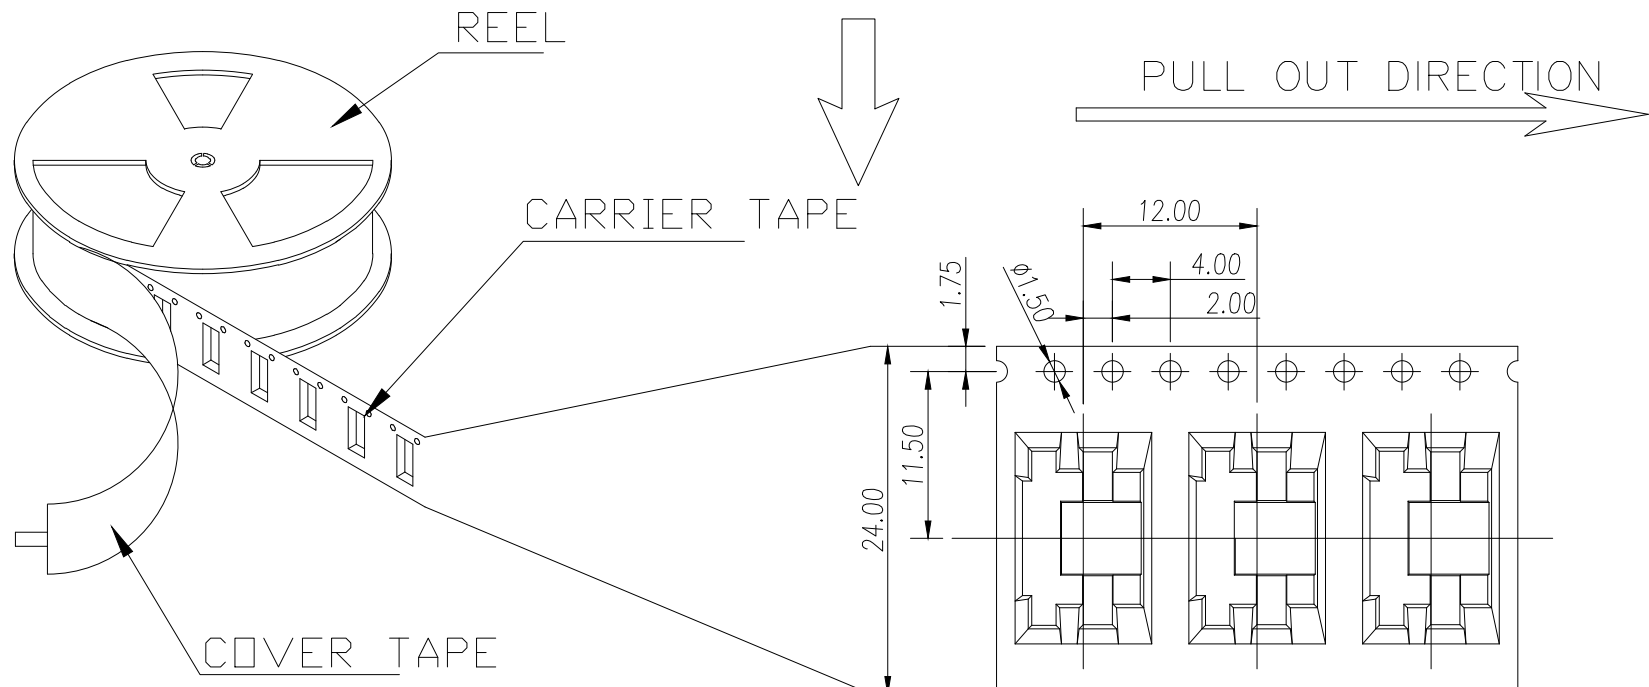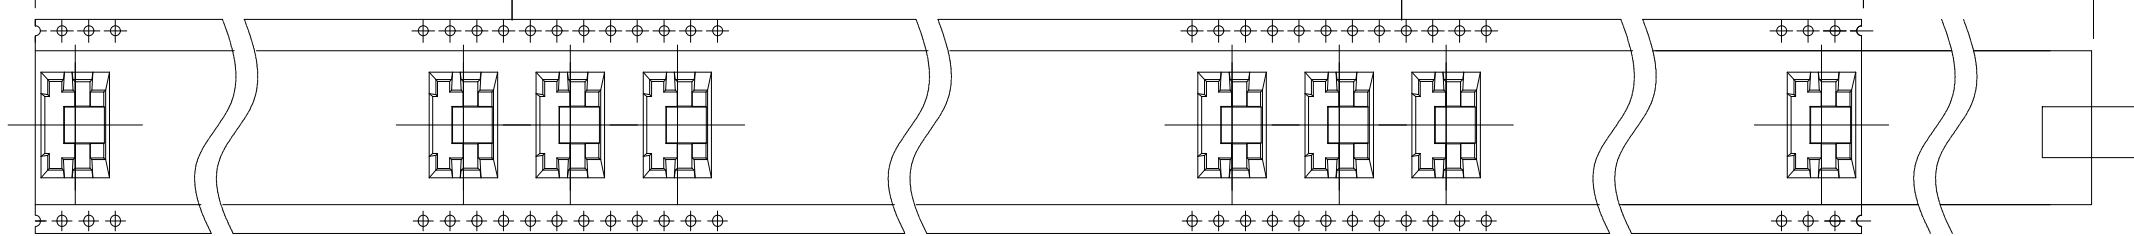

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, ØA=330
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

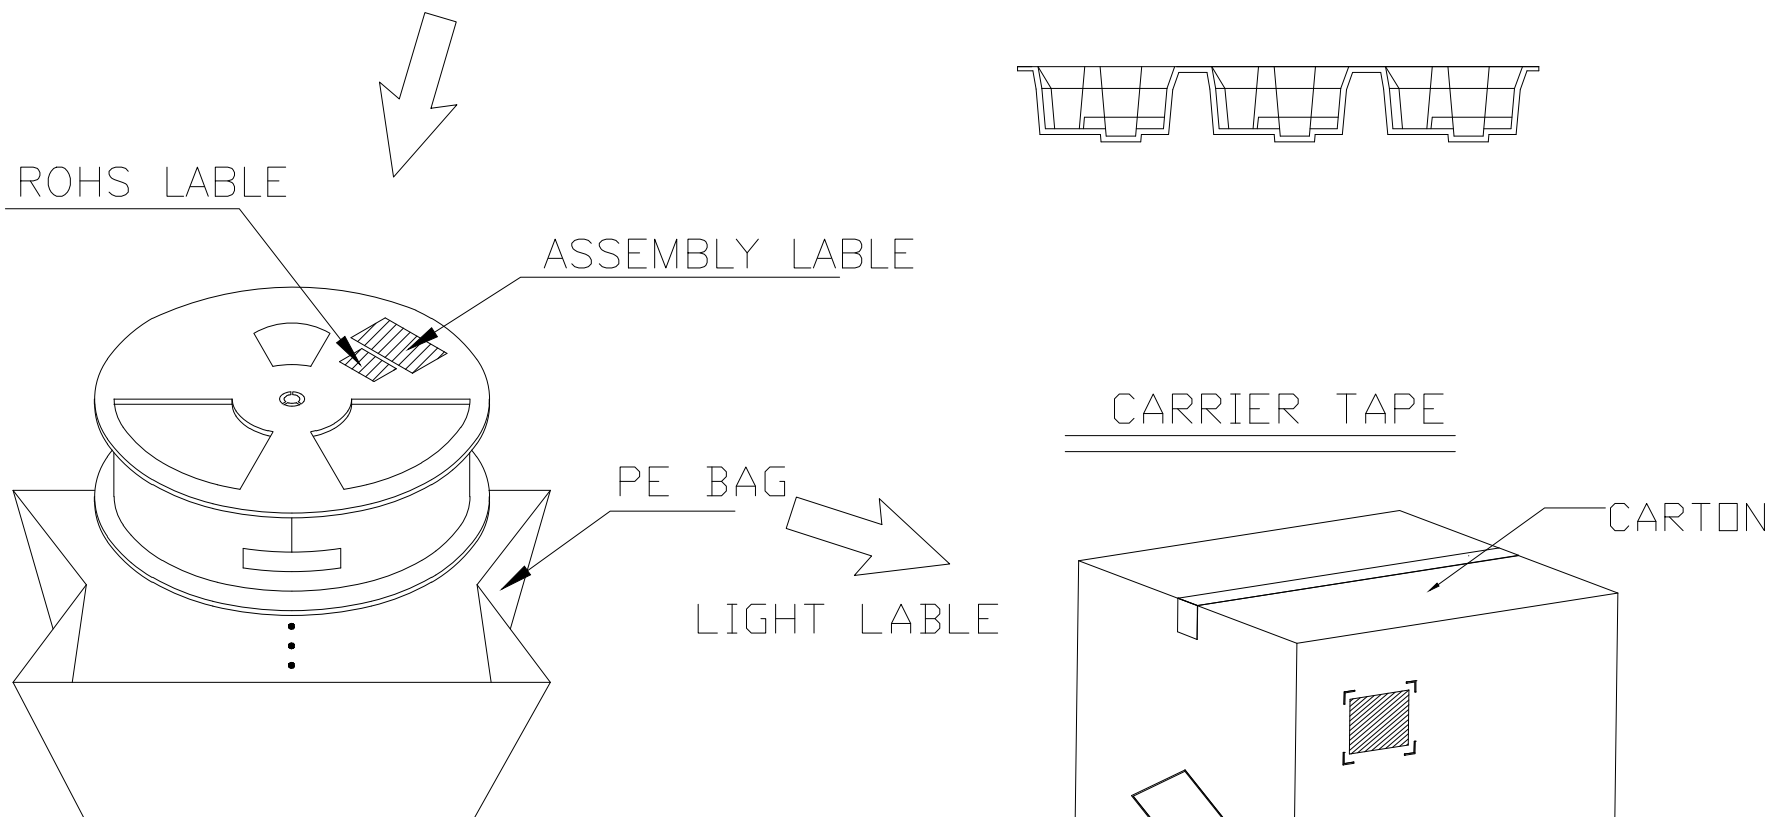

MATERIAL NO.:			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
JK-US2416AGB00115R			TITLE 16 Pin USB Type C 沉板1.2mm 普通不防水			ECN DESCRIPTION RELEASE TO TOOLING								
REVIEW TABLE FOR DETAILS						DRAWN BY KATE DENG			DATE					
QUALITY SYMBOL = 12 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		 J K F Technology Co.,Ltd			CHECKED BY FAND			DATE -----					
	X. ±0.25 X. ±4.0					DOCUMENT NO.			SHEET NO. 1 OF 1			APPROVED BY Wang Yan		
	.X ±0.20 .X ±3.0		DIMENSION STYLE MM ONLY			DESIGN UNITS METRIC			SCALE 10:1			 THIRD ANGLE PROJECTION		
	.XX ±0.15 .XX ±2.0													

frame size: A4
Rev.A 2022.04.09