
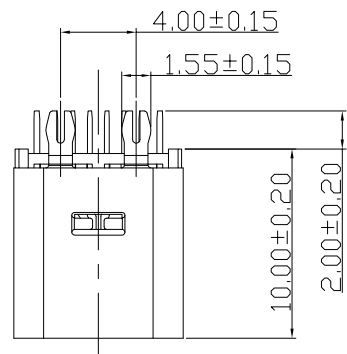
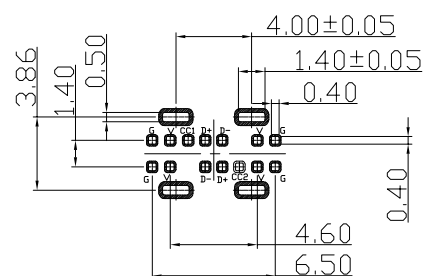





NOTE :
UT03FD014SX01ZA

- 1
1.Seletive Plating
S1:5u" Gold In Contact Area
100u" Tin In Tail Area
S2:0.8u" Gold In Contact Area
100u" Tin In Tail Area
S3:10u" Gold In Contact Area
100u" Tin In Tail Area
S4:15u" Gold In Contact Area
100u" Tin In Tail Area
S5:30u" Gold In Contact Area
100u" Tin In Tail Area

- SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之后)
8. DURABILITY: 10,000 CYCLES



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

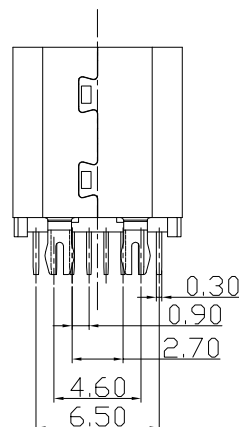

7				
6				
5				
4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	—	NO Plated
2	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

MATERIAL NO.:

JK-US1014AGB0039R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL = 12 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	30~	±0.50
	10~ 30	±0.30
	~ 10	±0.15
	ANGLES	±2°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE TTYE C 2.0母座14PIN 180度插板		ECN DESCRIPTION RELEASE TO TOOLING	
J K F Technology Co.,Ltd		DRAWN BY KATE DENG	DATE -----
		CHECKED BY FAND	DATE -----
DOCUMENT NO.		SHEET NO. 1 OF 1	APPROVED BY Wang Yan
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 10:1	THIRD ANGLE PROJECTION