

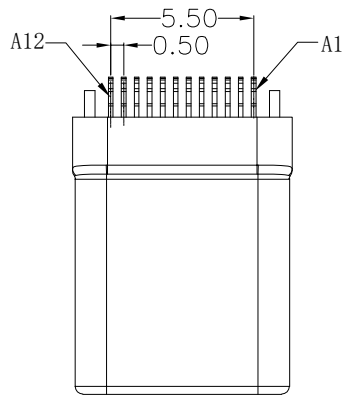
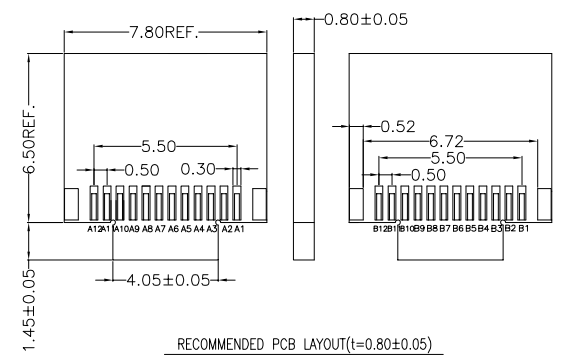




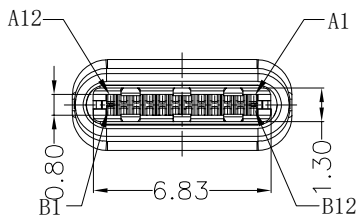

NOTES:


SPECIFICATION:

- 1. CURRENT RATING: 3.0A MAX
- 2. VOLTAGE: 100 VAC
- 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
- 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
- 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 6. LNSERTION FORCE : 5N~20N
- 7. UNMATING FORCE: 8N~20N
- 8. DURABILITY: 10,000 CYCLES

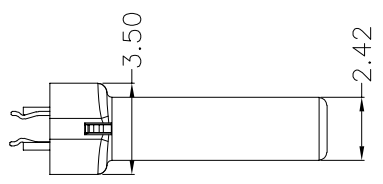

RECOMMENDED PCB LAYOUT($t=0.80\pm0.05$)
COMPONENT SIDE(GENERAL TOLERANCE: ±0.05)

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

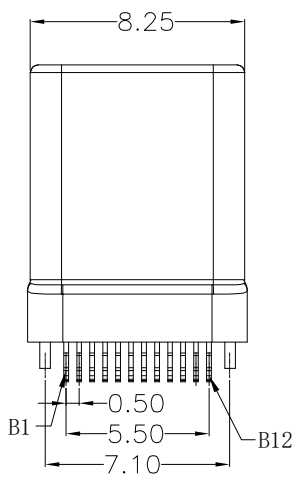

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	LATCH	STAINLESS STEEL	TIN/NI Plated	1PCS
2	CONTACT	PHOSPHOR COPPER	GOLD FLASH/AU/NI Plated	1SET
1	HOUSING	High temperature plastic	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 J K F precision Electronics Co., LTD							
DISTANCE X.		MATERIAL		SEE NOTES		TITLE:		USB C TYPE 夹板插端式3.5-拉伸壳					
X. ±0.25		FINISHED		SEE NOTES									
.X ±0.20													
.XX ±0.15		APPROCED		KATE DENG									
.XXX ±0.10		CHECKED		KATE DENG		PART NO.		JK-US1024AGB001R					
ANGLE		DESIGN		FAND		DRAWING NO.		014001020-032					
X. ±3.0°													
.X ±2.0°		DRAWN		Wang Yan		SCALE 1:1		SIZE	A3	SHEET	1 OF 1	REV.	A
.XX ±1.0°													