
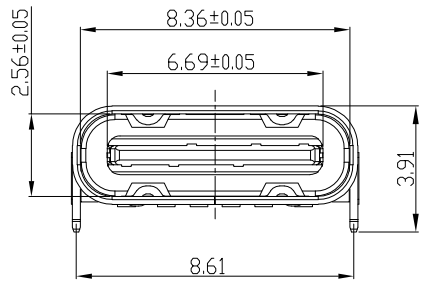
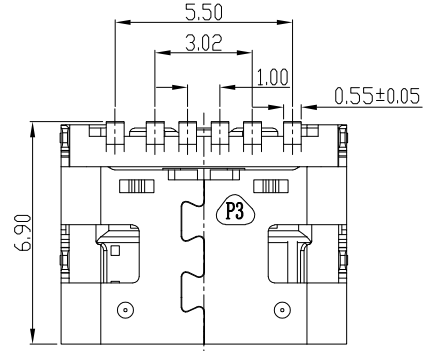
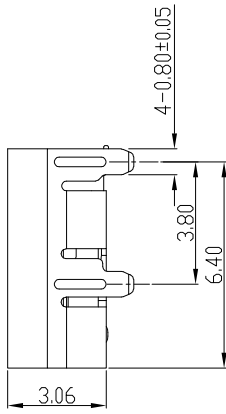
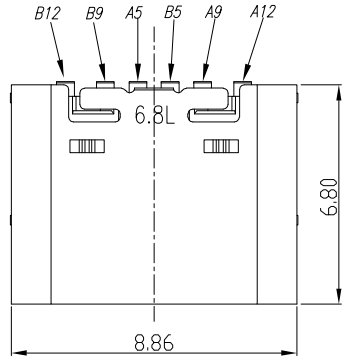



0.10

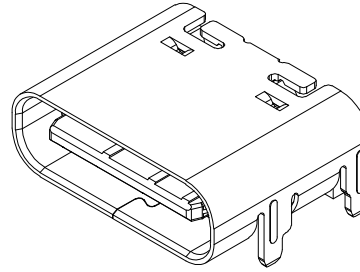

A1		B12	GND
A4		B9	VBUS
A5	CC1	B8	
A6		B7	
A7		B6	
A8		B5	CC2
A9	VBUS	B4	
A12	GND	B1	
PIN	SIGNAL NAME	PIN	SIGNAL NAME

备注:
1. 材质:
1.1 胶芯: LCP UL94V-0
1.2 端子: C2680-H, T=0.15mm; 镍底40U" MIN,
接触区域镀金 (AU 1u") 焊接区镀金G/F
1.3 外壳: SUS201/SPCC, T=0.25mm; 表面镀镍40U" MIN;

2. 主要特性:
2.1 额定电流: 3.0A
2.2 接触阻抗: 40mΩ MAX (初始值)
50mΩ MAX (测试后)
2.3 绝缘阻抗: 100MΩ MIN
2.4 耐压测试: 100V AC R.M.S.
2.6 整体插入力: 5-20N 整体插入力: 5-20N (耐久后)
整体拔出: 8-20N 整体拔出: 6-20N (耐久后)
2.7 耐久: 3000次
2.8 耐高温: SMT回流焊 (峰值260° ±5°), 塑胶不能有起泡,
融胶等不良, 变色, 翘曲变形在公差范围以内;
2.9 产品须做焊锡测试, 粘锡面积达到95%以上;
3.0 盐雾测试: 24H MIN
3.1 工作温度: -30℃~+85℃

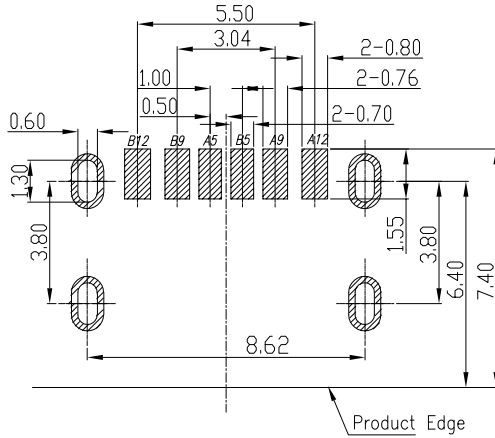


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

P3	20240822001	增加外壳下脚卡点	RYC	2024.08.22
P2	20240428001	增加字码, 方便区分	LLB	2024.04.28
P1		NEW		2023.06.13


MATERIAL NO.:	
JK-US3206AGB009R-2	
REVIEW TABLE FOR DETAILS	
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)
	X. ±0.25 X. ±4.0°
	.X ±0.20 .X ±3.0°
	.XX ±0.15 .XX ±2.0°
	DISTANCE ANGLE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
6 Pin USB Type C On Board 6.80L		RELEASE TO TOOLING	
1 * Molding		DRAWN BY	DATE
		KATE DENG	
		CHECKED BY	DATE
		FAND	----
DOCUMENT NO.		APPROVED BY	DATE
		Wang Yan	----
SHEET NO.		THIRD ANGLE PROJECTION	
3 OF 1			
DIMENSION STYLE		DESIGN UNITS	SCALE
MM ONLY		METRIC	10:1

frame size: A4
Rev.A 2022.04.09

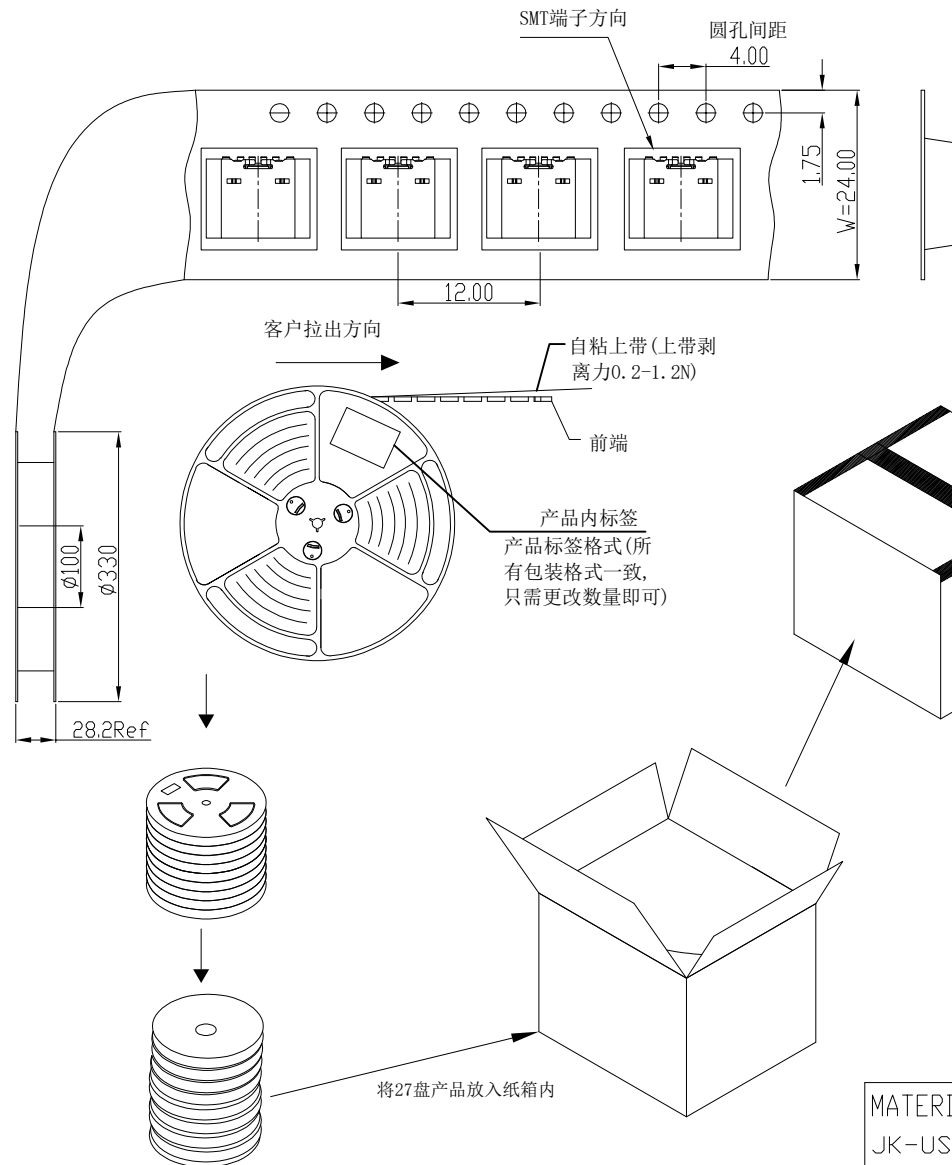

包装示意图:

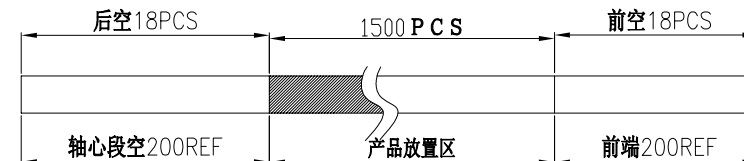

备注:

- 1.把上下载带送入载带机进行调整,然后将产品按照指定的方式摆入下载带中,开动卷带机进行卷装(每卷包1500PCS),卷装完成后需用上带缠绕最少20CM;
- 2.在卷装OK的每卷盘面的指定位置上贴上物料和RoHS标签装入纸箱内;每箱装27盘
- 3.纸箱用封箱带将其封好,胶带要求工字型,不可遮住标签;
- 4.如果客户对包装标签另有要求,请按客户要求作业;有未满足之零数箱需用缓冲材料填充;
- 5.上载带剥离力0.2-1.2N.;

将27盘产品放入纸箱内

P3	20240822001	增加外壳下脚卡点	RYC	2024.08.22
P2	20240428001	增加字码,方便区分	LLB	2024.04.28
P1		NEW		2023.0613

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
JK-US3206AGB009R-2		TITLE		ECN DESCRIPTION
REVIEW TABLE FOR DETAILS		6 Pin USB Type C On Board 6.80L 1 * Molding		RELEASE TO TOOLING
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY	DATE
	X. ±0.25 X. ±4.0		KATE DENG	
	.X ±0.20 .X ±3.0		CHECKED BY	DATE
	.XX ±0.15 .XX ±2.0		FAND	----
DISTANCE		ANGLE	APPROVED BY	DATE
			Wang Yan	----
DIMENSION STYLE		DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY		METRIC	10:1	