

10

9

8

7

6

5

4

3

2

1


RoHS
Compliant

REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	




NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

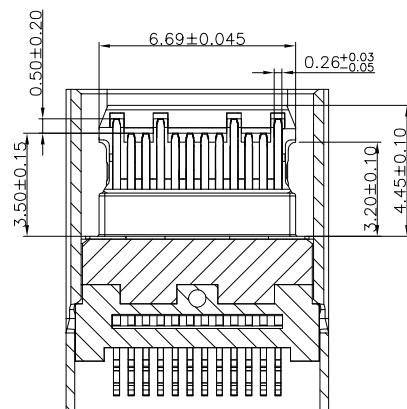


SECTION B-B

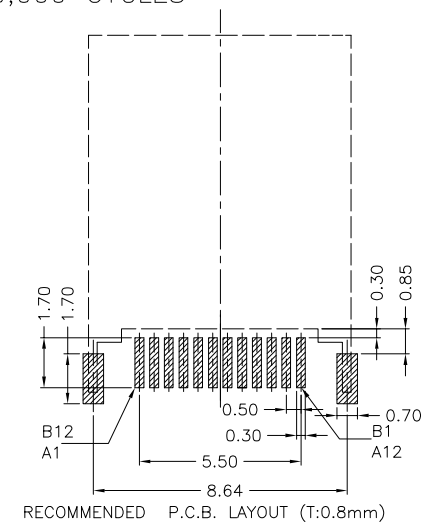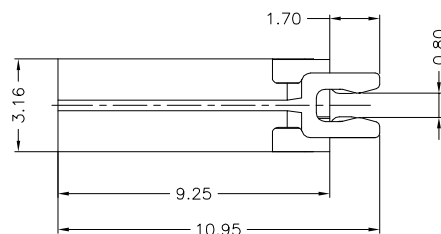

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)

TOLERANCE UNSPECIFIED ±0.05mm

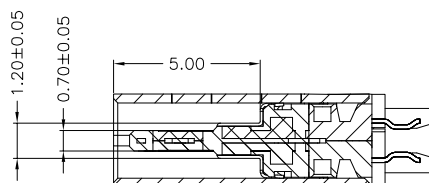

SECTION A-A

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1SET
3	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MATERIAL NO.:

JK-US9324AGB0031R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
= 0GENERAL TOLERANCES
(UNLESS SPECIFIED)

X.X ±0.30	X.* ± 2°
.XX ±0.20	.X* ± 1°
.XXX±0.10	.XX*±0.5°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

C F 24P夹板式0.8短体9.3 CONN.

J K F Technology Co.,Ltd

DOCUMENT NO.

DIMENSION STYLE

MM ONLY

DESIGN UNITS

METRIC

SHEET NO.

1 OF 1

SCALE

10:1

ECN DESCRIPTION

RELEASE TO TOOLING

DRAWN BY DATE

KATE DENG

CHECKED BY DATE

FAND

APPROVED BY DATE

Wang Yan

THIRD ANGLE
PROJECTIONframe size: A4
Rev.A 2022.04.09