


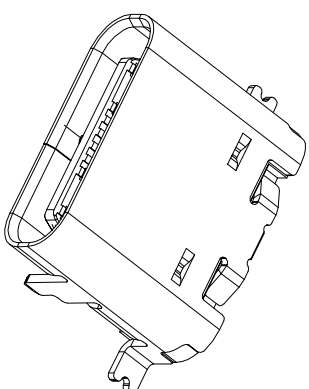

1. ELECTRICAL CHARACTERISTICS:

1. ELECTRICAL CHARACTERISTICS:

1.1 CURRENT RATING: 3A

1.2 TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.

1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s



1.3 INSULATION RESISTANCE:

2.1 MECHANICAL CHARACTERISTICS

2.2 EXTRACTION FORCE: Initial: 8~20N AFTER TEST 6~20N

2.3 DURABILITY: 10,000 CYCLES

3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

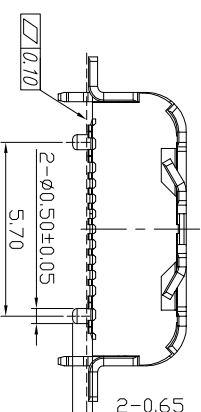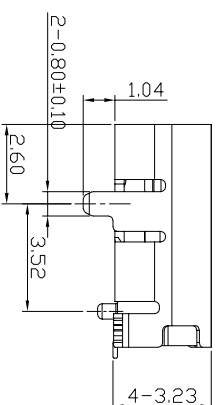

4	OUT_SHELL	1 PCS	STAINLESS STEEL	Ni Plated
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None

MATERIAL NO.:

JK-US3216AGB0074R
REVIEW TABLE FOR DETAILS

TITLE	DESCRIPTION	DATE	BY
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co., Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	RELEASE TO TOOLING		
16 Pin USB Type C On Board 3.25H			

Dip+SMT Customer Drawing

DRAWN BY	DATE

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ± 0.25	X. $\pm 4.0^\circ$

JKF J K F Technology Co., Ltd.
connectivity

CHECKED BY	DATE
FAND	---

QUALITY	
▼ = 12	
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	

10

9

7

၈

၆

4





3

01

frame size: A4
Rev.A 2022.04.09

REV	ECN No.	DATE	REMARK
△	最終仕様	2022.04.09	



160mmMIN.(15CAV. EMPTY) LOADING 1000PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACKAGE SECTION LEADER SECTION COVER TAPE

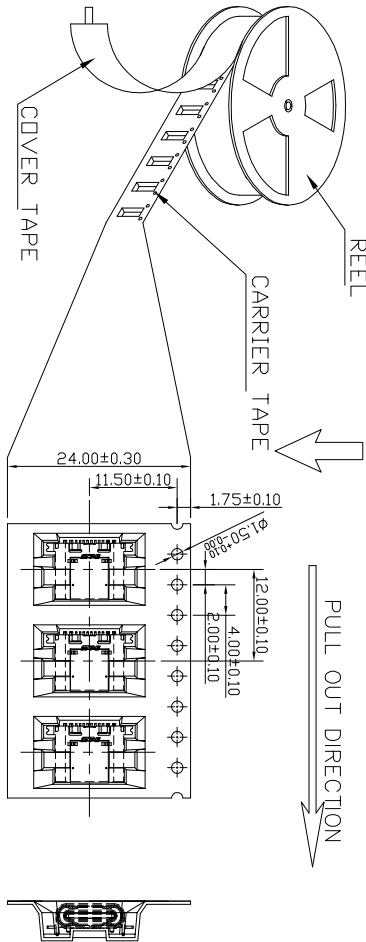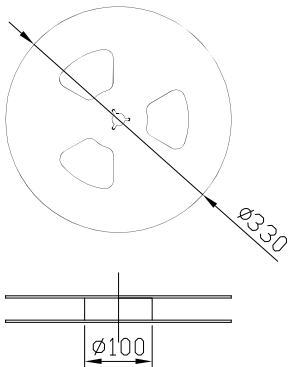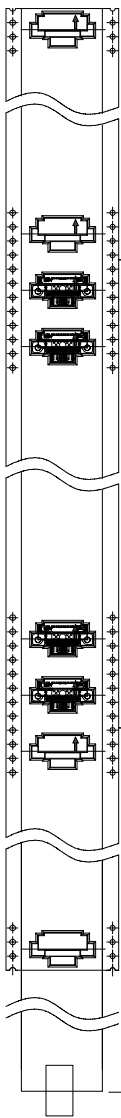

ROHS LABEL

ASSEMBLY LABEL

CARRIER TAPE

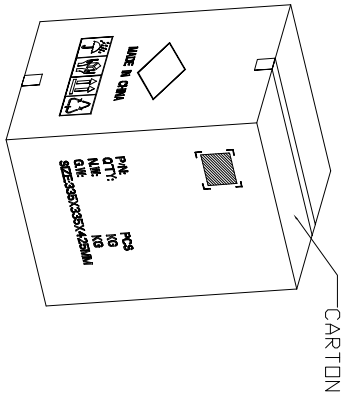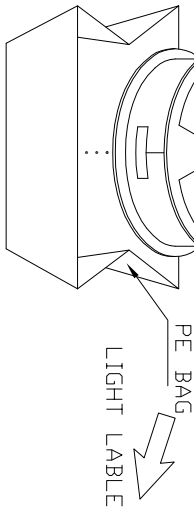

- NOTES 2:
1. MATERIAL:
- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION:
- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
3. QUANTITY :
- 3.1 PRIMARY PACKING: 1000PCS/REEL
- 3.2 SECONDARY PACKING: 12 REELS/CARTON(12000PCS/CARTON)
4. PEELING RESISTANCE: 0.1~1.3N
- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US3216AGB0074R

REVIEW TABLE FOR DETAILS

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X. ± 0.25 X. ± 4.0

.X ± 0.20 .X ± 3.0

.XX ± 0.15 .XX ± 2.0

QUALITY SYMBOL
= 12

TITLE: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

16 Pin USB Type C On Board 3.23H

Dip+SMT Customer Drawing

JKF J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO. 1 OF 1

DIMENSION STYLE MM ONLY

DESIGN UNITS METRIC

SCALE 10:1

THIRD ANGLE PROJECTION

ECN DESCRIPTION

RELEASE TO TOOLING

DRAWN BY KATE DENG

CHECKED BY FAND

APPROVED BY Wang Yon

A

B

C

D

E

F

A

B

C

D

E

F