
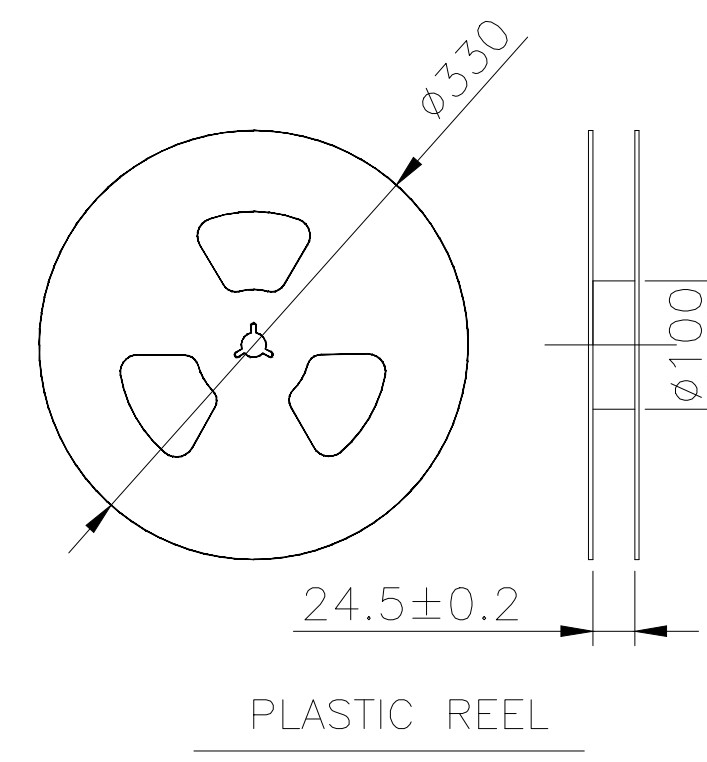
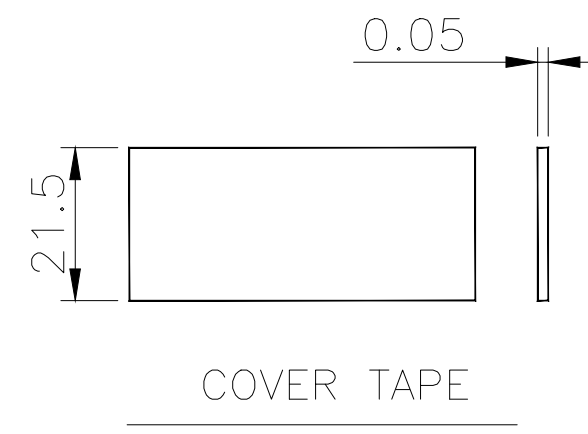
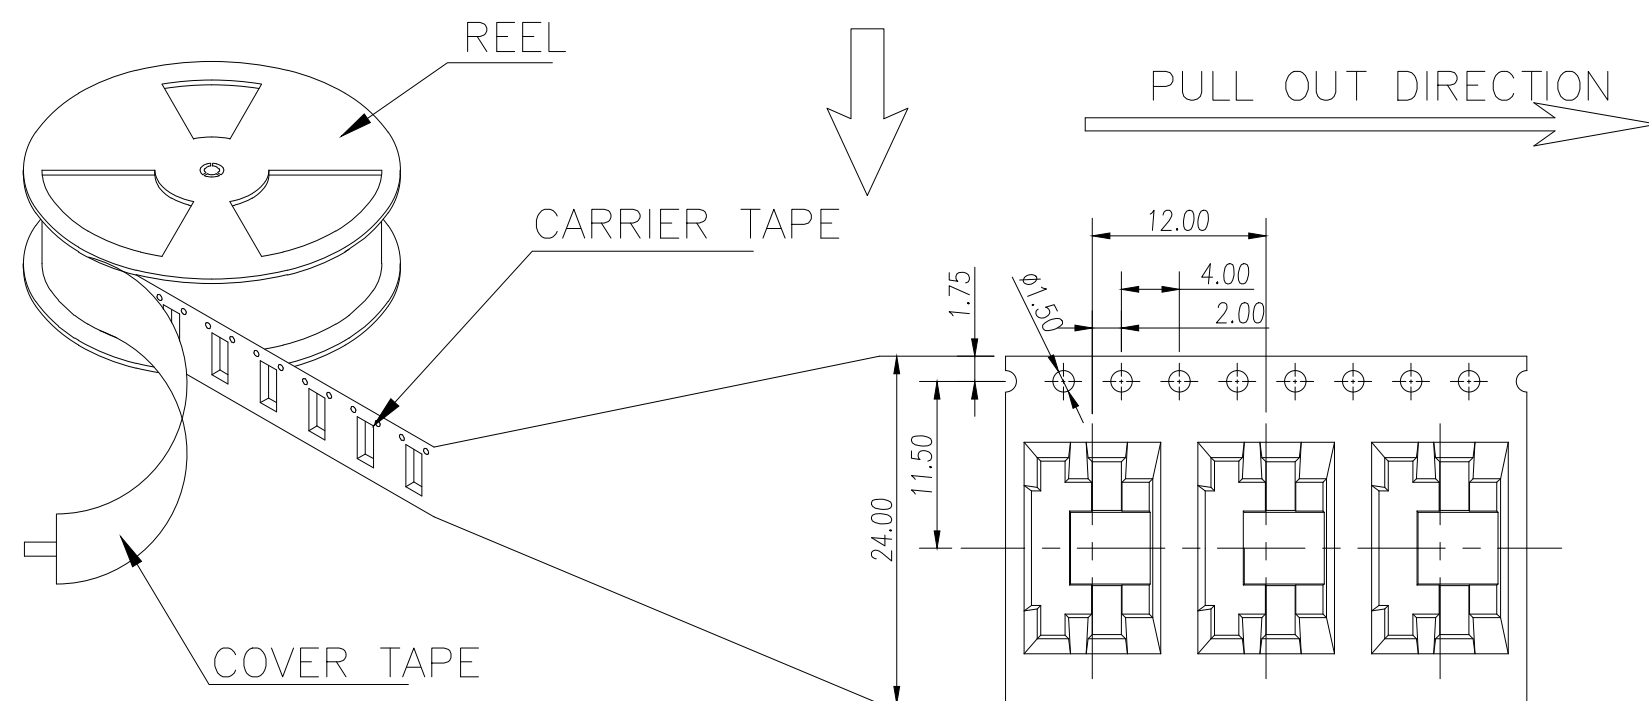


RoHS
Compliant



REV	ECN No.	DATE	REMARK
	????	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1500PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

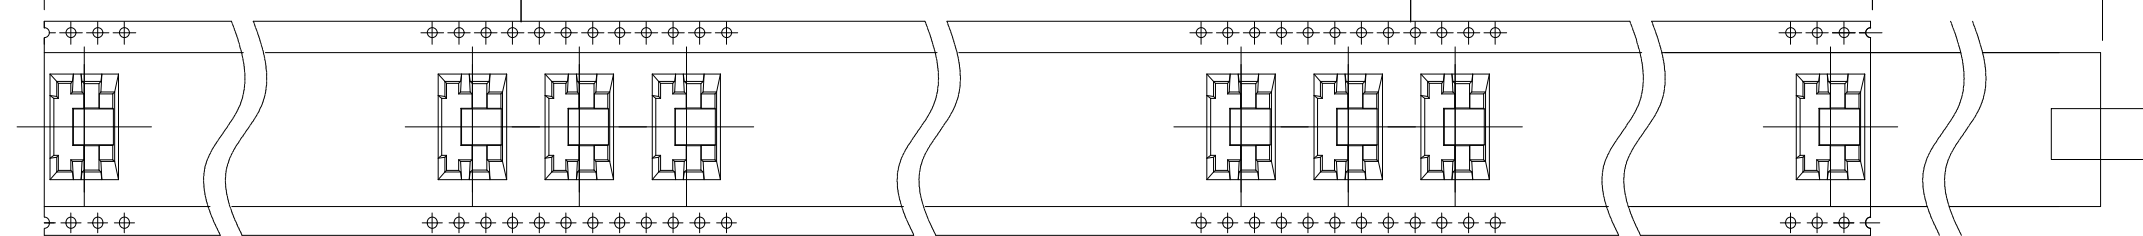

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

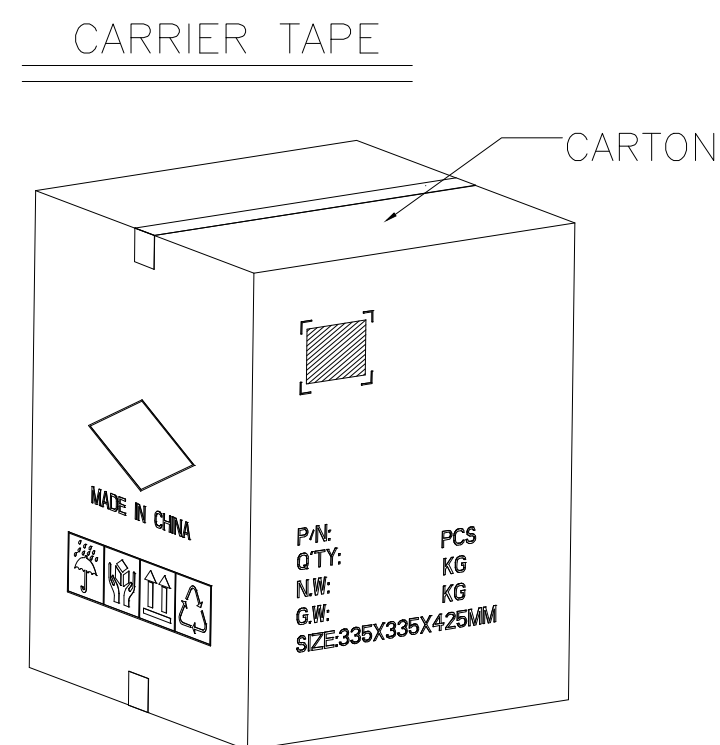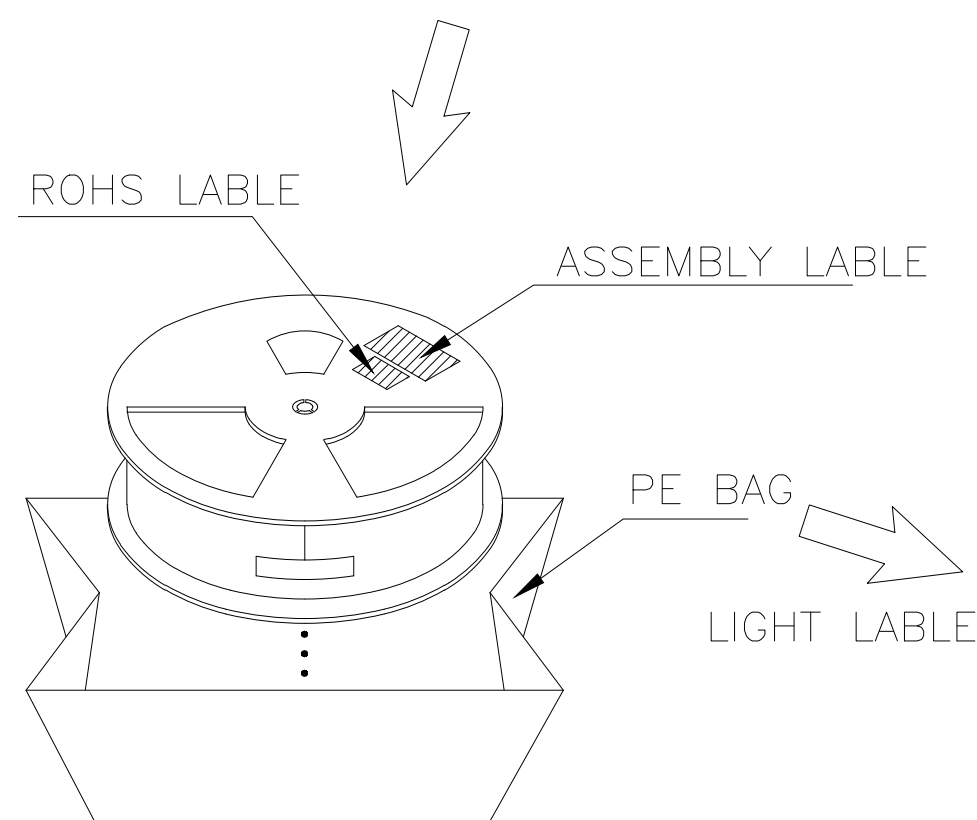

MATERIAL NO.:			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
JK-US3416AGB00130R			TITLE 16 Pin USB Type C 沉板1.60 外壳4.45L			ECN DESCRIPTION		
REVIEW TABLE FOR DETAILS						RELEASE TO TOOLING		
QUALITY SYMBOL = 12 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		 J K F Technology Co.,Ltd			DRAWN BY		DATE
						KATE DENG		
	X. ± 0.25		X. ± 4.0		CHECKED BY		DATE	
	.X ± 0.20		.X ± 3.0		FAND		----	
	.XX ± 0.15		.XX ± 2.0		APPROVED BY		DATE	
					Wang Yan		-----	
				DOCUMENT NO.		SHEET NO.		
						1 OF 1		
				DIMENSION STYLE		DESIGN UNITS		SCALE
				MM ONLY		METRIC		10:1
								 THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09