

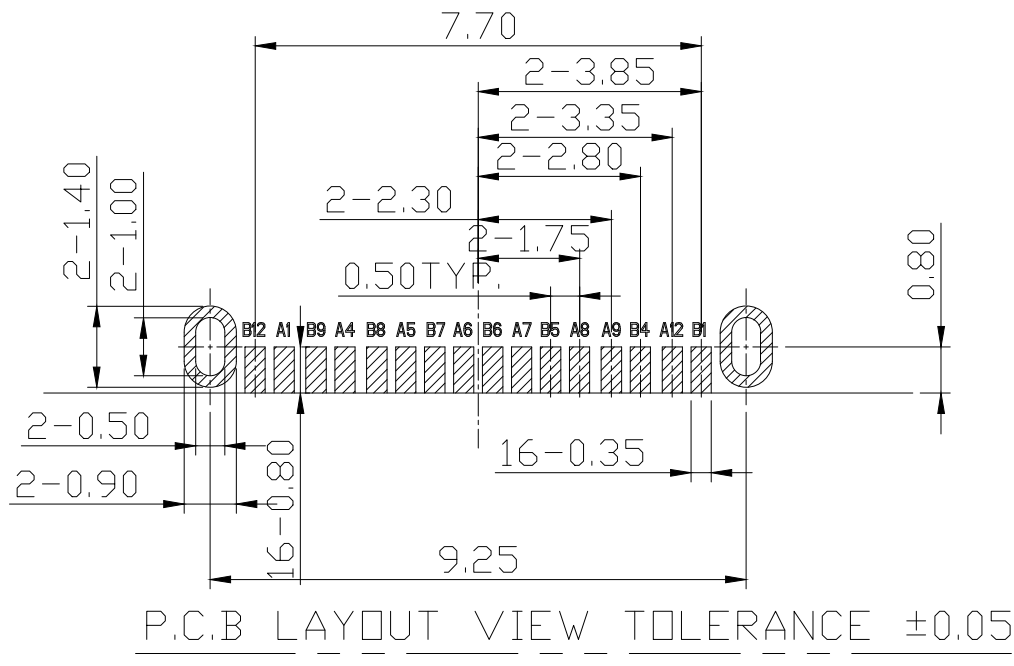


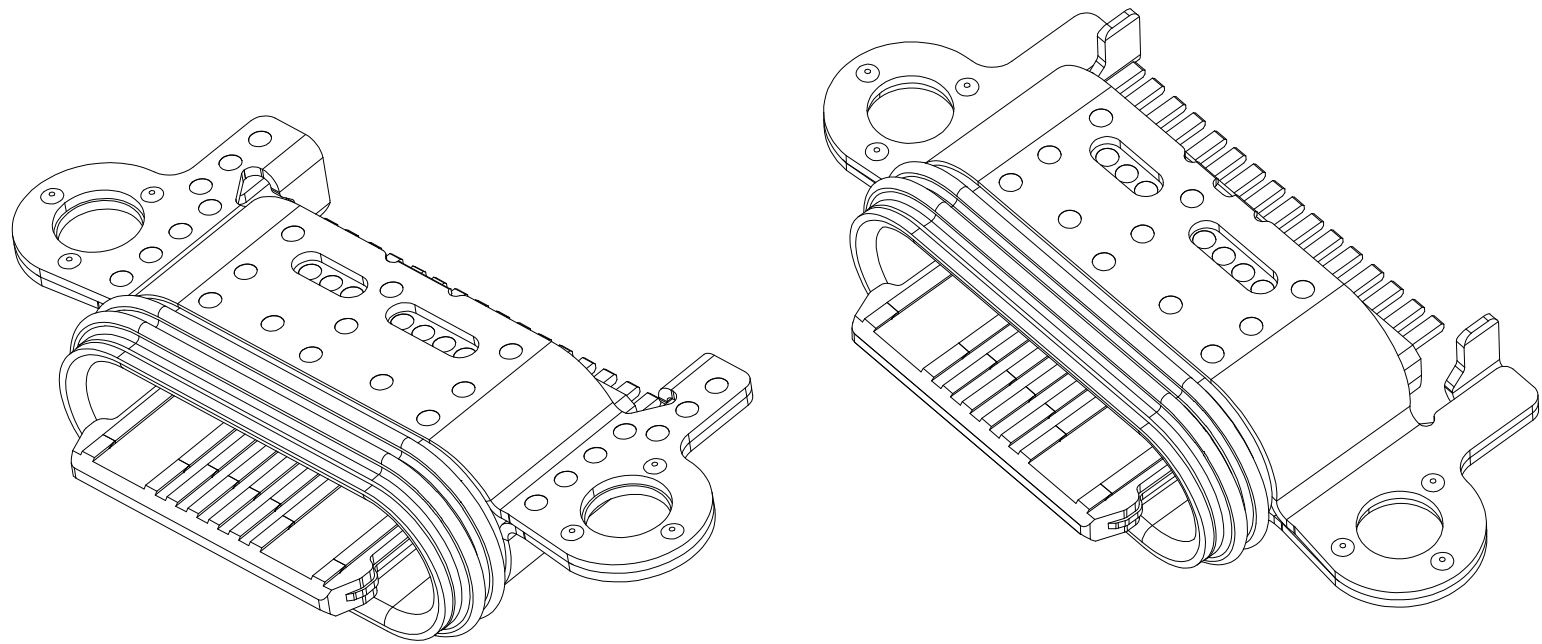

REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

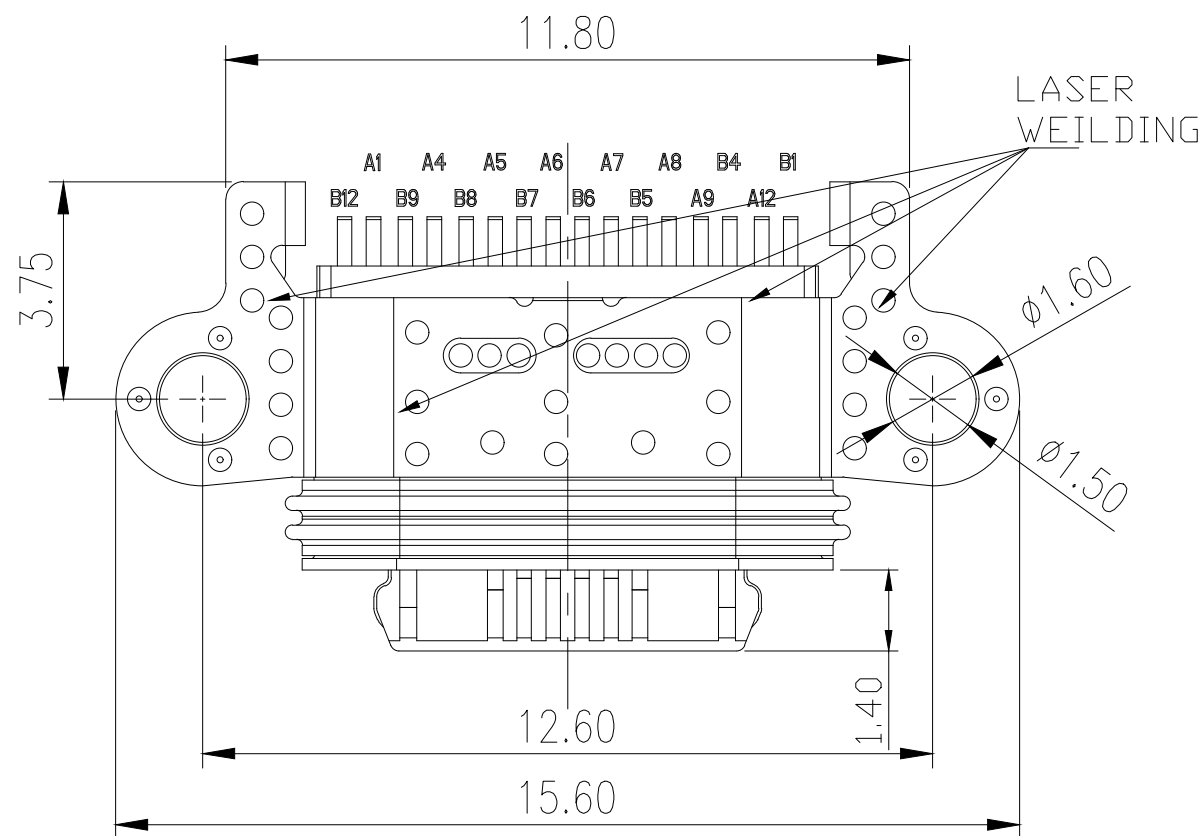

SPECIFICATION:




1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 6A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CONNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

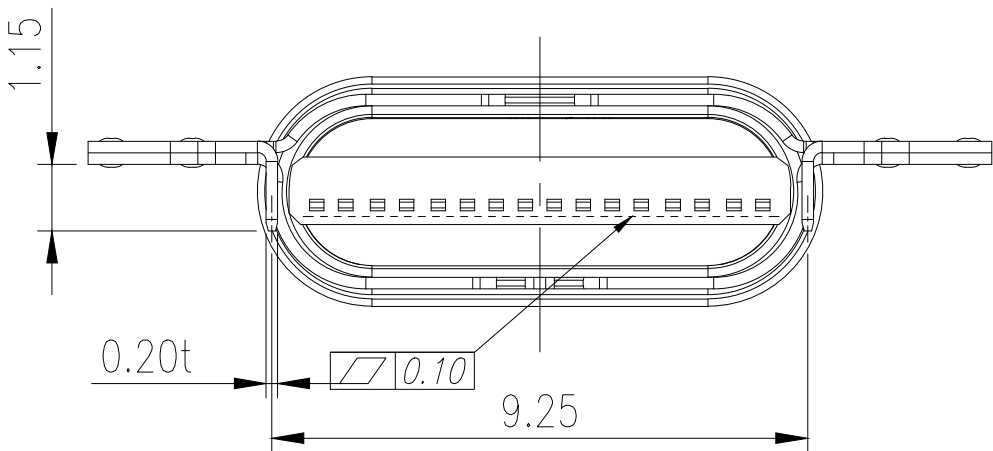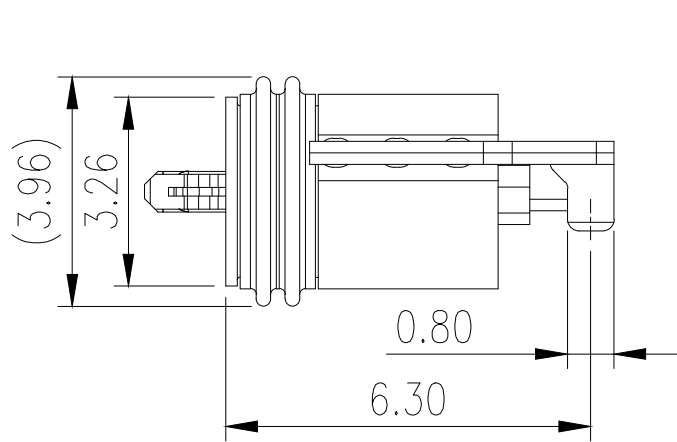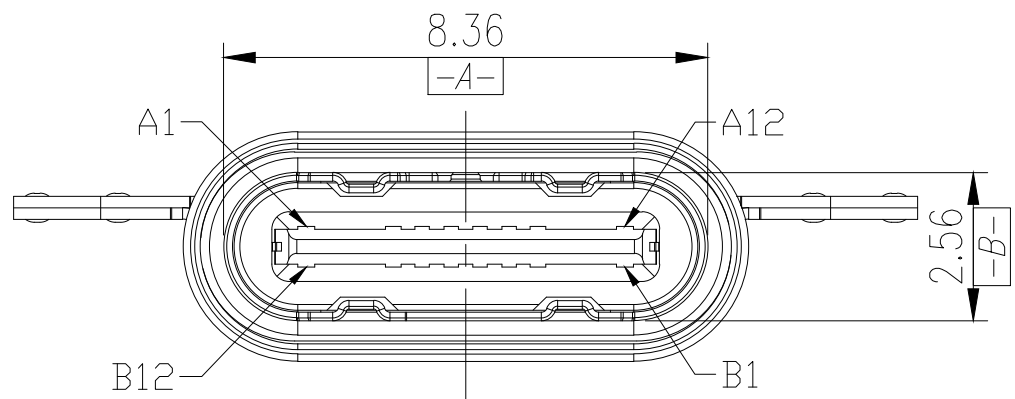

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME
A1	GND
A4	VBUS
A5	CC1
A6	Dp1
A7	Dn1
A8	SBU1
A9	VBUS
A12	GND

PIN NUMBER	SIGNAL NAME
B12	GND
B9	VBUS
B8	SBU2
B7	Dn2
B6	Dp2
B5	CC2
B4	VBUS
B1	GND

NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED
4	WATERPROOF RING	1 SET	HIGH TEM.SILICONE	None
3	IN SHELL	1 PCS	STAINLESS STEEL	None
2	MOLDING HOUSING	1 PCS	HIGH TEM. PLASTIC+ COPPER ALLOY +STAINLESS STEEL	Terminal Au& Ni Plated
1	LASER WELDING SHELL	1 PCS	STAINLESS STEEL	Ni & Au Plated

MATERIAL NO.:

JK-US2016AGB0076R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL

= 12

GENERAL TOLERANCES (UNLESS SPECIFIED)

X. ±0.25

X. ±4.0

.X ±0.20

.X ±3.0

.XX ±0.15

.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE	ECN DESCRIPTION
16 Pin USB Type C 沉板1.35mm IPX8 Customer Drawing	RELEASE TO TOOLING
J K F Technology Co.,Ltd	DRAWN BY KATE DENG DATE
DOCUMENT NO.	CHECKED BY FAND DATE
SHEET NO. 1 OF 1	APPROVED BY Wang Yan DATE
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC
SCALE 10:1	THIRD ANGLE PROJECTION





frame size: A4
Rev.A 2022.04.09

RoHS
Compliant


REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1200PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

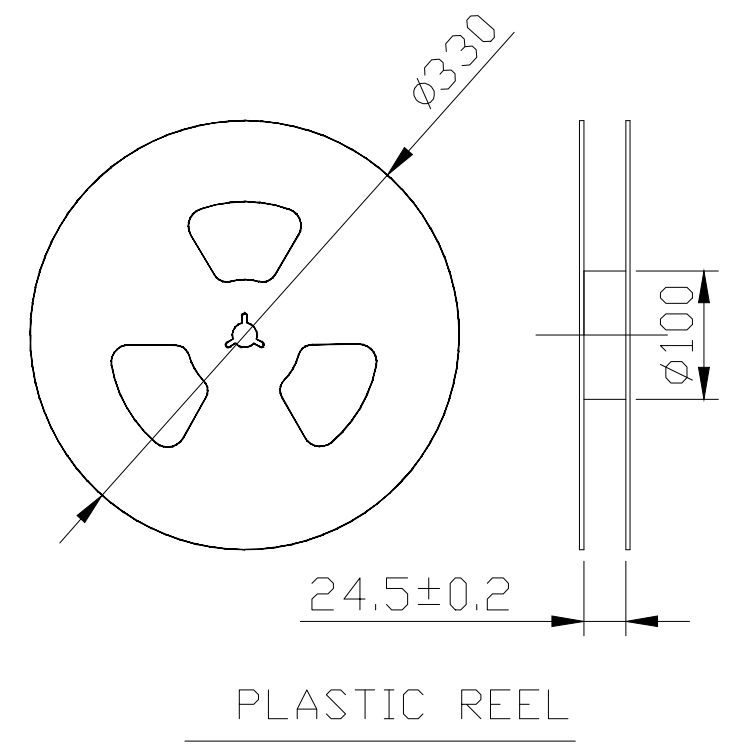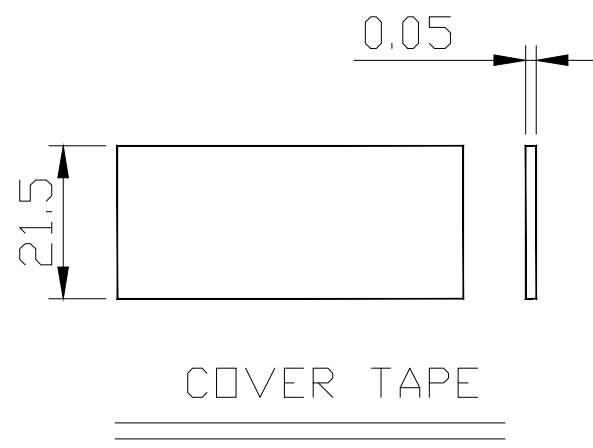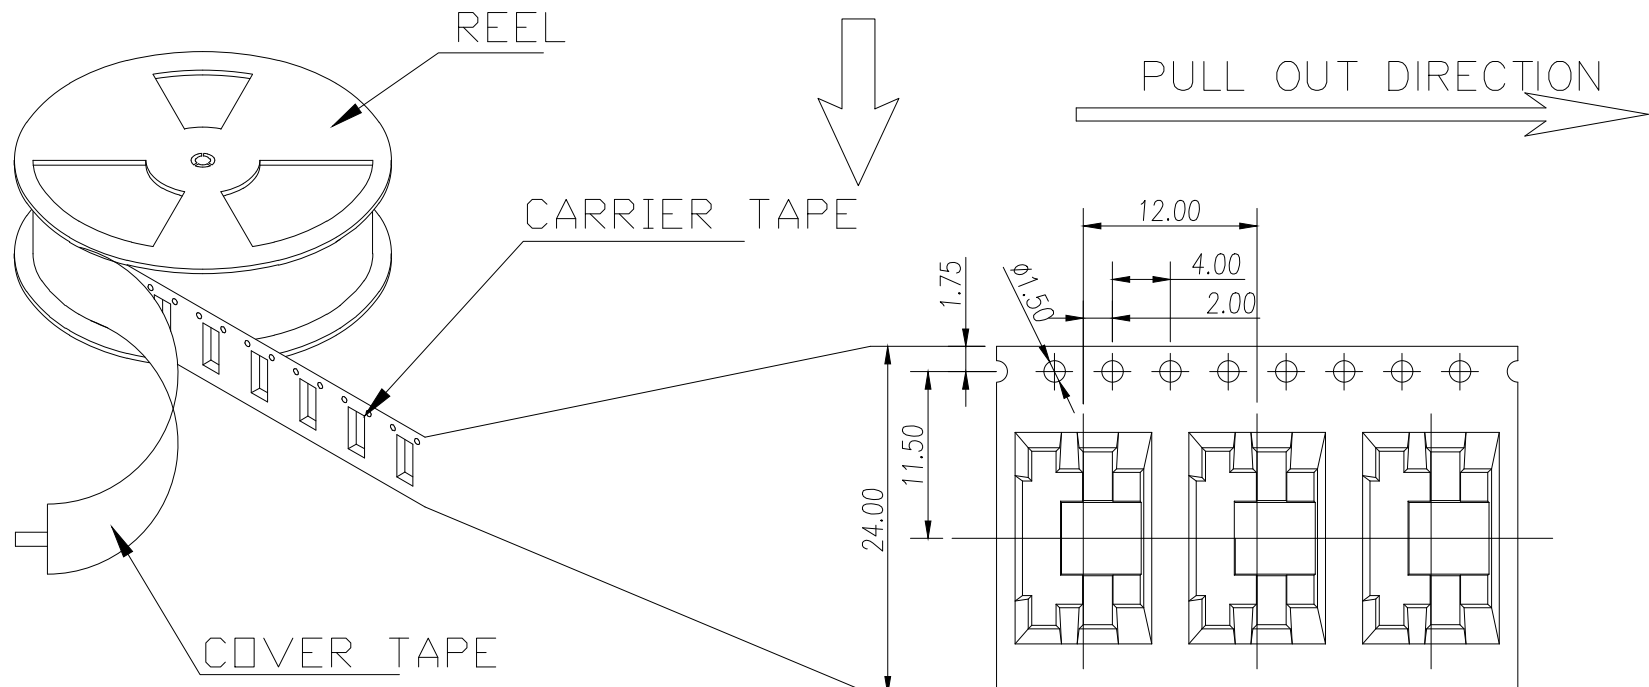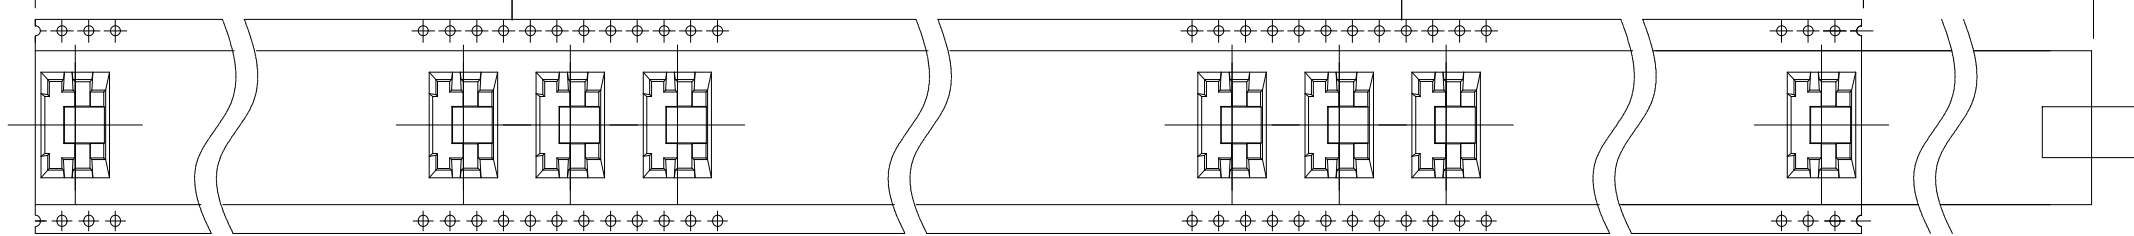

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, ØA=330
 - 2.2 CARRIER TAPE: T=0.30 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.5
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

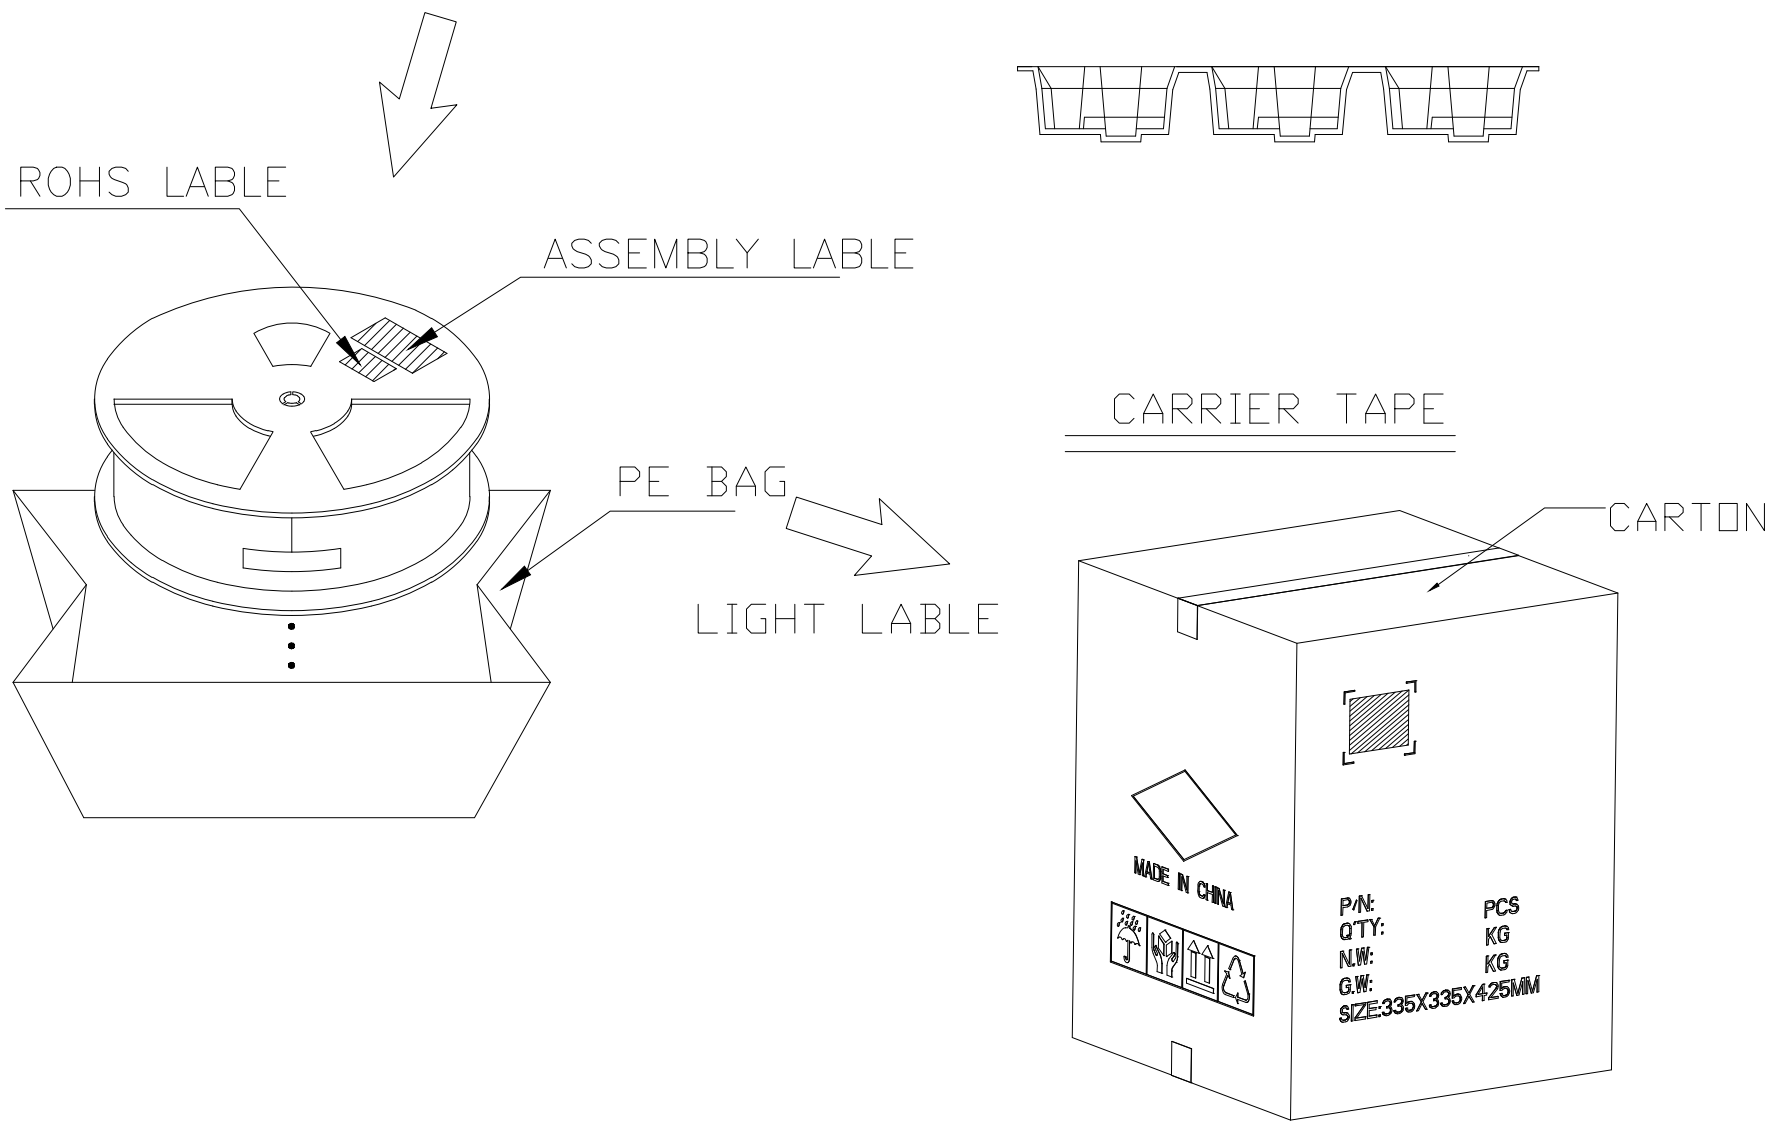

MATERIAL NO.: JK-US2016AGB0076R		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REVIEW TABLE FOR DETAILS		TITLE 16 Pin USB Type C 沉板1.35mm IPX8 Customer Drawing		ECN DESCRIPTION RELEASE TO TOOLING	
QUALITY SYMBOL = 12 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY KATE DENG		DATE
	X. ±0.25	X. ±4.0	CHECKED BY FAND		DATE
	.X ±0.20	.X ±3.0	APPROVED BY Wang Yan		DATE
	.XX ±0.15	.XX ±2.0			
		DOCUMENT NO.	SHEET NO. 1 OF 1	THIRD ANGLE PROJECTION	
		DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 10:1	