

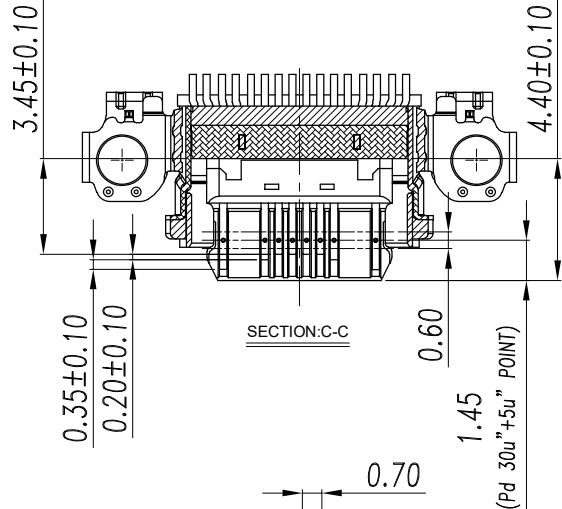
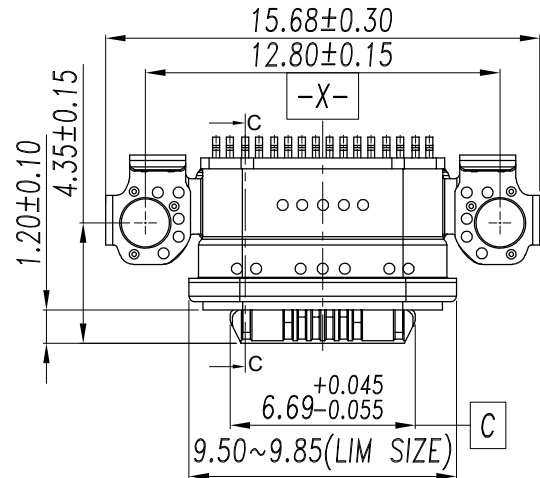
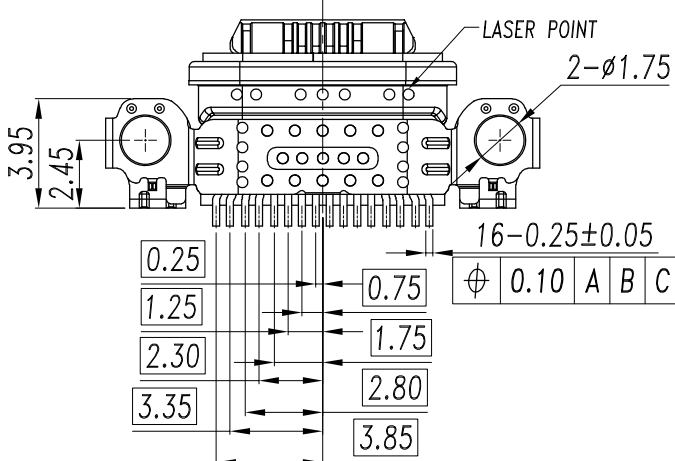

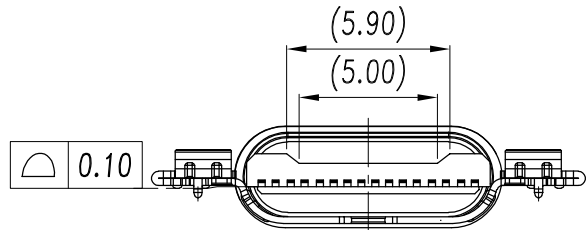
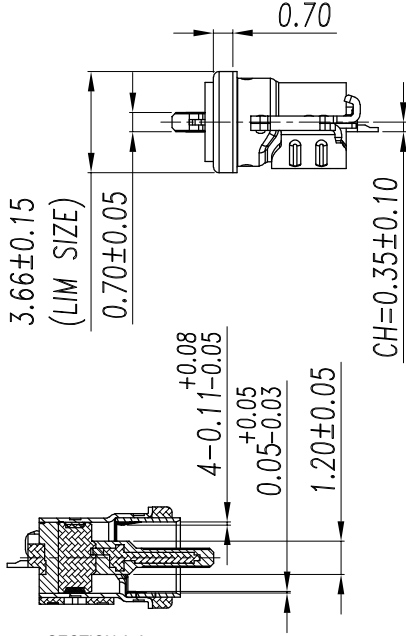


3D VIEW

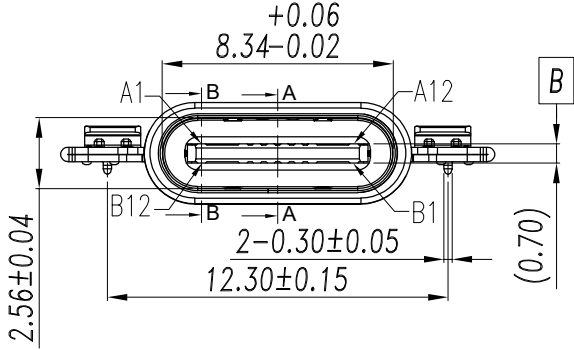

6	GLUE	EPOXY RESIN	COLOR:BLACK	x g
5	LIM_RING	SLILICA GEL	COLOR:RED	1 PCS
4	VEST SHELL	SUS 304-1/2H, T=0.25mm	50u\" NICKEL PLATED	1 PCS
3	OUT SHELL	SUS 316L, T=0.15mm	50u\" NICKEL PLATED	1 PCS
2	INNER SHELL	SUS 304-1/2H, T=0.15mm	NO PLATING	1 PCS
1	INSERT MD	MID PLATE, SUS 301-H, T=0.20mm	NO PLATING	1 PCS
		TOP/BOTTOM CONTACT: C18400, T=0.25mm	CONTACT AREA: Pd30u\"+5u\" Au	1 SET
		PLASTIC: PA46	COLOR: BLACK, UL94V_0	
NO.	NAME	MATERIAL	REMARKS	QTY

GENERAL TOLERANCES		UNIT	mm	杰康富精密电子有限公司	
DISTANCE	X.	±0.25		J K F precision Electronics Co., LTD	
	.X	±0.20		TITLE: USB TYPE C 16 PIN REC WATERPROOF CONN, CH=0.35mm	
	.XX	±0.15		SCREW HOLE CENTER DISTANCE=12.80mm	
	.XXX	±0.10		PART NO. JK-US3616AGB00203R	
ANGLE	X.	±3.0°		DRAWING NO.	
	.X	±2.0°		SCALE 1:1	
	.XX	±1.0°		SIZE A4	
				SHEET 1 OF 2	
REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED



- 3.HOUSING FLASH: 0.10 MM MAX,METAL BURR:0.05 MM MAX

Do not contact the
MID plate

Frame_A4
Rev.F2013/09/10