

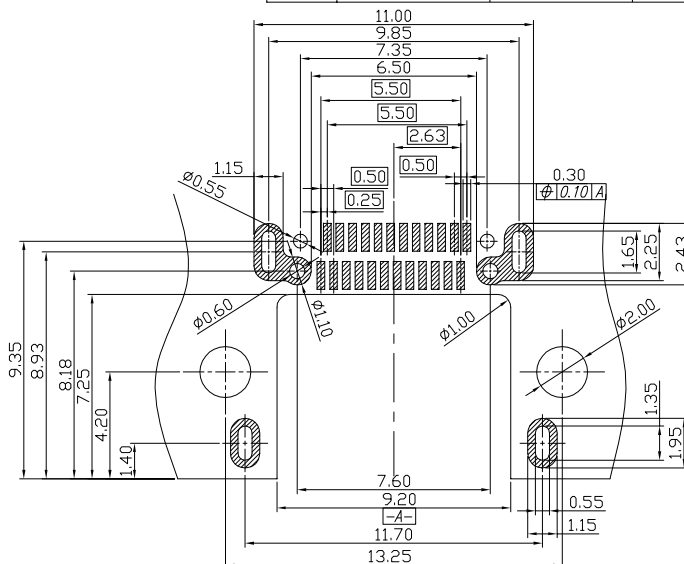
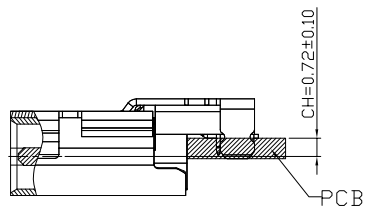
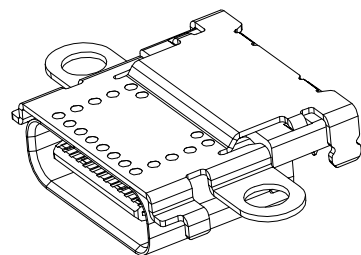
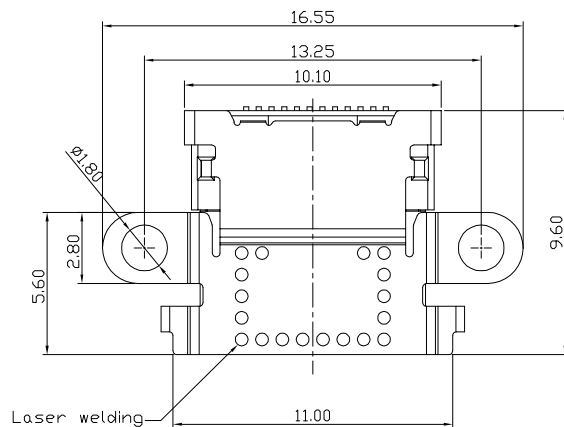
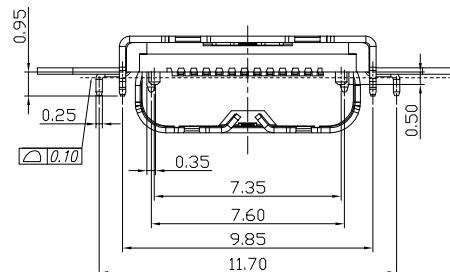


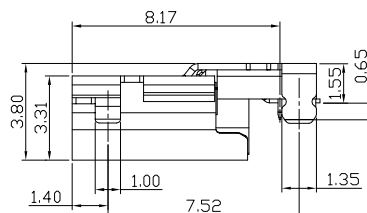

P.C.B LAYOUT VIEW TOLERANCE ±0.05

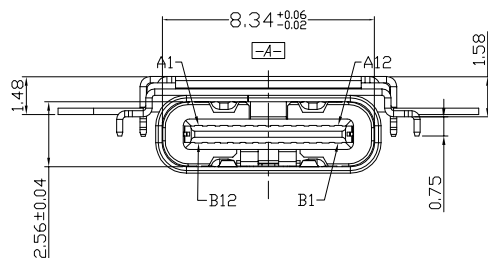

SPECIFICATION:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 5A
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 5~20N
 - EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - DURABILITY:10,000CYCLES
- THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CANNOT INDEPENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

PIN ASSIGNMENT													
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	BLADE	SHELL
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBUS	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBUS	D+	D-	CC2	VBUS	TX2-	TX2+	GND		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1	GND	GND

2	IM HOUSING	1 PCS	PLASTIC+CUPPER ALLOY+ STAINLESS STEEL	Au & Ni Plated
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:




JK-US1524AGB00112R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0°
	.X ±0.20	.X ±3.0°
	.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
24 Pin USB Type C Mid_mount 1.55H		RELEASE TO TOOLING	
9.60L Customer Drawing		DRAWN BY	DATE
J K F Technology Co.,Ltd		KATE DENG	
DOCUMENT NO.		CHECKED BY	DATE
		FAND	----
SHEET NO.		APPROVED BY	DATE
1 OF 1		Wang Yan	----
DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	

frame size: A4
Rev.A 2022.04.09

160mmMIN.(15CAV. EMPTY) LOADING 1000 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACKAGE SECTION LEADER SECTION COVER TAPE

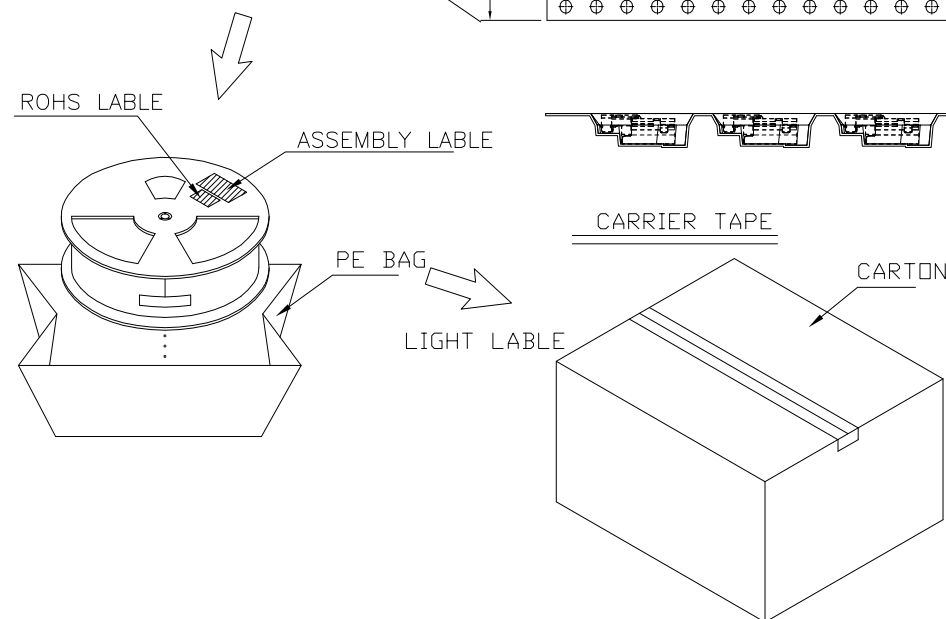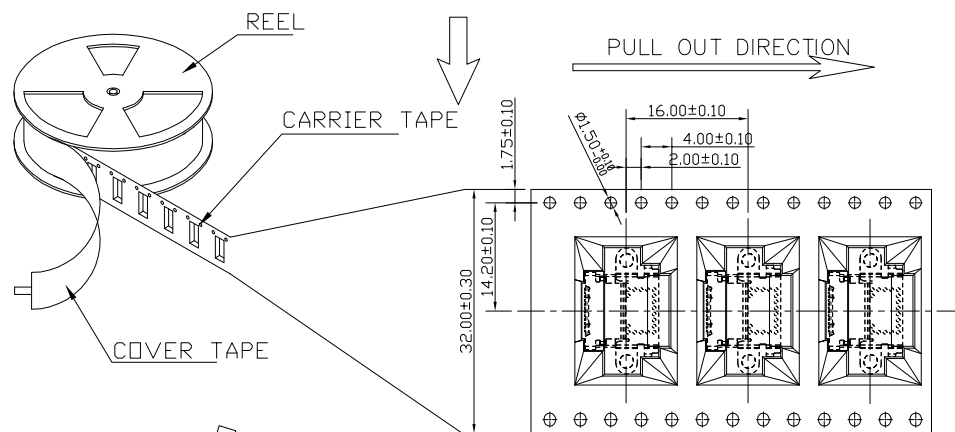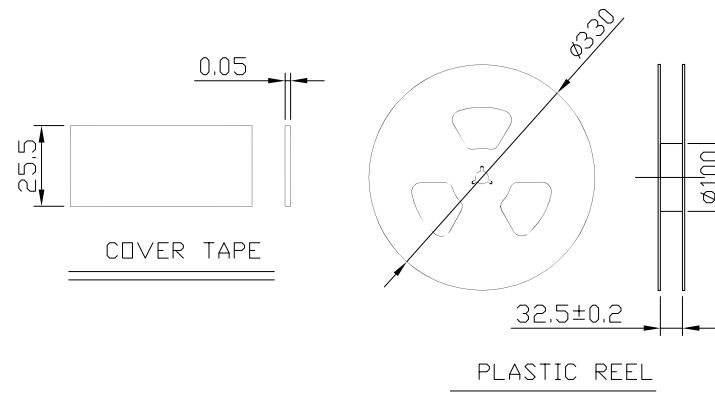

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=32.5, ØA=330
- 2.2 CARRIER TAPE: T=0.50 W=32.0
- 2.3 COVER TAPE: T=0.05 W=25.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1000 PCS/REEL
- 3.2 SECONARY PACKING: 10 REELS/CARTON(10000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US1524AGB00112R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0
	.X ±0.20	.X ±3.0
	.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
24 Pin USB Type C Mid_mount 1.55H		RELEASE TO TOOLING	
9.60L Customer Drawing		DRAWN BY	DATE
		KATE DENG	
		CHECKED BY	DATE
		FAND	----
DOCUMENT NO.		APPROVED BY	DATE
		Wang Yan	----
DIMENSION STYLE		SCALE	THIRD ANGLE PROJECTION
MM ONLY		10:1	