


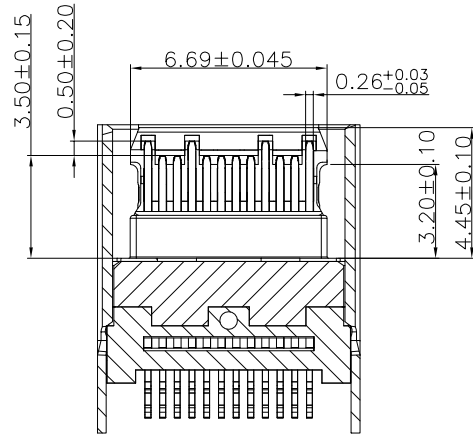

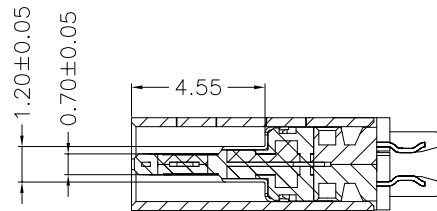
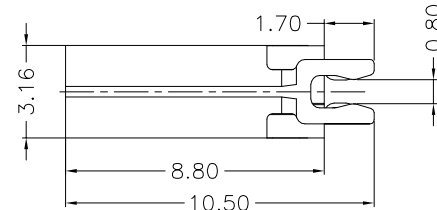


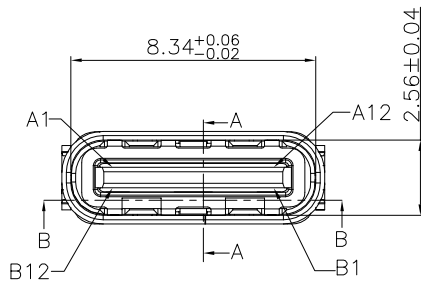

SECTION B-B

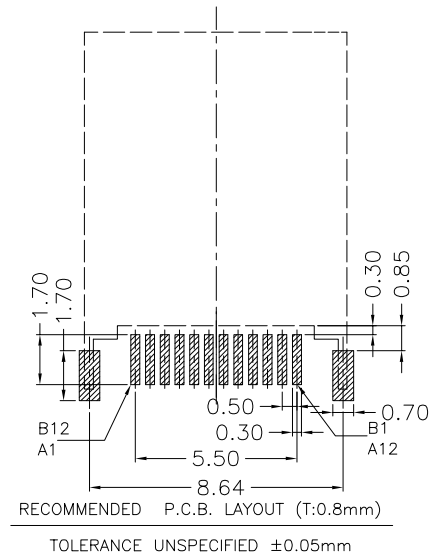

SECTION A-A



RECOMMENDED P.C.B. LAYOUT (T:0.8mm)
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1SET
3	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MATERIAL NO.:

JK-US8824AGB0036R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL = 12 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X.X ±0.30	X.* ± 2°
	.XX ±0.20	.X* ± 1°
	.XXX ±0.10	.XX* ±0.5°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE C F 24P夹板式0.8短体8.8 CONN.		ECN DESCRIPTION RELEASE TO TOOLING	
DRAWN BY KATE DENG		DATE -----	
CHECKED BY FAND		DATE -----	
APPROVED BY Wang Yan		DATE -----	
DOCUMENT NO.		SHEET NO. 1 OF 1	
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC	
SCALE 10:1		THIRD ANGLE PROJECTION	

frame size: A4
Rev.A 2022.04.09