

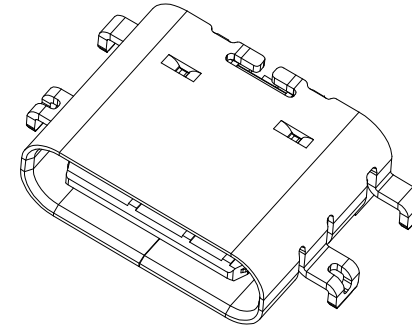
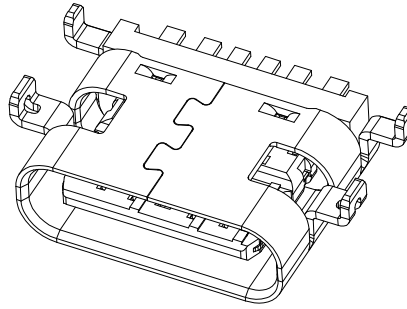


SPECIFICATION:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 3A
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - INSULATION RESISTNACE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS
 - INSERTION FORCE: 5~20N
 - EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - DURABILITY:10,000CYCLES
- THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDENDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

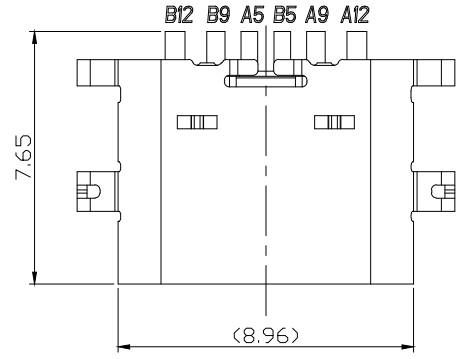

MATERIAL NO: JK-US2306AGB006R		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REVIEW TABLE FOR DETAILS		TITLE 6 Pin USB Type C Mid_mount 6.80L 2.36H Assembly Drawing		ECN DESCRIPTION RELEASE TO TOOLING	
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY KATE DENG		DATE
	X. ±0.25	X. ±4.0	CHECKED BY FAND		DATE
	.X ±0.20	.X ±3.0	APPROVED BY Wang Yan		DATE
	.XX ±0.15	.XX ±2.0	SHEET NO. 1 OF 1		DATE
DISTANCE		ANGLE	THIRD ANGLE PROJECTION		
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC	SCALE 10:1		

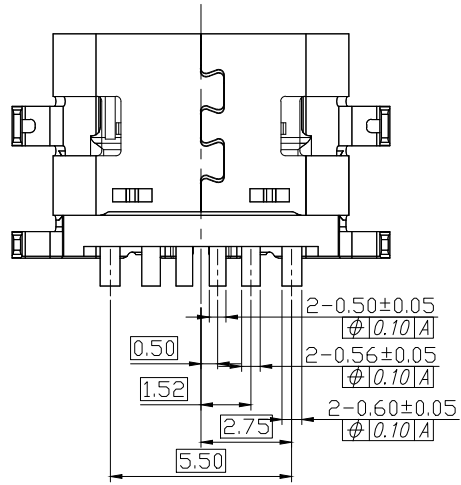