


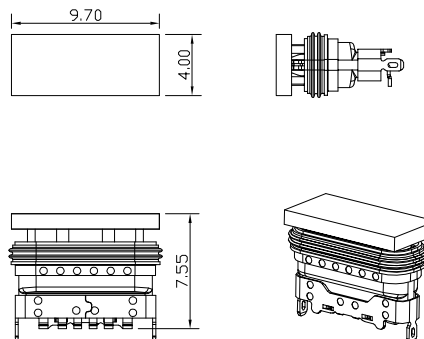




REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	



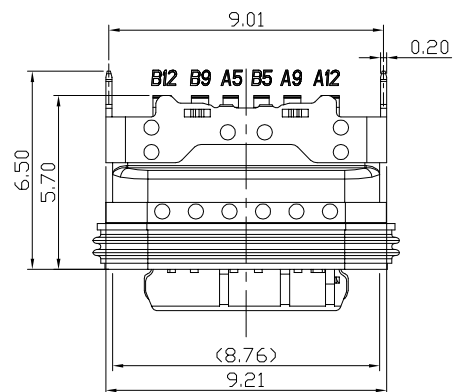


Assembly CAP(1:2)

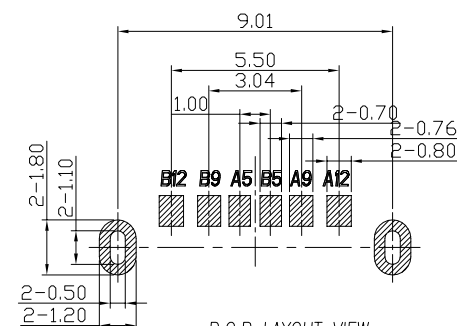

P.C.B LAYOUT VIEW

TOLERANCE ±0.05

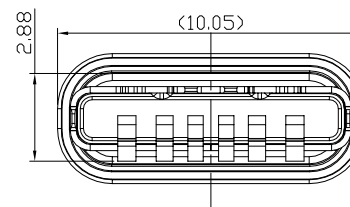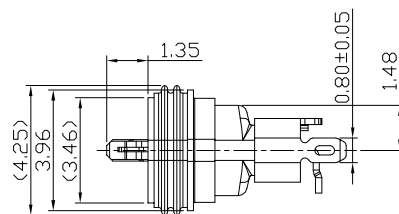

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 3A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTANCE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
- 2.3 DURABILITY:10,000CYCLES
- 2.4 WATERPROOF:IPX8

3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CONNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2+	RX2-	GND	GND	GND
GND	RX1+	RX1-	VBUS	SBU2	D+	D-	CC2	VBUS	TX2+	TX2-	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

2	I/M HOUSING	1 PCS	PLASTIC+COPY AOLLY+STAINLESS STEEL	Au & Ni Plated
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US5706AGB0056R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0°
	.X ±0.20	.X ±3.0°
	.XX ±0.15	.XX ±2.0°



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
6 Pin USB Type C On Board Vertical		RELEASE TO TOOLING	
5.70H SMT IPX8 Customer Drawing		DRAWN BY	DATE
		KATE DENG	
		CHECKED BY	DATE
		FAND	----
		APPROVED BY	DATE
		Wang Yan	----
DOCUMENT NO.		SHEET NO.	1 OF 1
DIMENSION STYLE		DESIGN UNITS	SCALE
MM ONLY		METRIC	10:1
		THIRD ANGLE PROJECTION	

frame size: A4
Rev.A 2022.04.09

160mmMIN.(15CAV. EMPTY) LOADING 600 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

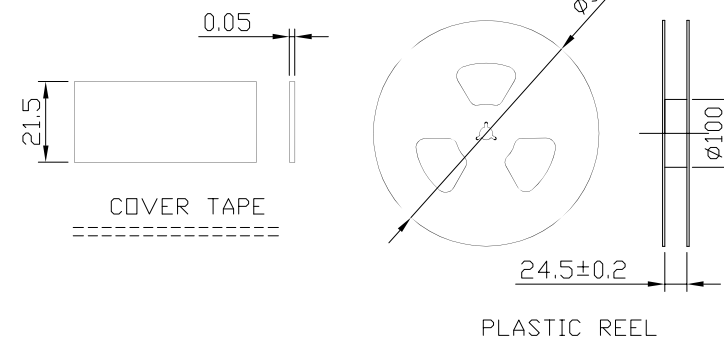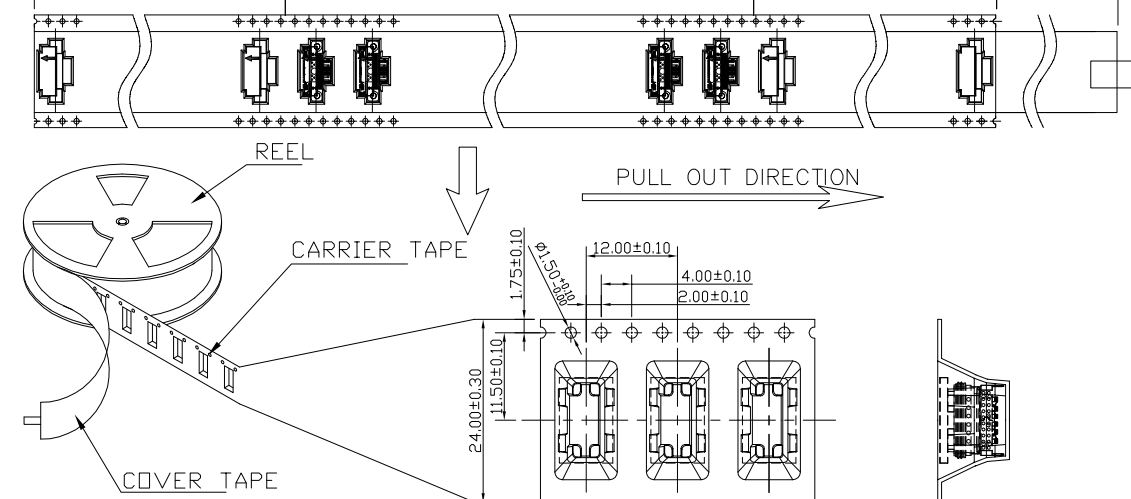

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:


- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.50 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 600 PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(7200PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

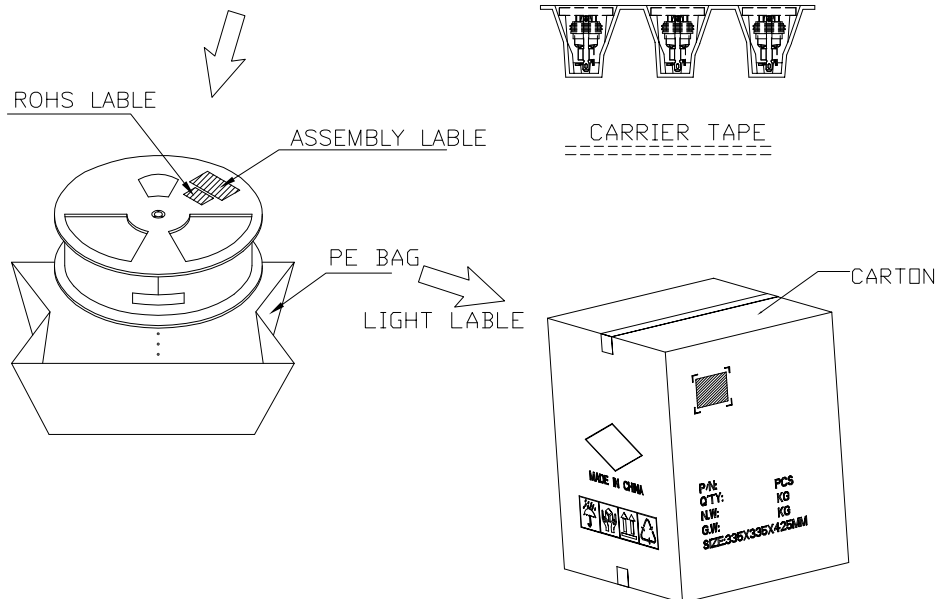

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US5706AGB0056R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		6 Pin USB Type C On Board Vertical		RELEASE TO TOOLING	
		5.70H SMT IPX8 Customer Drawing		DRAWN BY	
				KATE DENG	
				CHECKED BY	
				FAND	
		DOCUMENT NO.		APPROVED BY	
				Wang Yan	
		SHEET NO.		DATE	
		1 OF 1			
		SCALE		THIRD ANGLE PROJECTION	
		10: 1			
		DIMENSION STYLE			
		MM ONLY			
		DESIGN UNITS			
		METRIC			