

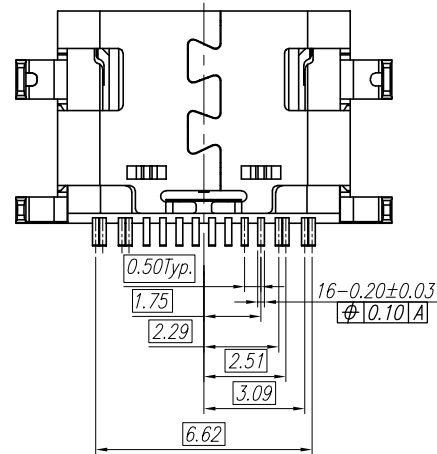
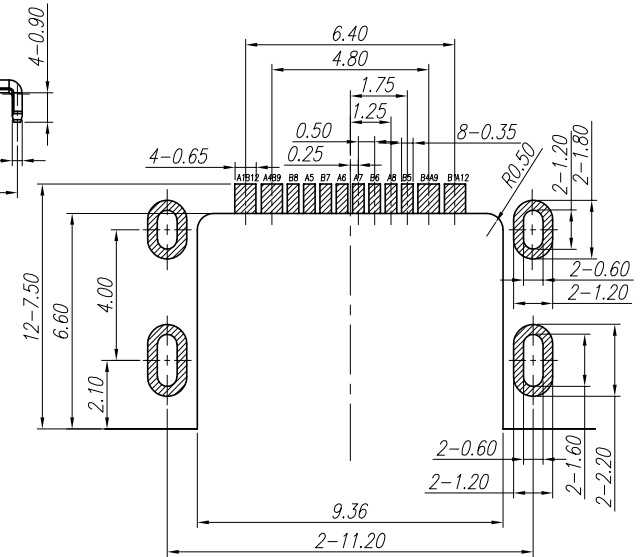
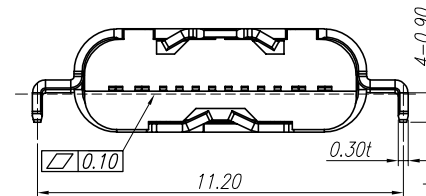
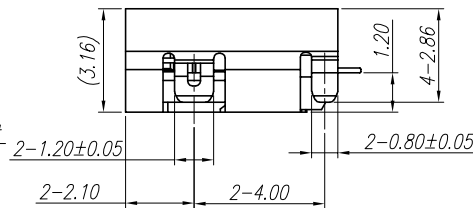
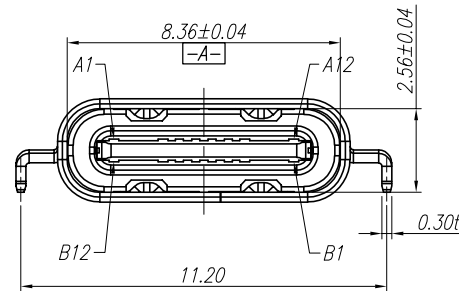


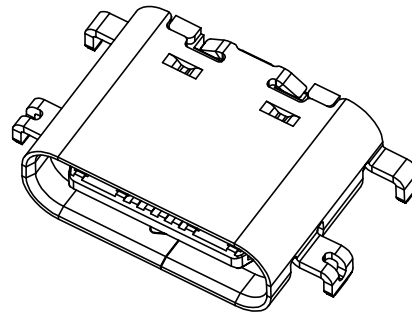

REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

SPECIFICATION:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 5A
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - INSULATION RESISTNACE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 5~20N
 - EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - DURABILITY:10,000CYCLES
- THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CANNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

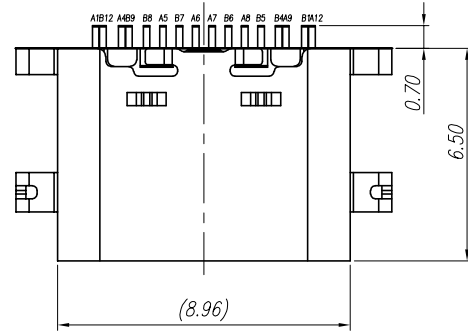

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	MID PLATE	1 PCS	STAINLESS STEEL	None
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	PLASTIC	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:
JK-US3216AGB00127R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽ = 0	X±0.60 X*±5.0°
▽ = 12	.X±0.35 .X*±3.0°
▽ = 12	.XX±0.25 .XX*±2.5°
▽ = 12	.XXX±0.15 .XXX*±2.0°




THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
16 Pin USB Type C 沉板1.20		RELEASE TO TOOLING	
DRAWN BY		DATE	
KATE DENG		-----	
CHECKED BY		DATE	
FAND		-----	
APPROVED BY		DATE	
Wang Yan		-----	
THIRD ANGLE PROJECTION			

DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	

frame size: A4
Rev.A 2022.04.09

160mmMIN.(15CAV. EMPTY) LOADING 1500PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

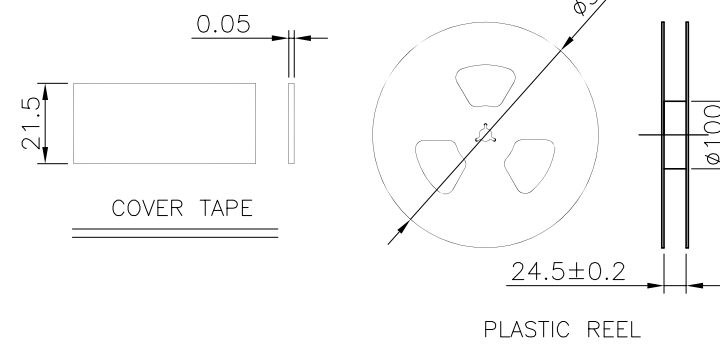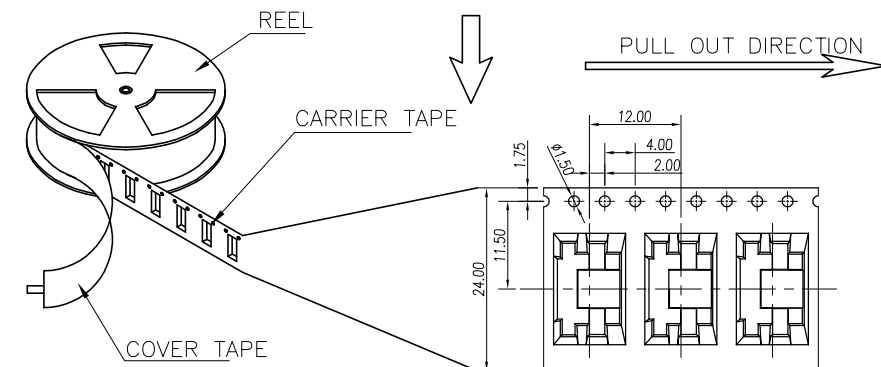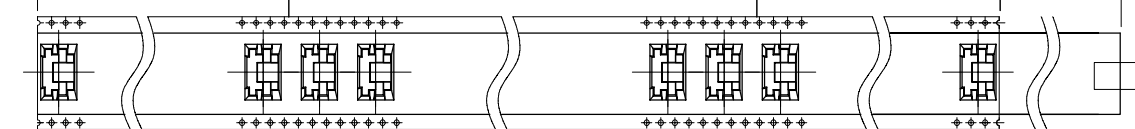

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:


- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm

3. QUANTITY :


- 3.1 PRIMAY PACKING: 1500PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

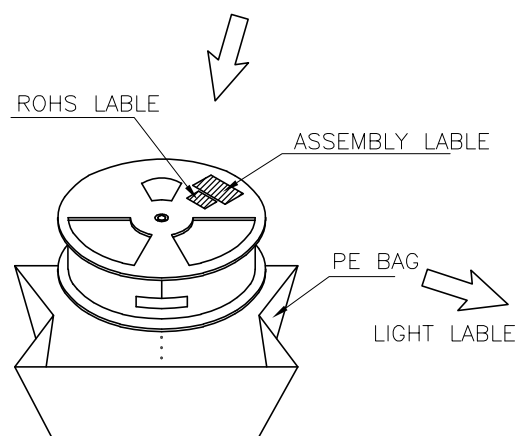

CARRIER TAPE

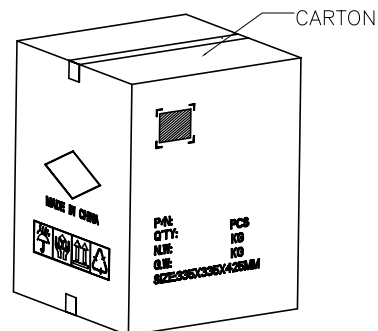

MATERIAL NO.:

JK-US3216AGB00127R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ± 0.25	X. ± 0.4
	.X ± 0.20	.X ± 0.3
	.XX ± 0.15	.XX ± 0.2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE	ECN DESCRIPTION
16 Pin USB Type C 沉板1.20	RELEASE TO TOOLING

DRAWN BY	DATE
KATE DENG	

CHECKED BY	DATE
FAND	----

APPROVED BY	DATE
Wang Yan	----

DOCUMENT NO.	SHEET NO.
	1 OF 1

DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	

frame size: A4
Rev.A 2022.04.09