









REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

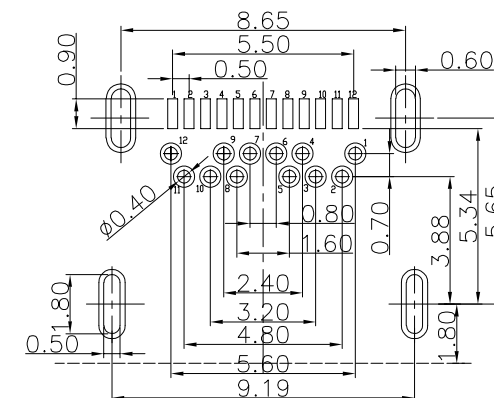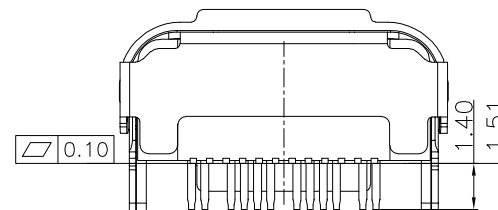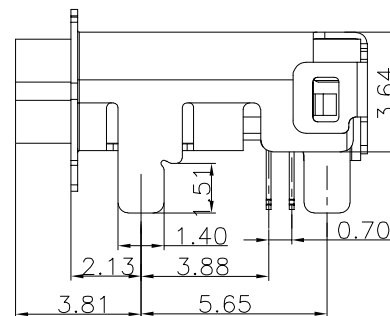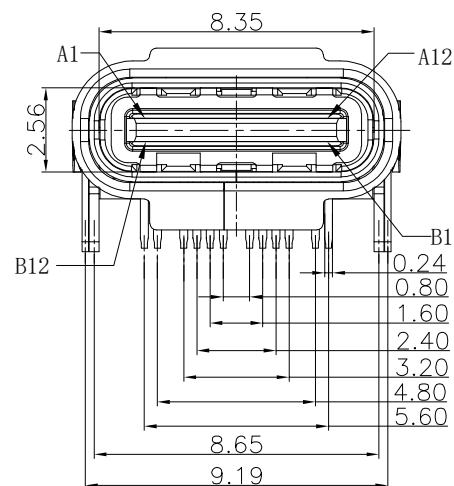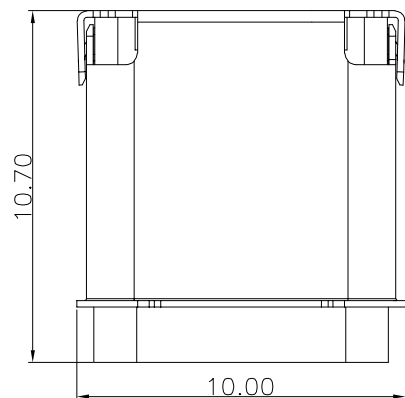

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MATERIAL NO.:

JK-US3624AGB0027R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X.X ±0.30	X.'± 2'
.XX ±0.20	.X'± 1'
.XXX±0.10	.XX'±0.5'

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
C F前插后贴双壳垫高型 CONN		RELEASE TO TOOLING	
DRAWN BY		DATE	
KATE DENG		-----	
CHECKED BY		DATE	
FAND		-----	
APPROVED BY		DATE	
Wang Yan		-----	
THIRD ANGLE PROJECTION			



J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO.

1 OF 1

DIMENSION STYLE

MM ONLY

DESIGN UNITS

METRIC

SCALE

10:1



THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09