

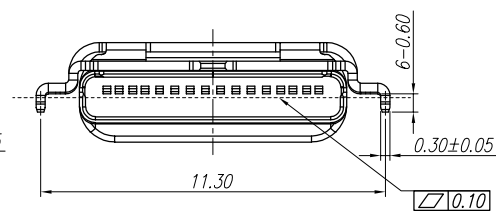
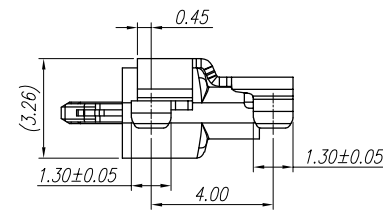
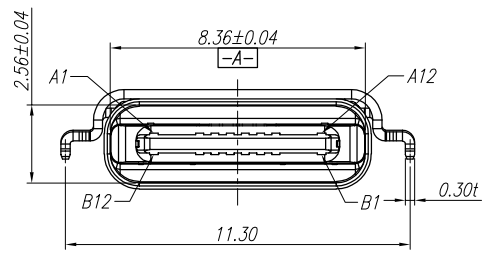
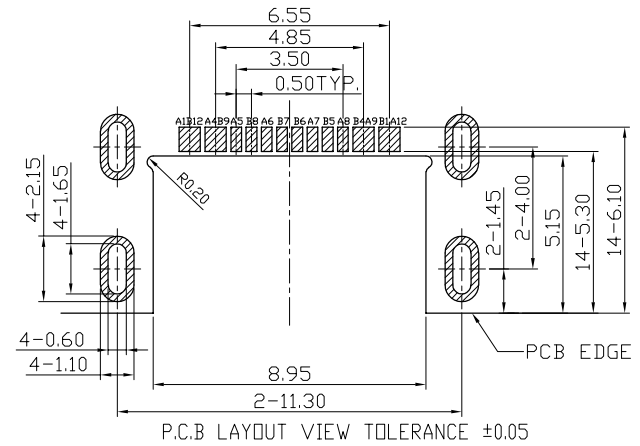
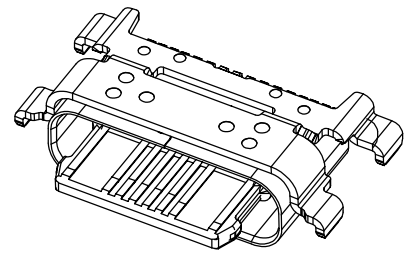


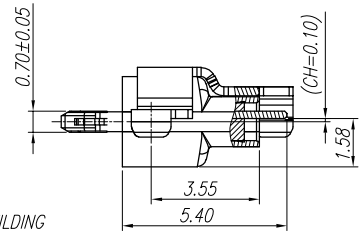

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

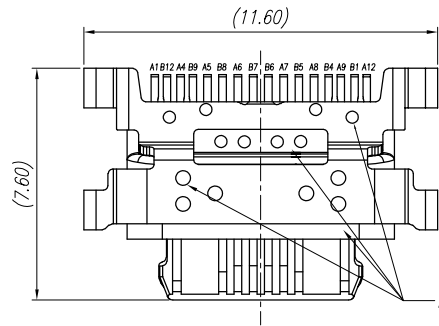


SPECIFICATION:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 8A
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - INSULATION RESISTNACE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 5~20N
 - EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - DURABILITY:10,000CYCLES
- THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CANNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBu2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBu1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

5	OUT_SHELL	1 PCS	STAINLESS STEEL	Ni Plated
4	MID PLATED	1 SET	STAINLESS STEEL	None
3	CONTACT	1 SET	COPPER ALLOY	Au & Ni Plated
2	MOLDING HOUSING	1 PCS	High Temp. Plastic	None
1	SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

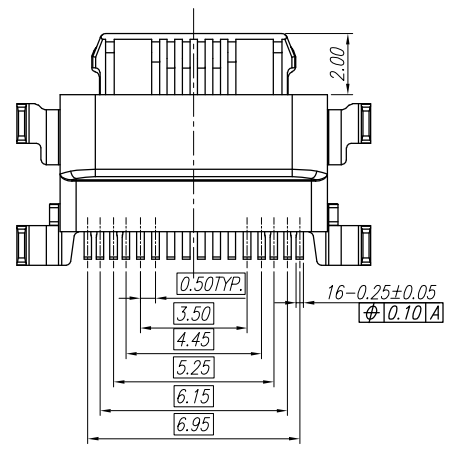




MATERIAL NO.:
JK-US1716AGB00145R

REVIEW TABLE FOR DETAILS	
QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽ = 0	X. ±0.25 X. ±4.0
▽ = 12	.X ±0.20 .X ±3.0
	.XX ±0.15 .XX ±2.0


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
16 Pin USB Type C Mid_mount防水IPX7 1.68H	
RELEASE TO TOOLING	
DRAWN BY KATE DENG	DATE
CHECKED BY FAND	DATE
APPROVED BY Wang Yan	DATE
DOCUMENT NO.	SHEET NO. 1 OF 1
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC
SCALE 10:1	THIRD ANGLE PROJECTION

160mmMIN.(15CAV. EMPTY) LOADING 1500 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

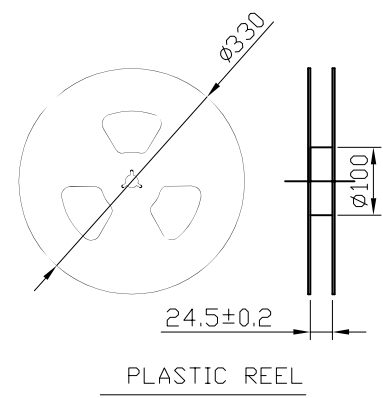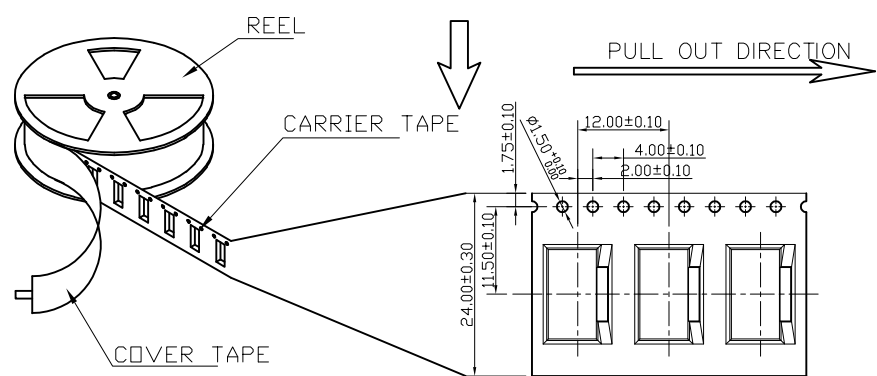

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.50 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.3
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

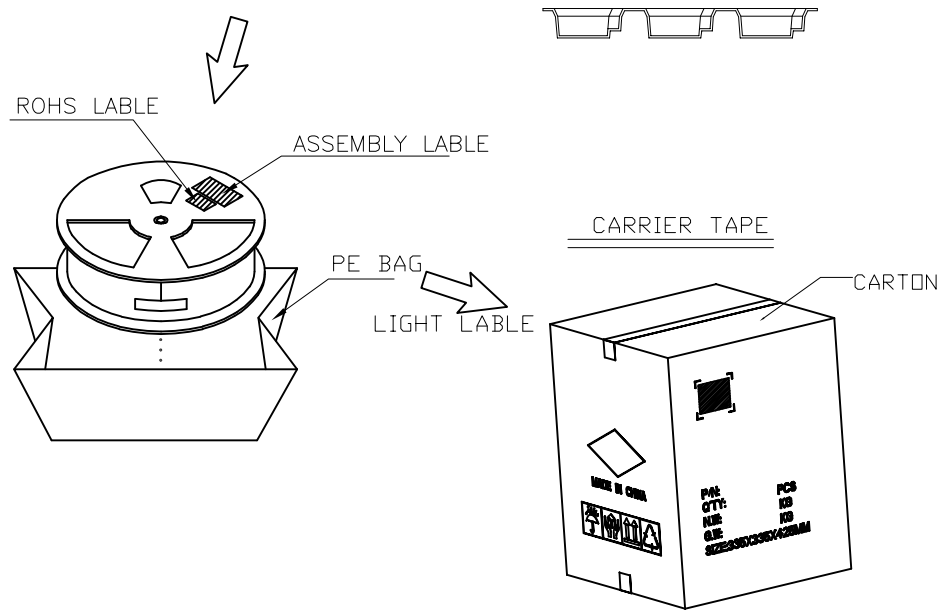

MATERIAL NO.:			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
JK-US1716AGB00145R			TITLE			ECN DESCRIPTION					
REVIEW TABLE FOR DETAILS			16 Pin USB Type C Mid_moun防水IPX7 1.68H			RELEASE TO TOOLING					
QUALITY SYMBOL	= 0 = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		 J K F Technology Co.,Ltd			DRAWN BY		DATE		
		X. ±0.25 X. ±4.0					KATE DENG				
		.X ±0.20 .X ±3.0		CHECKED BY		DATE					
		.XX ±0.15 .XX ±2.0		FAND		-----					
				DOCUMENT NO.		SHEET NO.		APPROVED BY		DATE	
						1 OF 1		Wang Yan		-----	
						DIMENSION STYLE		DESIGN UNITS		SCALE	
				MM ONLY		METRIC		10:1		