

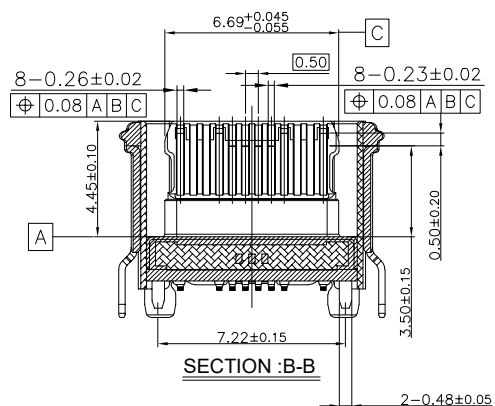




4.5. Waterproof Level: IPX8

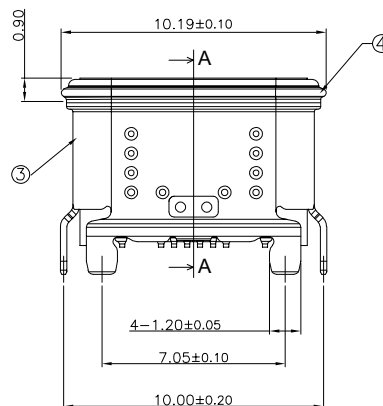

6	GLUE	EPOXY RESIN	COLOR:BLACK	g
5	LIM_ RING	SLILICA GEL	NA	1 PCS
4	EMC	SUS 316L, T=0. 12mm	CLEAN	1 PCS
3	OUT SHELL	SUS 304-H, T=0. 25mm	50u" NICKEL PLATED	1 PCS
2	INNER SHELL	SUS 316L, T=0. 20mm	NO PLATING	1 PCS
1	INSERT MD	MID PLATE, SUS 301-H, T=0. 15mm	NO PLATING	SET
		CONTACT:C18400, T=0. 12mm	AU/NICKEL PLATED	
		PLASTIC:PA46	COLOR:BLACK, UL94V_0	
NO.	NAME	METERIAL	REMARKS	QTY

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 J K F precision Electronics Co., LTD			
DISTANCE X.		MATERIAL	SEE NOTES		TITLE:USB TYPE C 16 PIN 立贴防水母座, H=6.50mm				
X. ±0.25		FINISHED	SEE NOTES						
.X ±0.20									
.XX ±0.15		APPROCED	KATE DENG	PART NO.		JK-US6516AGB00181R			
.XXX ±0.10		CHECKED	KATE DENG						
ANGLE		DESIGN	FAND	DRAWING NO.		SCALE 1:1SIZE A3SHEET 1 OF 1REV. A			
X. ±3.0°		DRAWN	Wang Yan						
.X ±2.0°									
.XX ±1.0°									

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------



PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2					
A3					
A4	V _{BUS}	Bus Power	B9	V _{BUS}	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use(SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	V _{BUS}	Bus Power	B4	V _{BUS}	Bus Power
A10			B3	SSTxN2	
A11			B2	SSTxP2	
A12	GND	Ground return	B1	GND	Ground return

Frame_A3
Rev.F2013/09/10

F




E

D

C





B

A

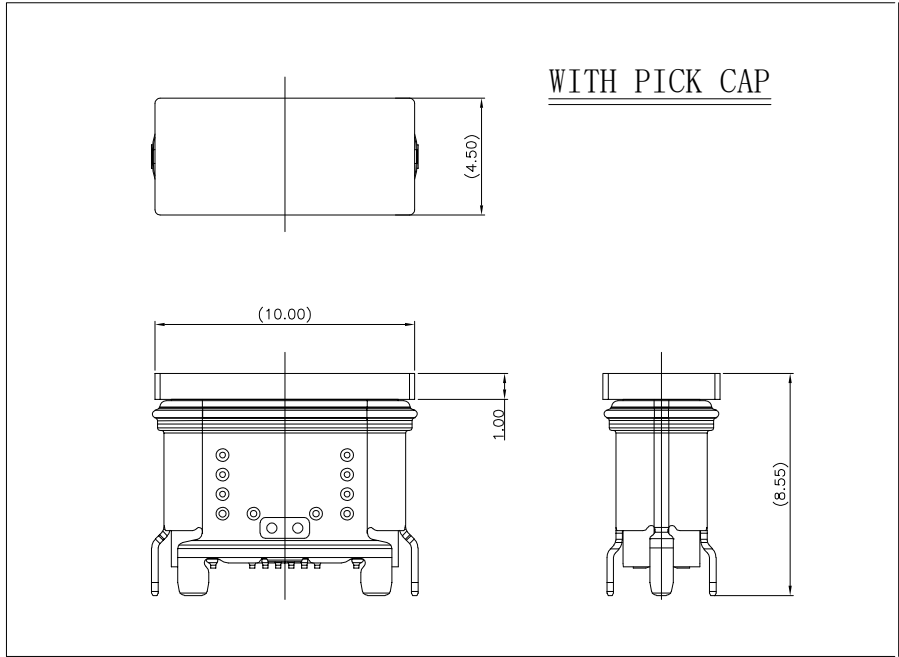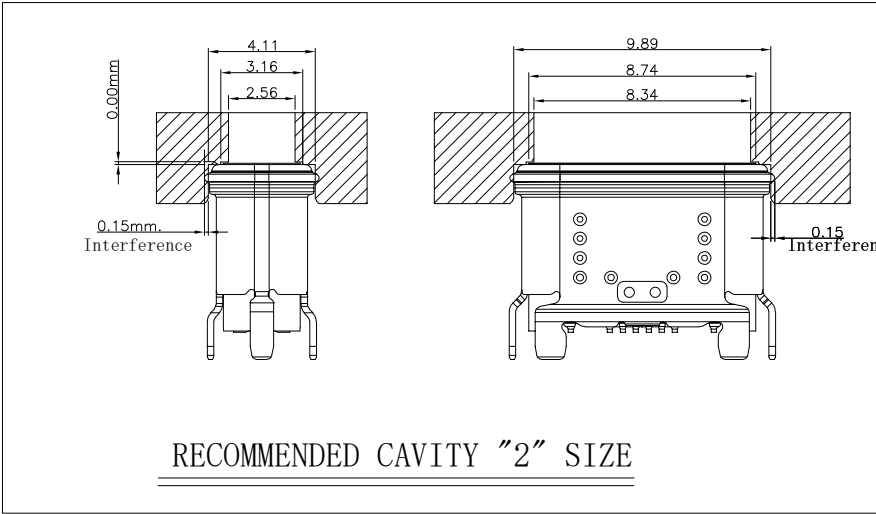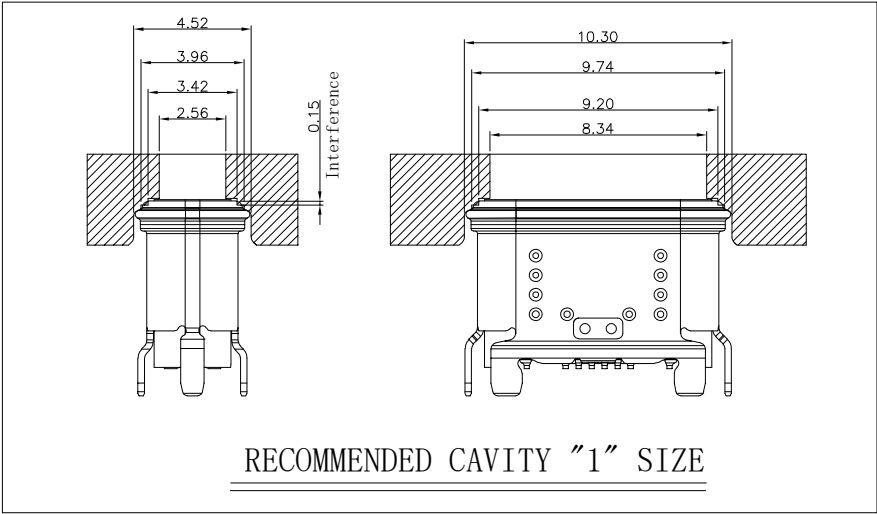



REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 J K F precision Electronics Co., LTD										
DISTANCE	X.	±0.25	MATERIAL	SEE NOTES		TITLE:	USB TYPE C 16 PIN 立贴防水母座, H=6.50mm									
	.X	±0.20	FINISHED	SEE NOTES												
	.XX	±0.15	APPROVED	KATE DENG												
	.XXX	±0.10	CHECKED	KATE DENG			PART NO. JK-US6516AGB00181R									
ANGLE	X.	±3.0°	DESIGN	FAND		DRAWING NO.										
	.X	±2.0°	DRAWN	Wang Yan		SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A			
	.XX	±1.0°														

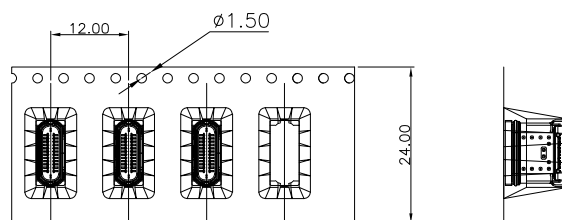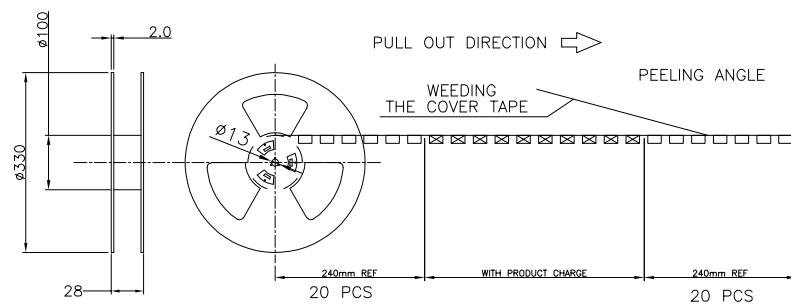

Vacuum Packing

Desiccant



	REEL	CARTON
CONNECTOR (PCS)	600	6000

备注:

- 1.包装数量: 520PCS/REEL, 10 REEL/CARTON, 共5200PCS.
- 2.材料: 纸箱: 纤维板, 瓦楞, 双层壁.
- 3.载带剥离强度: 0.1 ~ 1.3 N(10 ~ 130克)
- 4.脱皮速度: 300mm /min。
- 5.外箱上贴号物料标签及RoHS 标签
- 6.同一产品只能装同一纸箱, 不允其它产品;
- 7.每个袋子都应包括干燥剂*1

GENERAL TOLERANCES		UNIT	mm			 杰 康 富 精 密 电 子 有 限 公 司 <i>J K F precision Electronics Co., LTD</i>							
DISTANCE X.		MATERIAL		SEE NOTES									
X. ±0.25		FINISHED		SEE NOTES		TITLE: USB TYPE C 16 PIN 立贴防水母座, H=6.50mm							
.X ±0.20		APPROCED		KATE DENG									
.XX ±0.15		CHECKED		KATE DENG		PART NO. JK-US6516AGB00181R							
.XXX ±0.10		DESIGN		FAND		DRAWING NO.							
ANGLE		DRAWN		Wang Yan		SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
X. ±3.0°													
.X ±2.0°													
.XX ±1.0°													

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------