
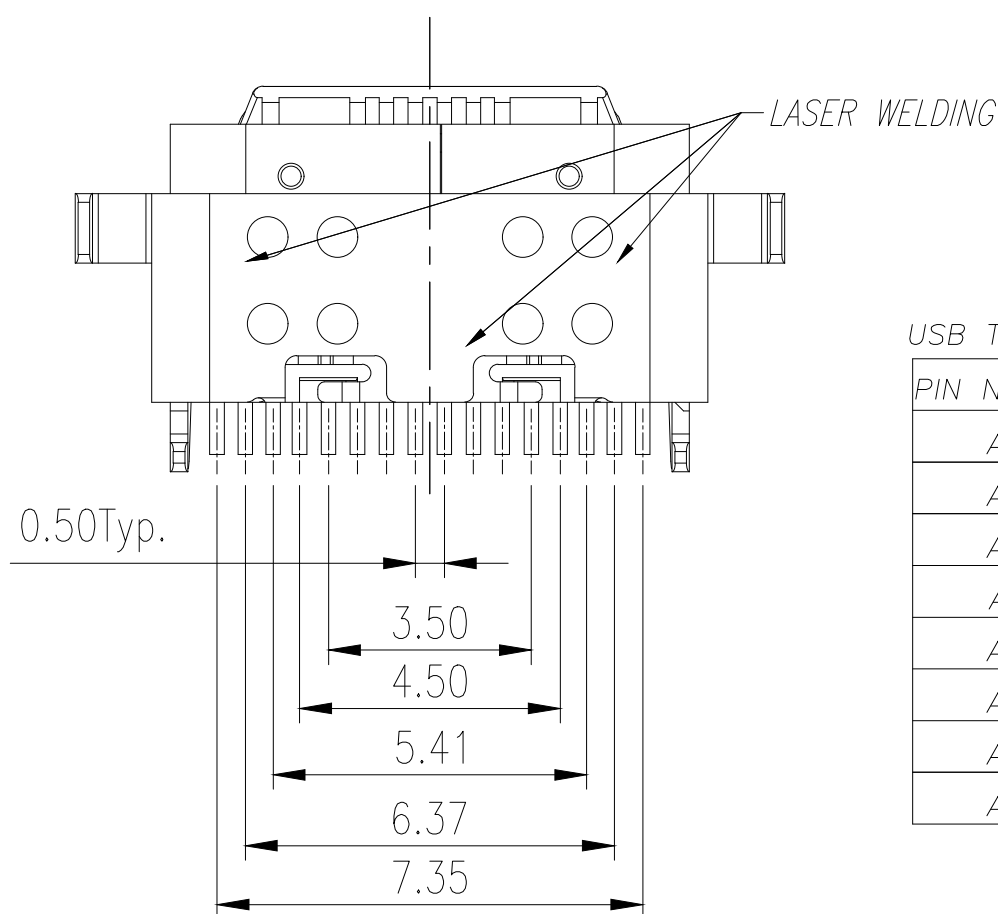
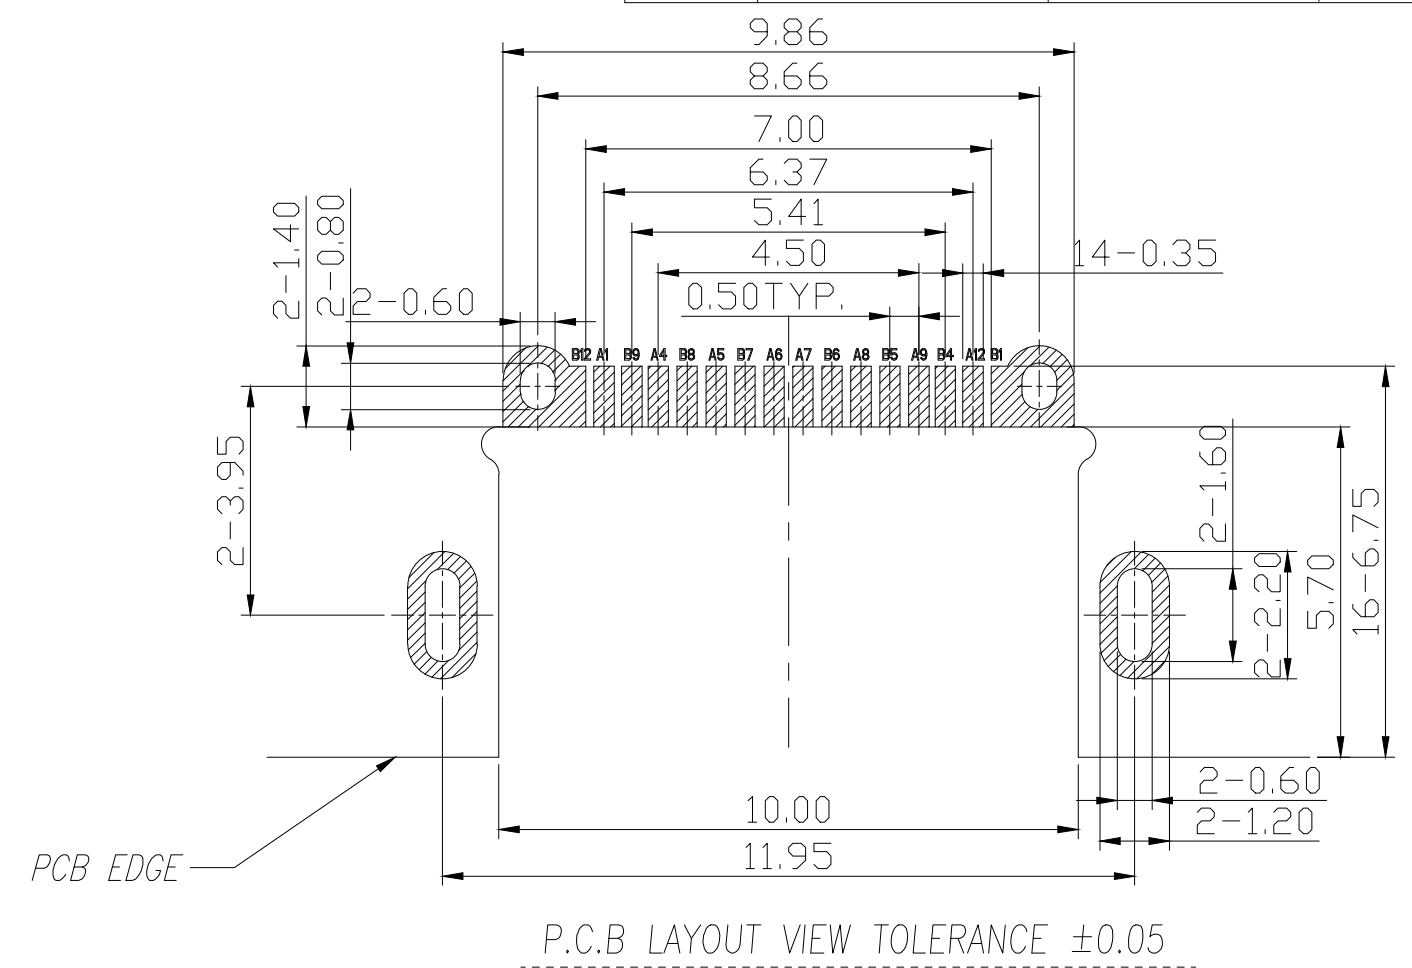
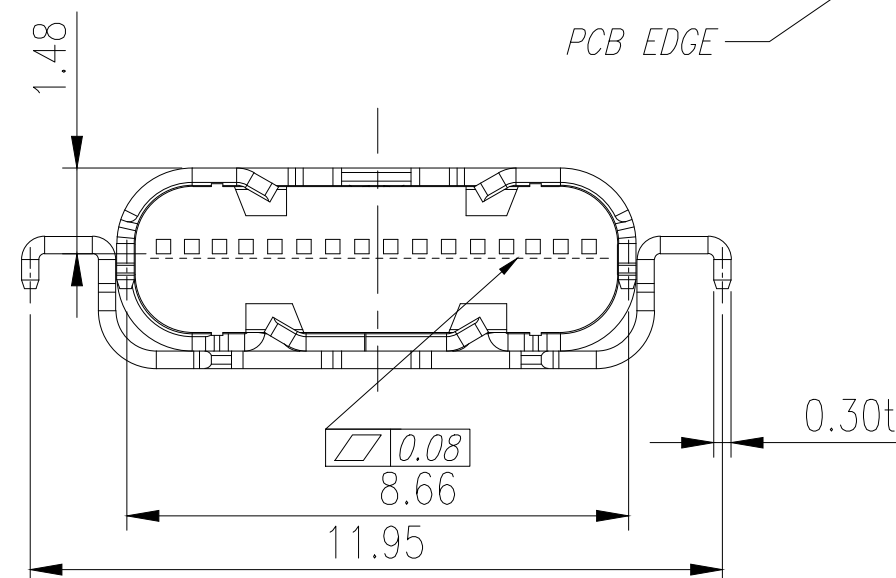
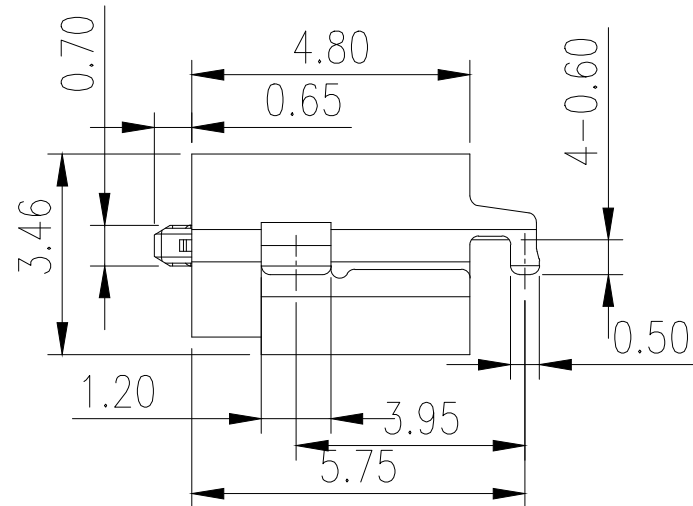
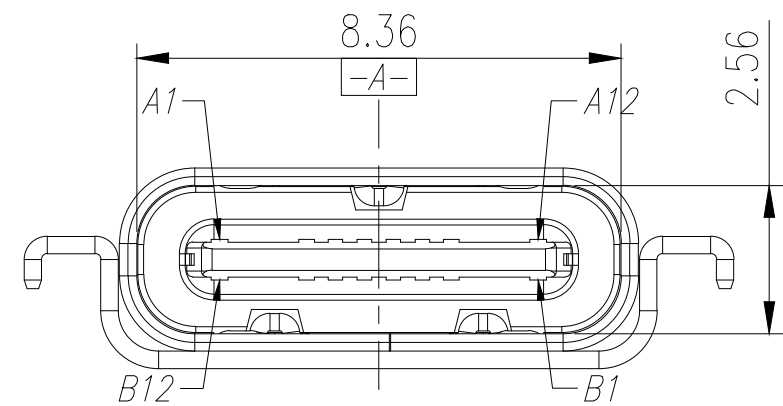
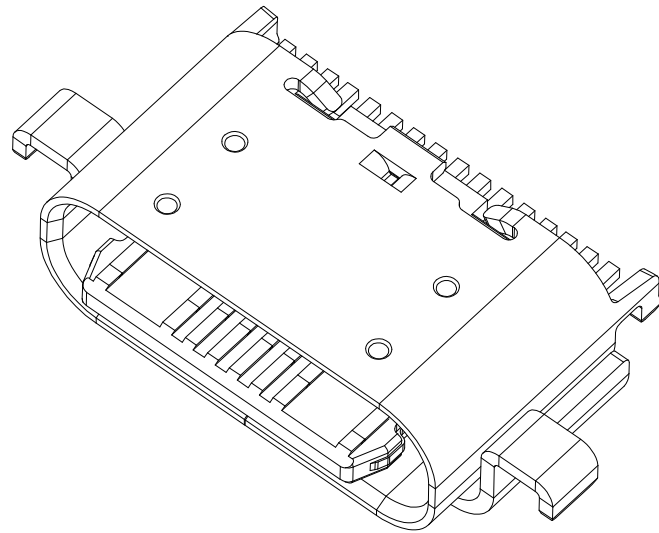


RoHS
Compliant

REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

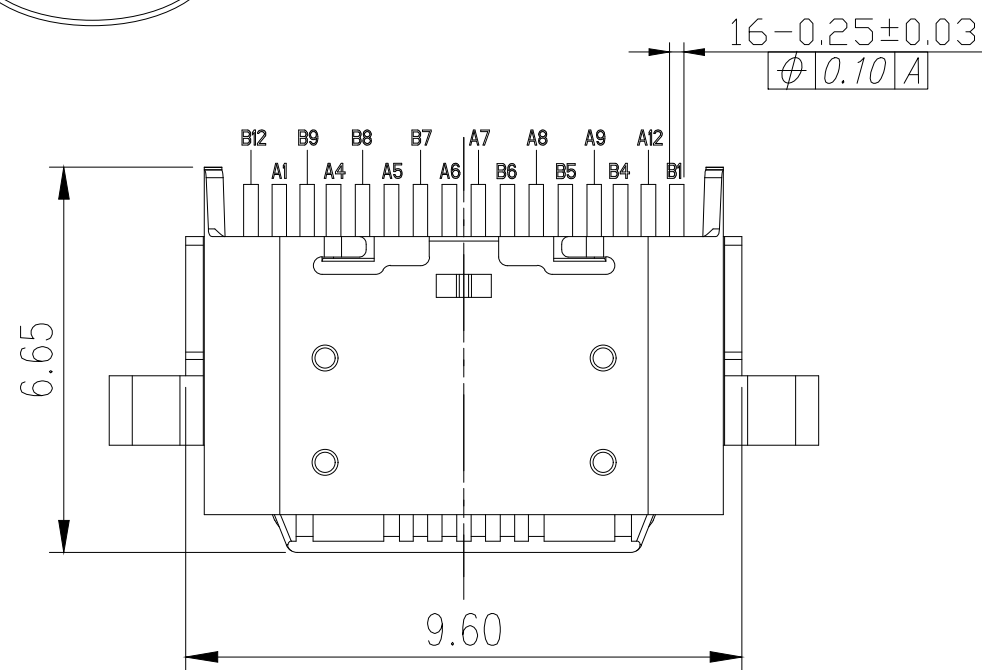

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

2	IM HOUSING	1 PCS	HIGH TEM. PLASTIC+COPPER ALLOY +STAINLESS STEEL	TERMINAL Au & Ni Plated
1	SHELL+OUT SHELL	1 PCS	STAINLESS STEEL	Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

SPECIFICATION:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 5 A
 - TEMPERATURE RANGE: -40 °C ~ 85 °C
 - CONTACT RESISTANCE: 30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
 - INSULATION RESISTNACE: 100 MEGOHMS MIN.
- MECHANICAL CHARACTERISTICS
 - INSERTION FORCE: 5~20N
 - EXTRACTION FORCE: Initial:8~20N,ATER TEST 6~20N
 - DURABILITY:10,000CYCLES
- THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CANNOT INDENOENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

MATERIAL NO.:


JK-US1516AGB0096R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ±0.25	X. ±4.0
	.X ±0.20	.X ±3.0
	.XX ±0.15	.XX ±2.0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		ECN DESCRIPTION	
16 Pin USB Type C 沉板上1.48H 外壳		RELEASE TO TOOLING	
4.80L Customer Drawing		DRAWN BY	DATE
		KATE DENG	
CHECKED BY		DATE	
FAND		-----	
APPROVED BY		DATE	
Wang Yan		-----	
DIMENSION STYLE		DESIGN UNITS	SCALE
MM ONLY		METRIC	10:1
		THIRD ANGLE PROJECTION	

frame size: A4
Rev.A 2022.04.09

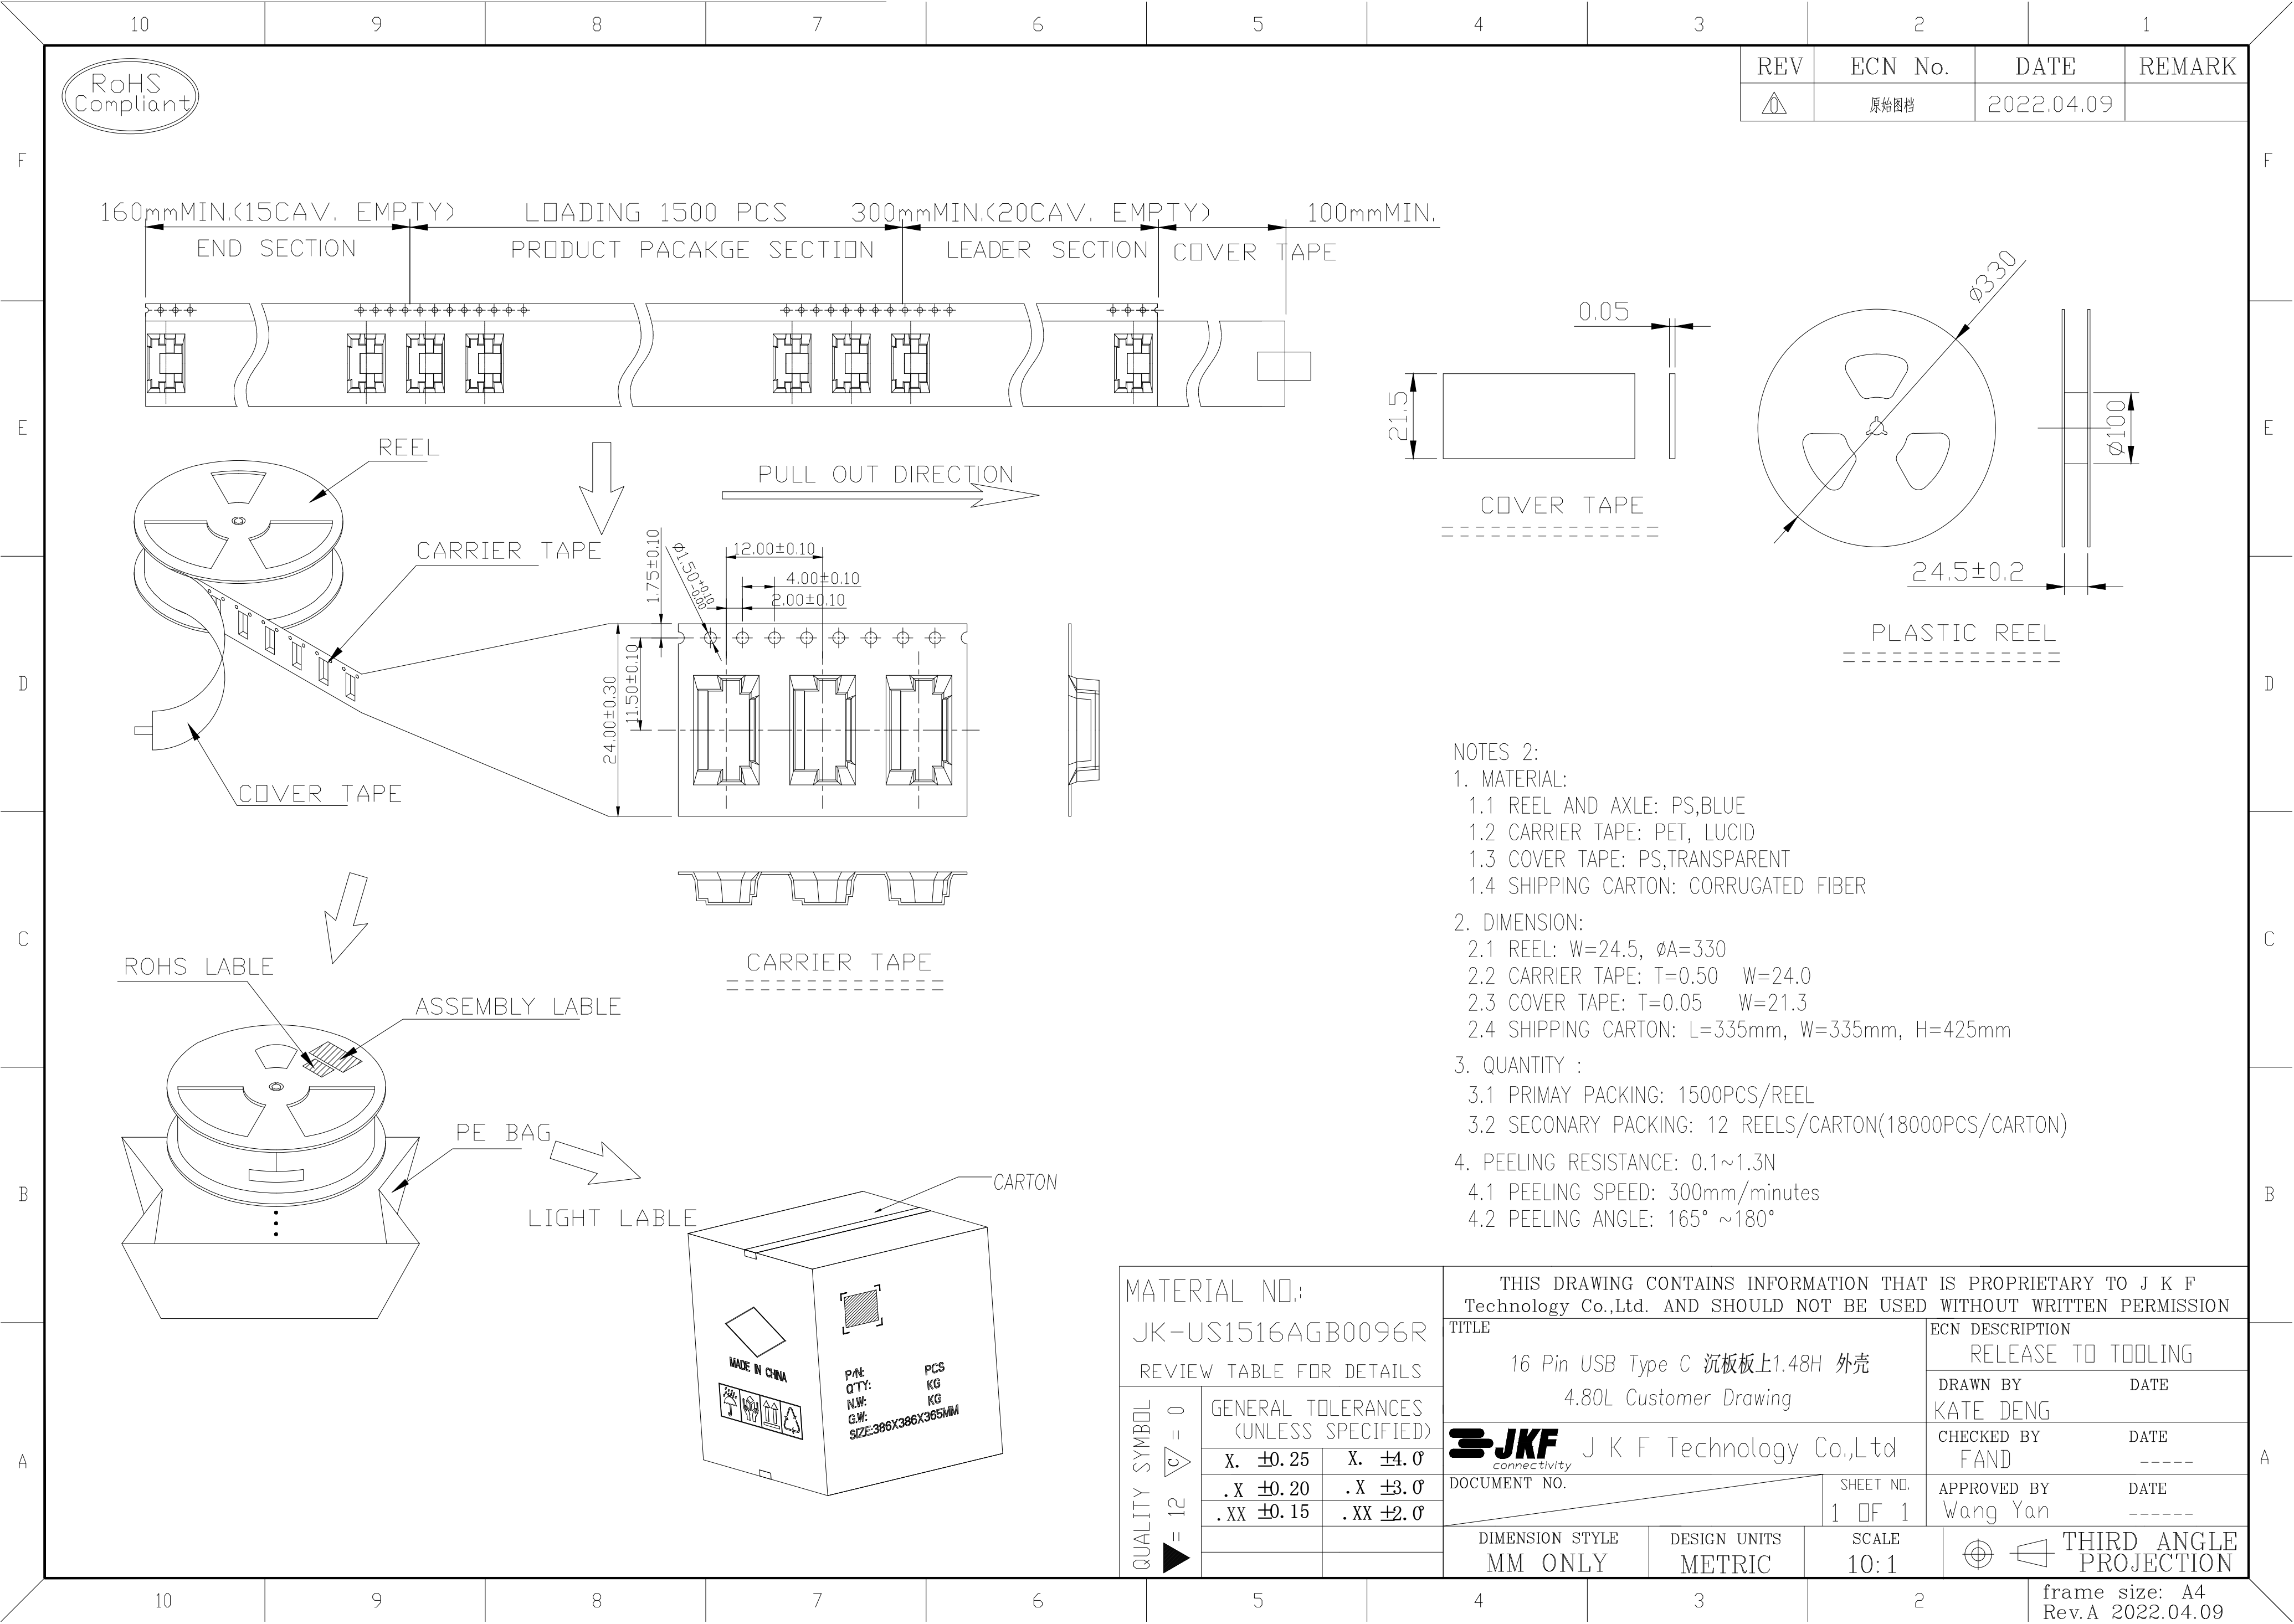

RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

- NOTES 2:
- MATERIAL:
 - 1.1 REEL AND AXLE: PS,BLUE
 - 1.2 CARRIER TAPE: PET, LUCID
 - 1.3 COVER TAPE: PS,TRANSPARENT
 - 1.4 SHIPPING CARTON: CORRUGATED FIBER
 - DIMENSION:
 - 2.1 REEL: W=24.5, $\phi A=330$
 - 2.2 CARRIER TAPE: T=0.50 W=24.0
 - 2.3 COVER TAPE: T=0.05 W=21.3
 - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=425mm
 - QUANTITY :
 - 3.1 PRIMAY PACKING: 1500PCS/REEL
 - 3.2 SECONARY PACKING: 12 REELS/CARTON(18000PCS/CARTON)
 - PEELING RESISTANCE: 0.1~1.3N
 - 4.1 PEELING SPEED: 300mm/minutes
 - 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US1516AGB0096R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		16 Pin USB Type C 沉板板上1.48H 外壳		RELEASE TO TOOLING	
QUALITY SYMBOL = 12 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE
	X. ± 0.25	X. ± 4.0	KATE DENG		
	.X ± 0.20	.X ± 3.0	CHECKED BY		DATE
	.XX ± 0.15	.XX ± 2.0	FAND		-----
		DOCUMENT NO.	SHEET NO.	APPROVED BY	
			1 OF 1	Wang Yan	
		DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
		MM ONLY	METRIC	10:1	

frame size: A4
Rev.A 2022.04.09