


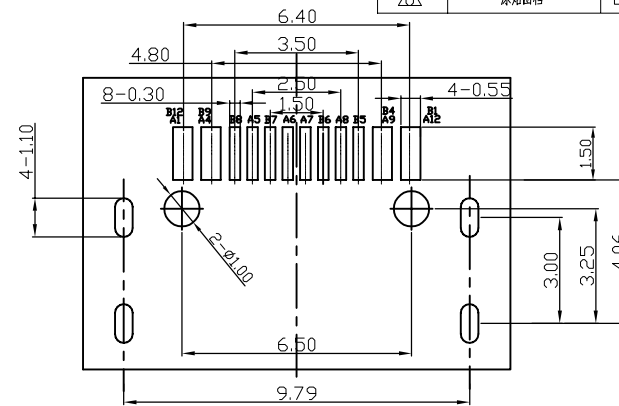
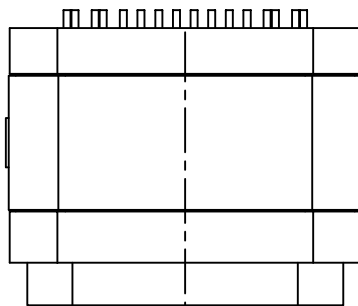

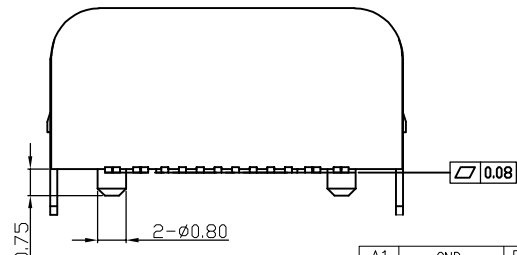




REV	ECN No.	DATE	REMARK
	原始图档	2022.04.09	

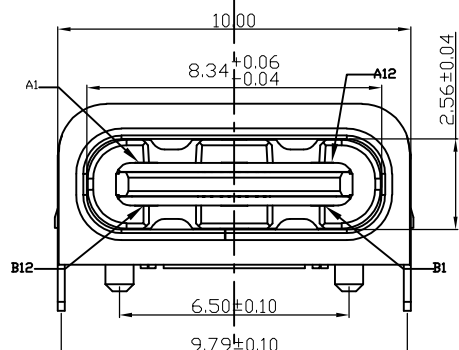

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

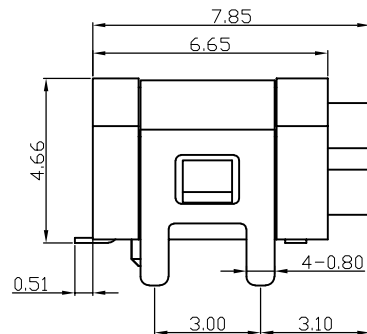


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	OVER SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 6N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

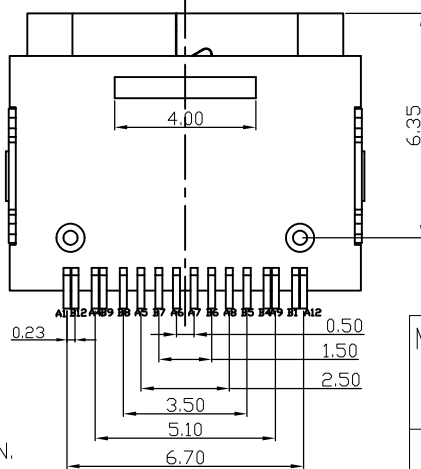

MATERIAL NO.:

JK-US4716AGB0040R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL  = 12  = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	x ± 0.50	x* ± 2*
	.x ± 0.30	.x ± 1*
	.xx ± 0.20	.xx* ± 0.5*
	.xxx ± 0.10	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F
Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE CUSTOMER DRAWING C F 单排16P 防水型 (1PX7) 7.85 母座				ECN DESCRIPTION	
				RELEASE TO TOOLING	
 J K F Technology Co.,Ltd connectivy				DRAWN BY	DATE
				KATE DENG	
				CHECKED BY	DATE
				FAND	----
DOCUMENT NO.				SHEET NO.	APPROVED BY
				1 OF 1	Wang Yan
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC	SCALE 10:1	 THIRD ANGLE PROJECTION	

frame size: A4
Rev.A 2022.04.09