



1.6 EMI片: SUS301, T=0.10mm; 表面镀镍: 30U" MIN

3.1 工作温度: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$

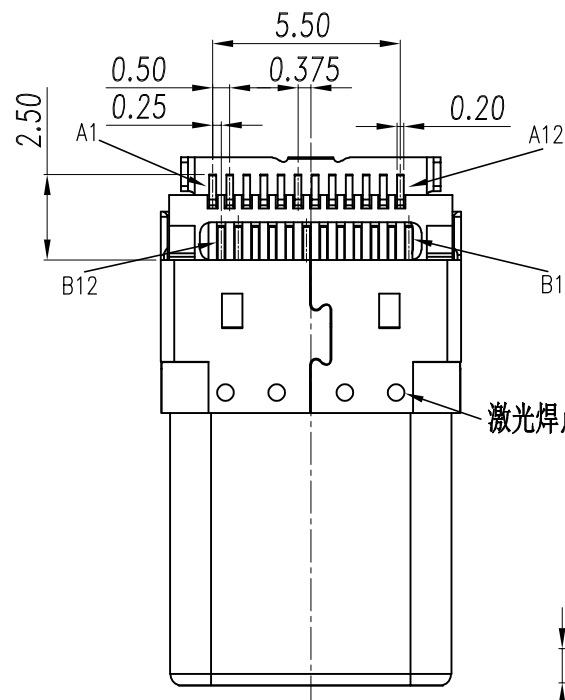

—激光焊点4个

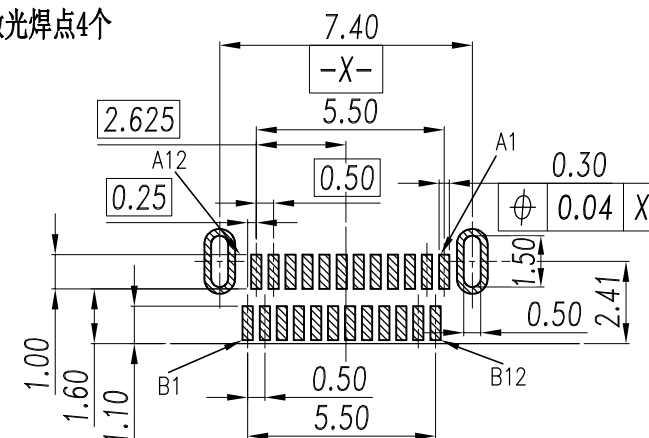

(COMPONENT SIDE))TOLERANCE+0.03mm

GENERAL TOLERANCES		UNIT	mm		
DISTANCE X.		MATERIAL	SEE NOTES		
X.	±0.25	FINISHED	SEE NOTES		
.X	±0.20				
.XX	±0.15	APPROCED	KATE DENG		
.XXX	±0.10				
ANGLE		CHECKED	KATE DENG		
X.	±3.0°	DESIGN	FAND		
.X	±2.0°	DRAWN	Wang Yan		
.XX	±1.0°				



杰康富精密电子有限公司
JKF precision Electronics Co., LTD

A

Frame_A4
Rev.F2013/09/10

