

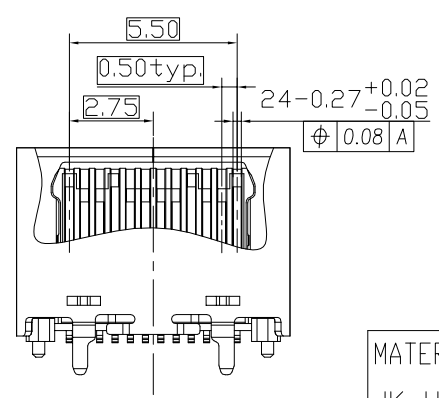
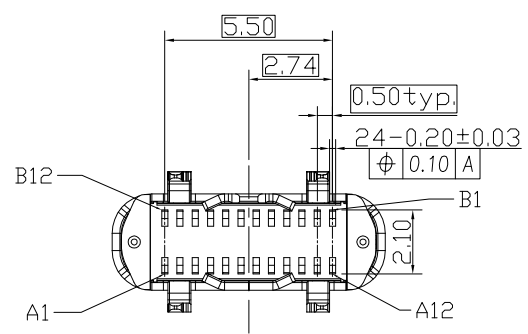
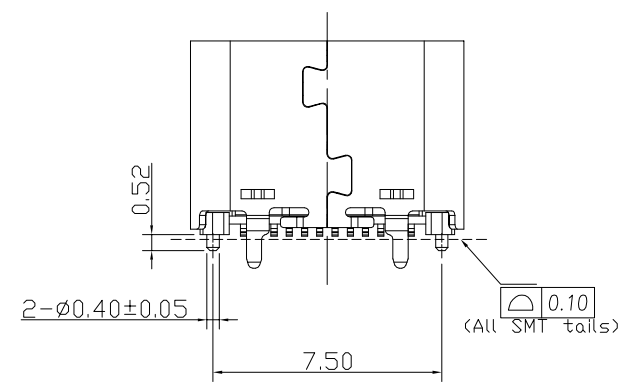
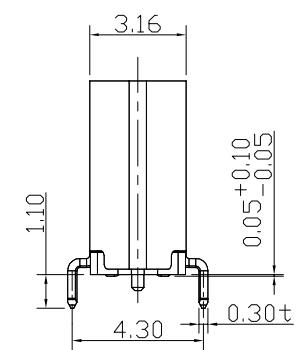
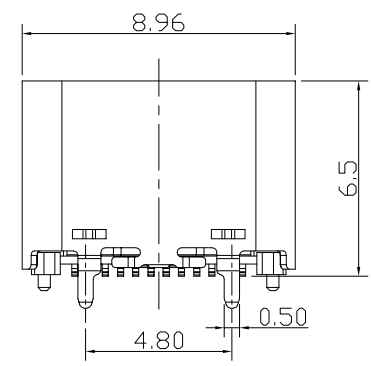




REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
1.1 CURRENT RATING: 5A
1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.
2.MECHANICAL CHARACTERISTICS
2.1 INSERTION FORCE: 5~20N
2.2 EXTRACTION FORCE: Initial:8~20N;
2.3 DURABILITY:10,000CYCLES
3.THE SHELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.AS SUCH IS CONNOT INDENDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.





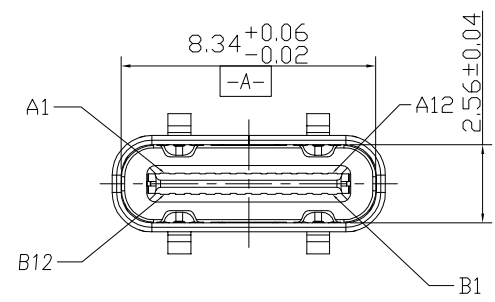


MATERIAL NO.:		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
JK-US6524AGB00102R		TITLE		ECN DESCRIPTION	
REVIEW TABLE FOR DETAILS		24 Pin USB Type C 直立板上6.50H Customer Drawing		RELEASE TO TOOLING	
QUALITY SYMBOL ▽ = 0 ▽ = 12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE
	X. ±0.25 X. ±4.0		KATE DENG		
	.X ±0.20 .X ±3.0		CHECKED BY		DATE
	.XX ±0.15 .XX ±2.0		FAND		-----
		DOCUMENT NO.		APPROVED BY	
				Wang Yan	
		SHEET NO.		DATE	
		1 OF 1		-----	
		SCALE		THIRD ANGLE PROJECTION	
		10:1			
		DIMENSION STYLE			
		MM ONLY			
		DESIGN UNITS			
		METRIC			




REV	ECN No.	DATE	REMARK
△	原始圖檔	2022.04.09	

ASSEMBLY CAP

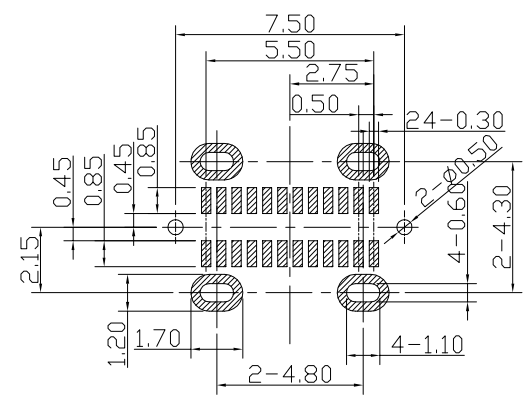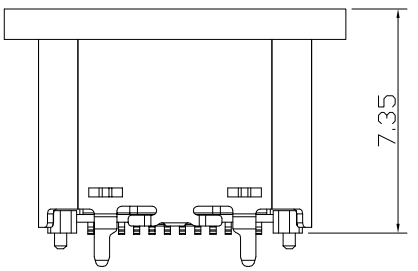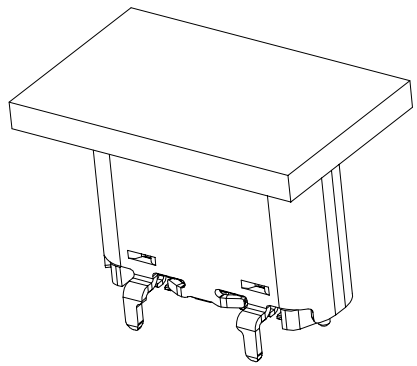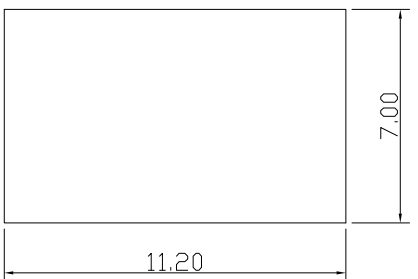

P.C.B LAYOUT VIEW
TOLERANCE ±0.05

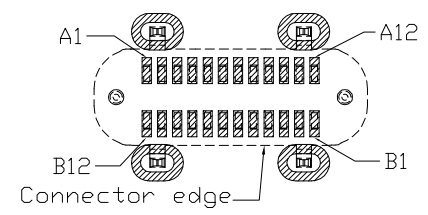

PIN ASSIGNMENT													
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	BLADE	SHELL
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

6	CAP	1 PCS	PLASTIC	UL94V-0
5	MID PLATE	1 PCS	STAINLESS STEEL	None
4	CONTACT 2	1 SET	COPPER ALLOY	CONTACT AREA : Au 1u" Min., Ni 30~80u"
3	CONTACT 1	1 SET	COPPER ALLOY	SOLDER AREA : Matte Tin 50u" Min., Ni 30~80u"
2	HOUSING	1 PCS	PLASTIC	UL94V-0
1	SHELL	1 PCS	STAINLESS STEEL	Ni 50~100u"
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

MATERIAL NO.:

JK-US6524AGB00102R-1

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
	X. ±0.25 X. ±4.0°
	.X ±0.20 .X ±3.0°
	.XX ±0.15 .XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: 24 Pin USB Type C 直立板上6.50H Customer Drawing

ECN DESCRIPTION: RELEASE TO TOOLING

DRAWN BY: KATE DENG DATE: _____

CHECKED BY: FAND DATE: _____

APPROVED BY: Wang Yan DATE: _____

THIRD ANGLE PROJECTION

DOCUMENT NO.





SHEET NO. 1 OF 1

DIMENSION STYLE: MM ONLY

DESIGN UNITS: METRIC

SCALE: 10:1

160mmMIN.(15CAV. EMPTY) LOADING 880PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

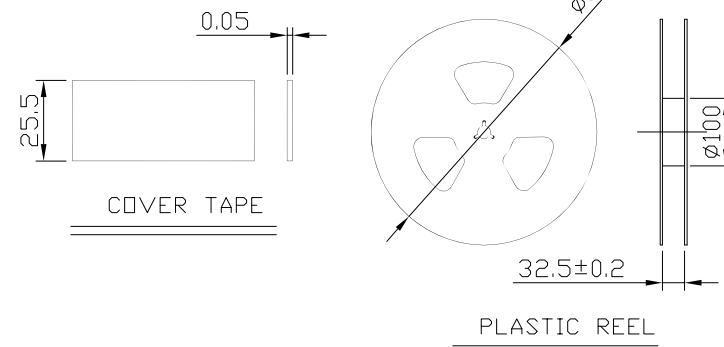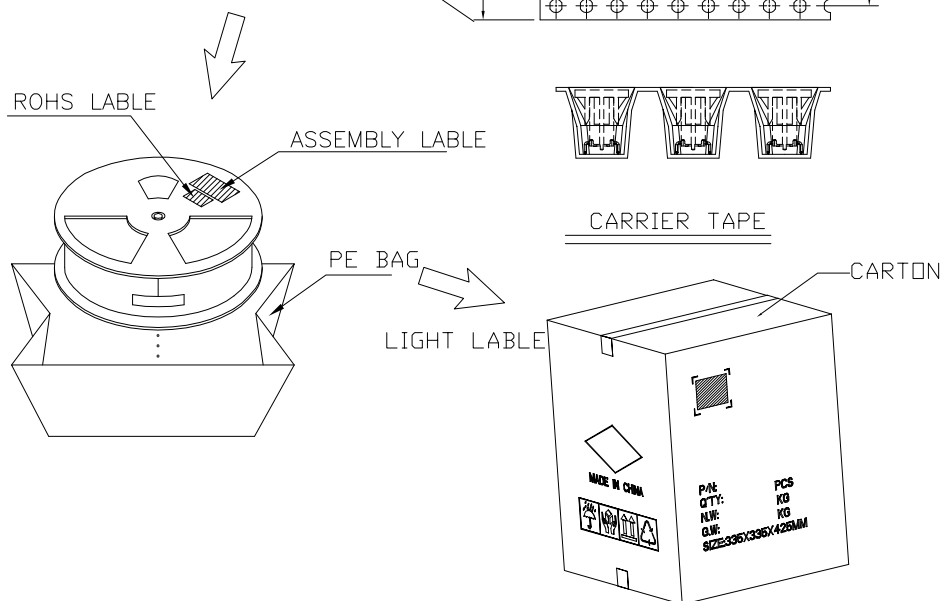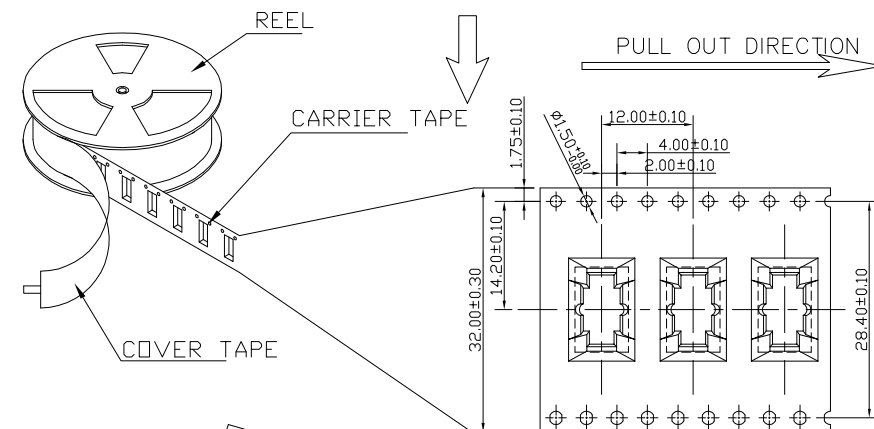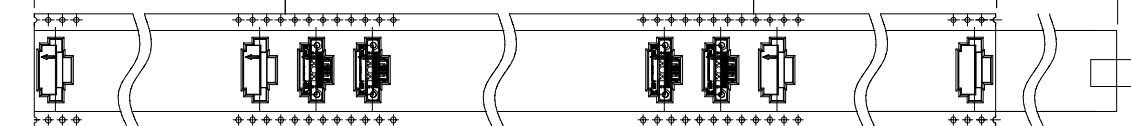

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=32.5, $\phi A=380$
- 2.2 CARRIER TAPE: T=0.50 W=32.0
- 2.3 COVER TAPE: T=0.05 W=25.5
- 2.4 SHIPPING CARTON: L=386mm, W=386mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 880PCS/REEL
- 3.2 SECDNARY PACKING: 10 REELS/CARTON(8800PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

MATERIAL NO.:

JK-US6524AGB00102R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X. ± 0.25	X. ± 0.4
	.X ± 0.20	.X ± 0.3
	.XX ± 0.15	.XX ± 0.2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
24 Pin USB Type C 直立板上6.50H		RELEASE TO TOOLING	
Customer Drawing		DRAWN BY	DATE
		KATE DENG	
		CHECKED BY	DATE
		FAND	----
DOCUMENT NO.		APPROVED BY	DATE
		Wang Yan	----
DIMENSION STYLE		DESIGN UNITS	SCALE
MM ONLY		METRIC	10:1
			THIRD ANGLE PROJECTION