

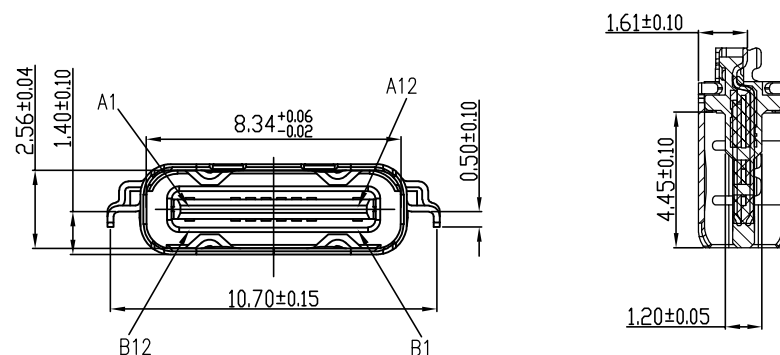
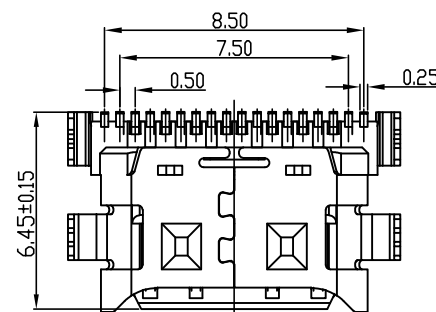
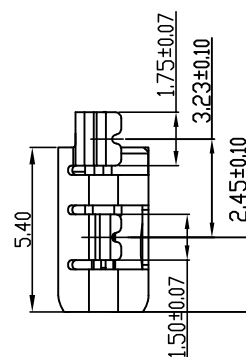
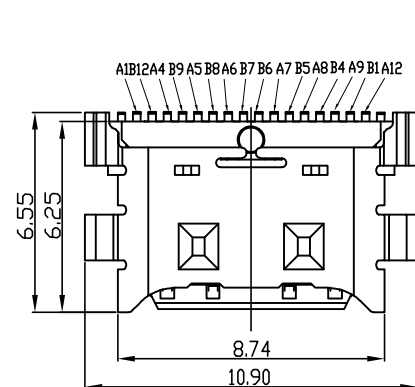
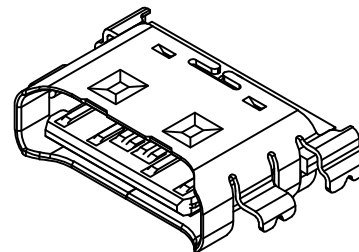


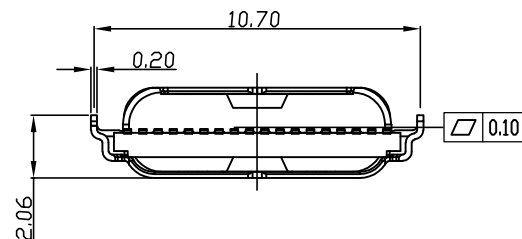

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

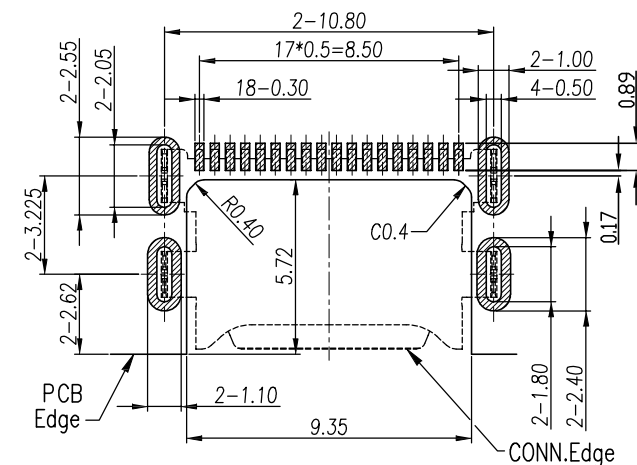


RECOMMENDED PCB LAYOUT
PCP TOLFRANCE 1005


GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL	SEE NOTES		
	X. ±0.25	FINISHED	SEE NOTES		
	.X ±0.20	APPROCED	KATE DENG		
	.XX ±0.15	CHECKED	KATE DENG		
	.XXX ±0.10	DESIGN	FAND		
ANGLE		DRAWN	Wang Yan		
	X. ±3.0°				
	.X ±2.0°				
	.XX ±1.0°				

		杰 康 富 精 密 电 子 有 限 公 司 <i>J K F precision Electronics Co., LTD</i>				
TITLE:		TYPE C/F 18PIN 沉板1.4mm 全插型				
PART NO.		JK-US3016AGB0163R				
DRAWING NO.		TC019-A				
SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

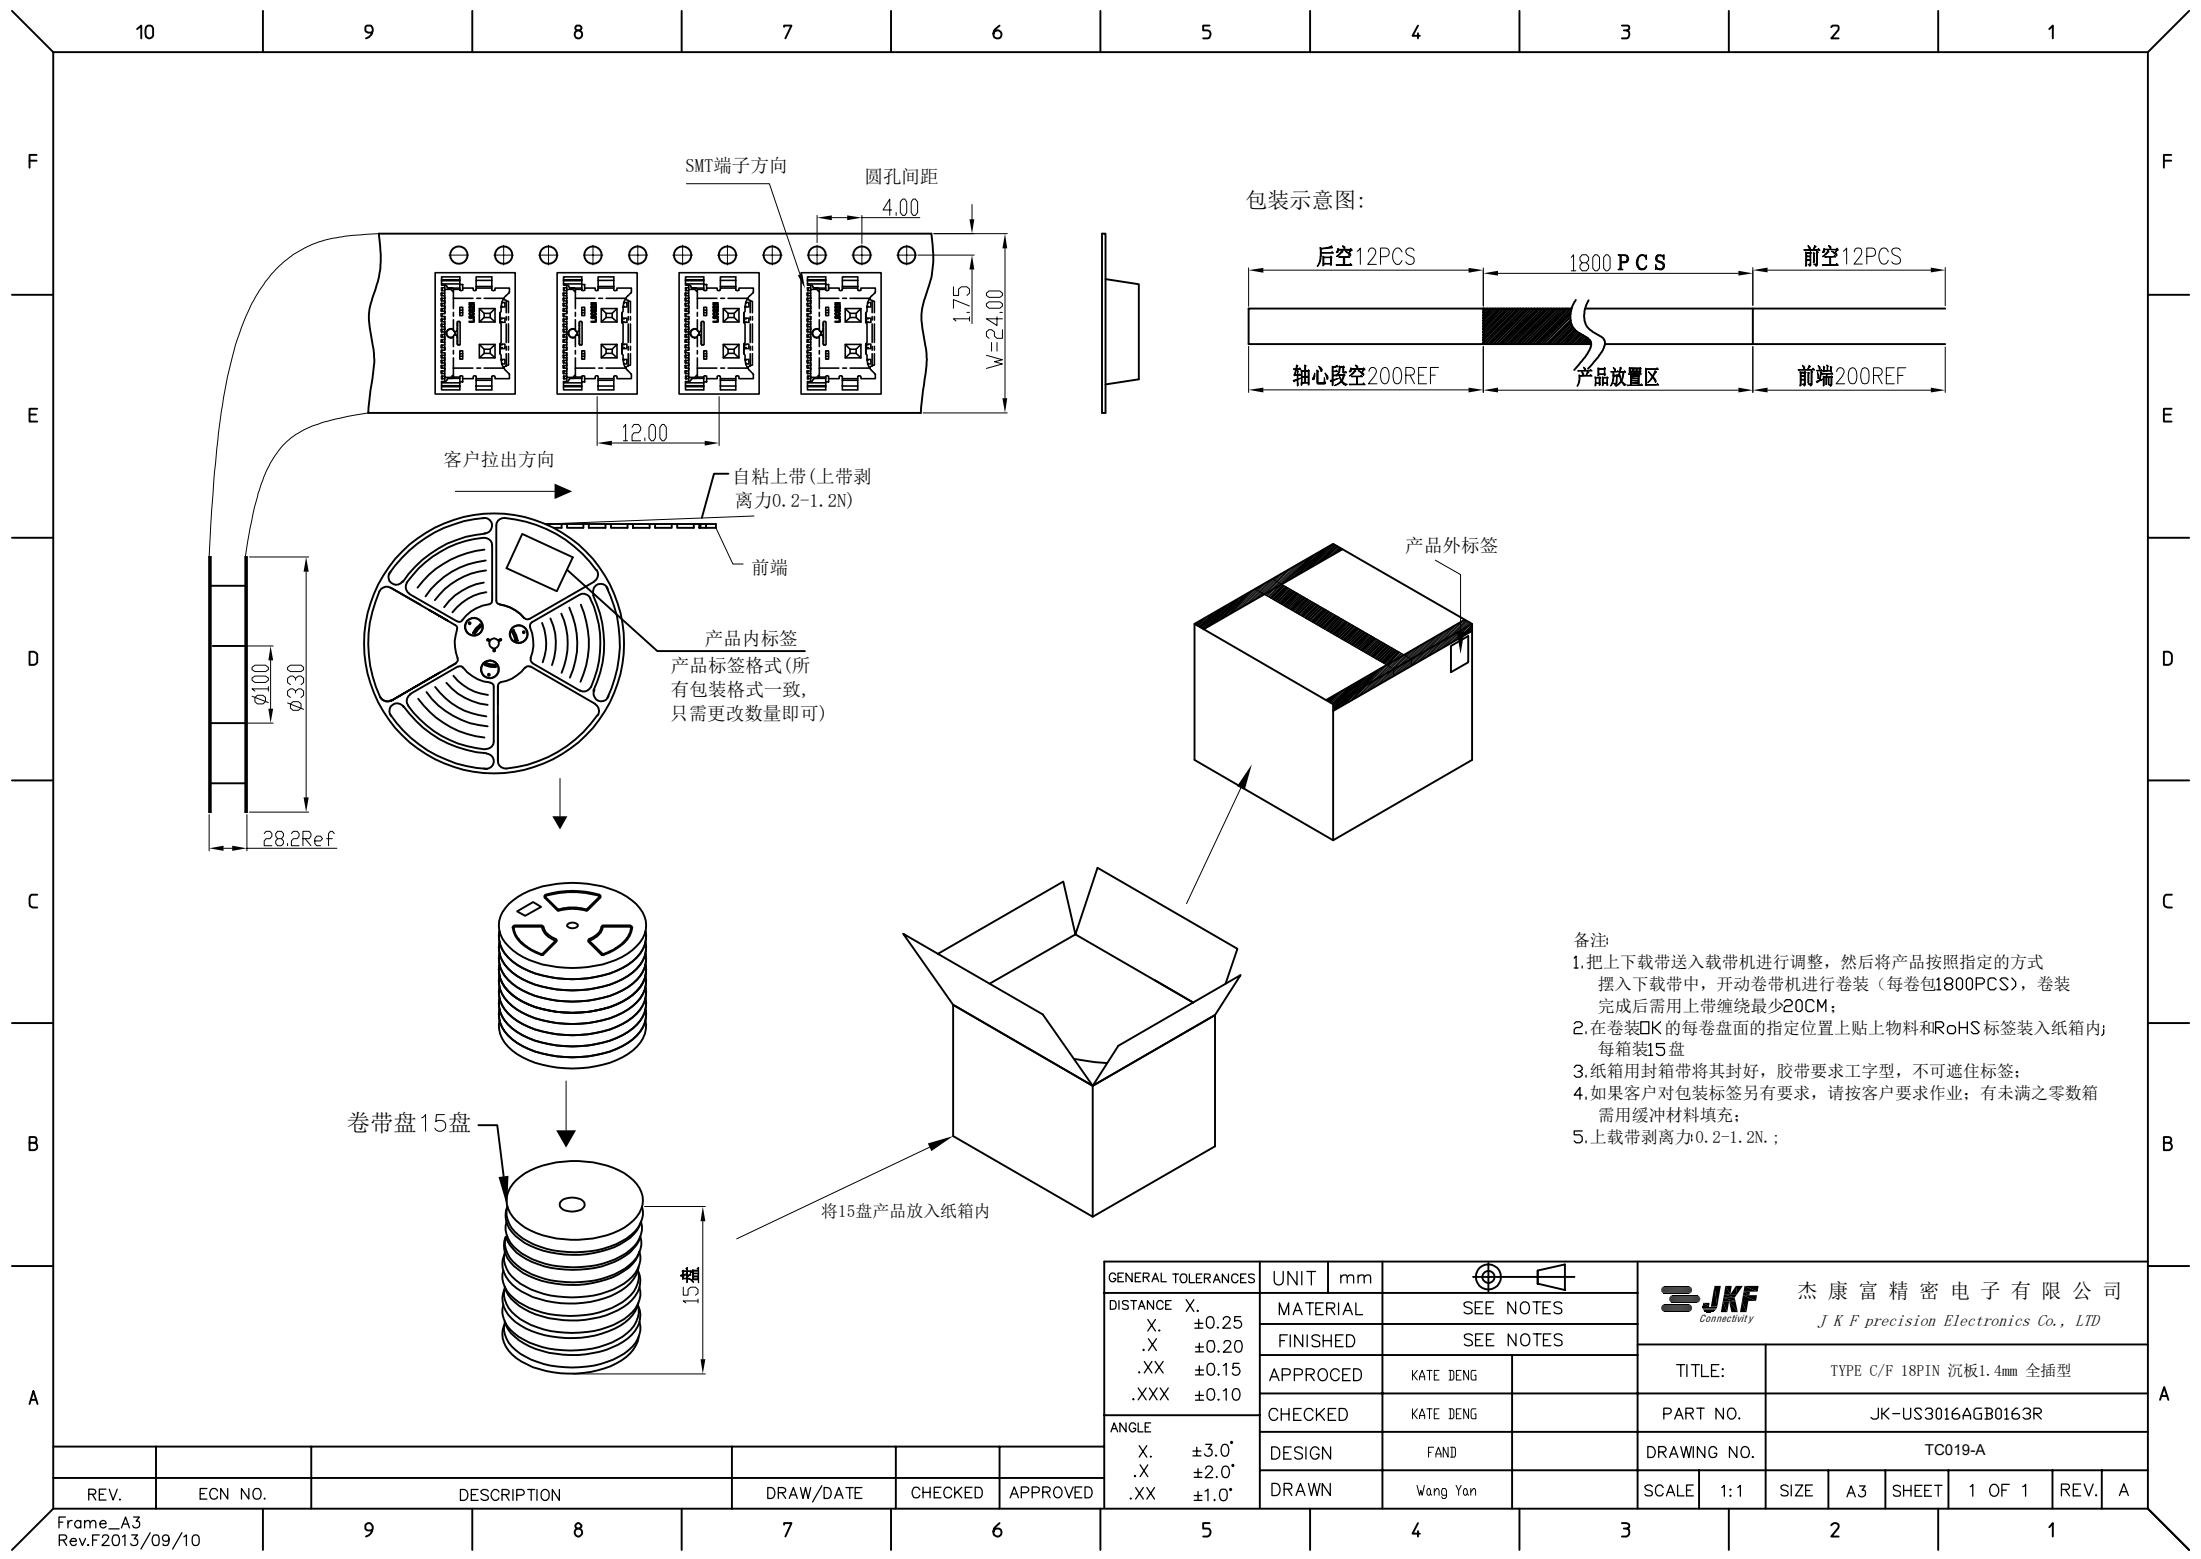

包装示意图:

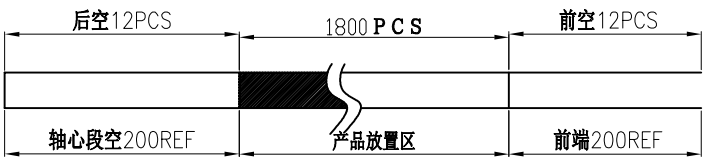

- 备注:
- 1.把上下载带送入载带机进行调整,然后将产品按照指定的方式摆入下载带中,开动卷带机进行卷装(每卷包1800PCS),卷装完成后需用上带缠绕最少20CM;
 - 2.在卷装OK的每卷盘面的指定位置上贴上物料和RoHS标签装入纸箱内;每箱装15盘
 - 3.纸箱用封箱带将其封好,胶带要求工字型,不可遮住标签;
 - 4.如果客户对包装标签另有要求,请按客户要求作业;有未满之零数箱需用缓冲材料填充;
 - 5.上载带剥离力0.2-1.2N.;

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	±0.25		SEE NOTES	
	.X	±0.20		SEE NOTES	
	.XX	±0.15		APPROCED	KATE DENG
	.XXX	±0.10		CHECKED	KATE DENG
ANGLE	X.	±3.0°		DESIGN	FAND
	.X	±2.0°		DRAWN	Wang Yan
	.XX	±1.0°			

杰康富精密电子有限公司	
J K F precision Electronics Co., LTD	
TITLE:	TYPE C/F 18PIN 沉板1.4mm 全插型
PART NO.	JK-US3016AGB0163R
DRAWING NO.	TC019-A
SCALE	1:1
SIZE	A3
SHEET	1 OF 1
REV.	A