

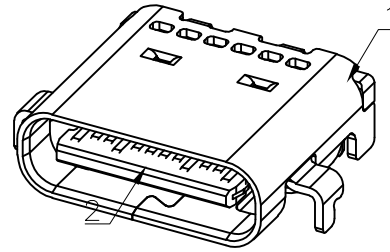
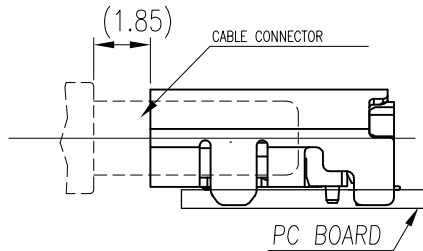
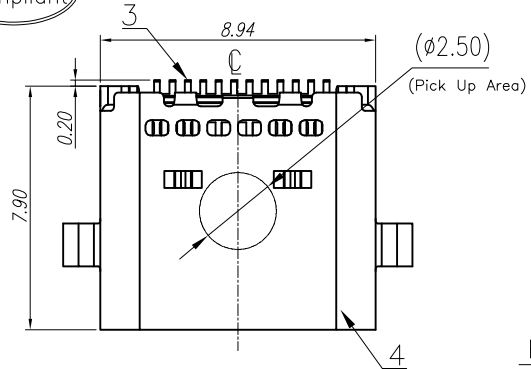


RoHS
Compliant



REV	ECN No.	DATE	REMARK
△	原始图档	2024.04.09	

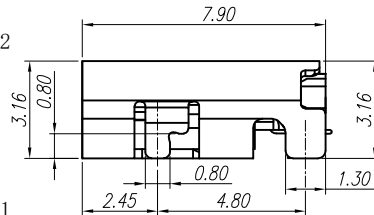



RECESSED MOUNTING CONFIGURATION

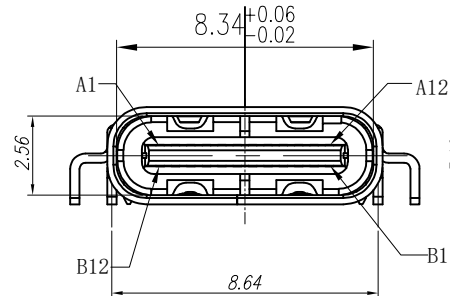

0.10

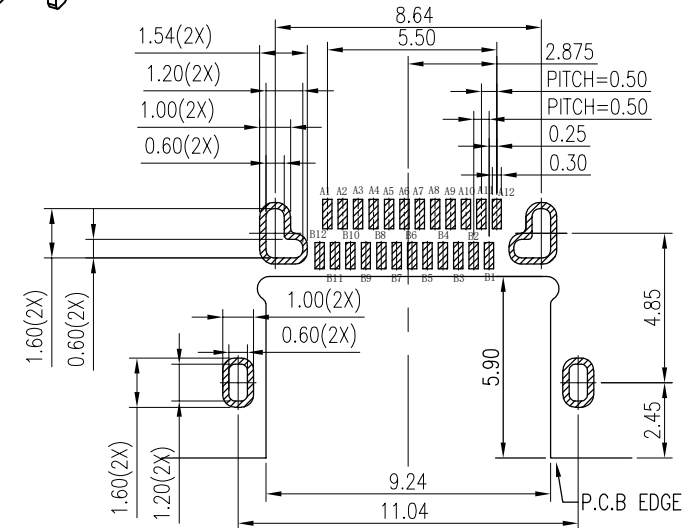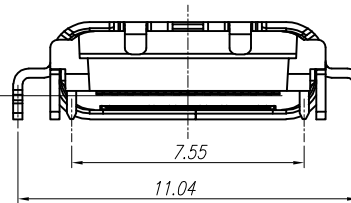

RECOMMENDED PCB LAYOUT(TOP VIEW) THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05

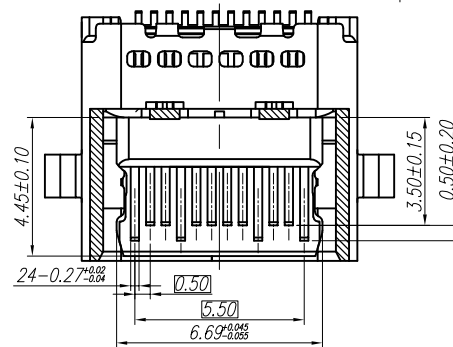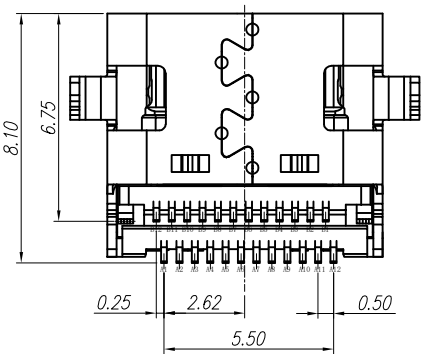

PIN ASSIGNMENT

Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

MATERIAL NO.:

JK-US3224AGB00179R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
▽ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

X.	±0.25	X.	±4.0
.X	±0.20	.X	±3.0
.XX	±0.15	.XX	±2.0

4	Shielding plate	1	SUS 301	Ni underplating overall, Gold Flash plating on the solder tail.
3	Contact	24	C18400	Ni underplating overall, Au plating on the contact area, Gold Flash plating on the solder tail.
2	IM	1	LCP	UL94V-0, Black/White
1	Shell	1	SUS 304	Ni plating overall
Item	Description	QTY.	Material	Finish

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE		ECN DESCRIPTION	
USB TYPE C 24PIN双排SMT 沉板0.80mmCONN		RELEASE TO TOOLING	
DRAWN BY KATE DENG		DATE	
CHECKED BY FAND		DATE	
APPROVED BY Wang Yan		DATE	
DOCUMENT NO.		SHEET NO. 1 OF 1	
DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC	
SCALE 10:1		THIRD ANGLE PROJECTION	




frame size: A4
Rev.A 2022.04.09





REV	ECN No.	DATE	REMARK
△	原始图档	2024.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 1400 PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.

END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

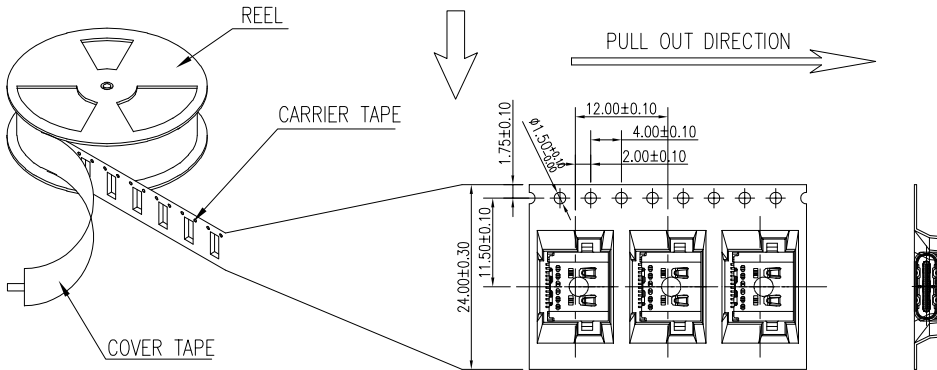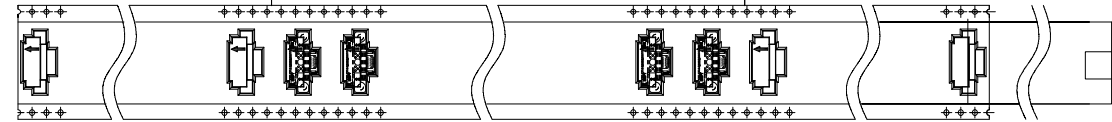

CARRIER TAPE

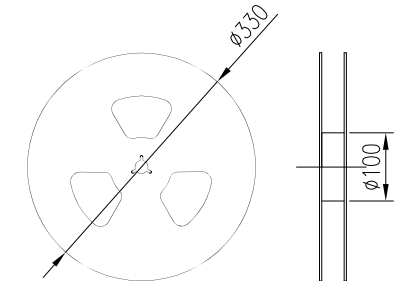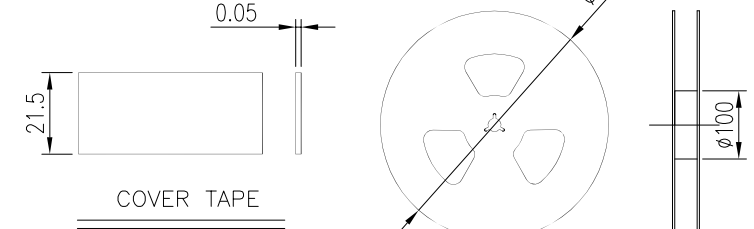

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:



- 2.1 REEL: W=24.5, $\phi A=330$
- 2.2 CARRIER TAPE: T=0.30 W=24.0
- 2.3 COVER TAPE: T=0.05 W=21.5
- 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 1400 PCS/REEL
- 3.2 SECONARY PACKING: 12 REELS/CARTON(16800 PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

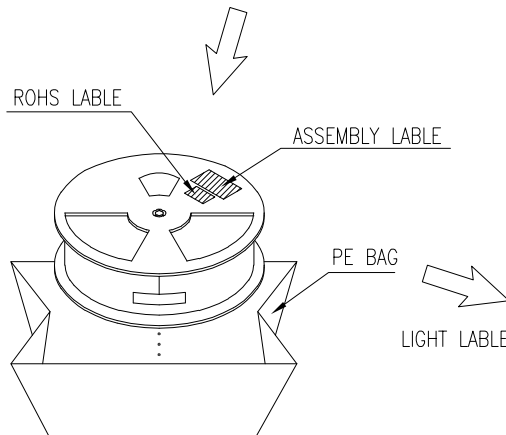

CARTON

MATERIAL NO.:
JK-US3224AGB00179R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla = 0$	X. ± 0.25 X. ± 0.4
$\nabla = 12$	.X ± 0.20 .X ± 0.3
	.XX ± 0.15 .XX ± 0.2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			TITLE		ECN DESCRIPTION	
USB TYPE C 24PIN双排SMT 沉板0.80mm CONN			RELEASE TO TOOLING		DRAWN BY DATE	
J K F Technology Co.,Ltd			KATE DENG		CHECKED BY DATE	
DOCUMENT NO.			FAND		APPROVED BY DATE	
SCALE			1 OF 1		Wang Yan	
DIMENSION STYLE		DESIGN UNITS	SCALE		THIRD ANGLE PROJECTION	
MM ONLY		METRIC	10:1			

frame size: A4
Rev.A 2022.04.09