



REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

SPECIFICATION:








1.ELECTRICAL CHARACTERISTICS:

- 1.1 CURRENT RATING: 5A
- 1.2 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 1.3 CONTACT RESISTANCE: 30 MILLIONHM MAX.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.5 INSULATION RESISTNACE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial:8~20N ATER TEST 6~20N;
- 2.3 DURABILITY:10,000CYCLES

3.THE SELL LENTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD,AS SUCH IS CONNOT INDENDENTLY BE GUARANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.

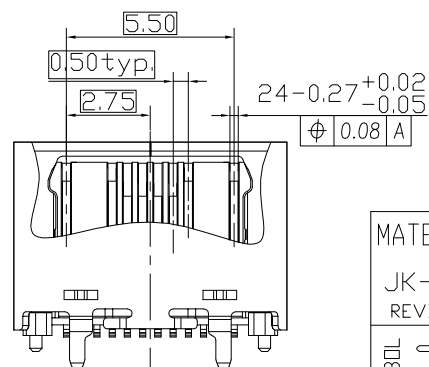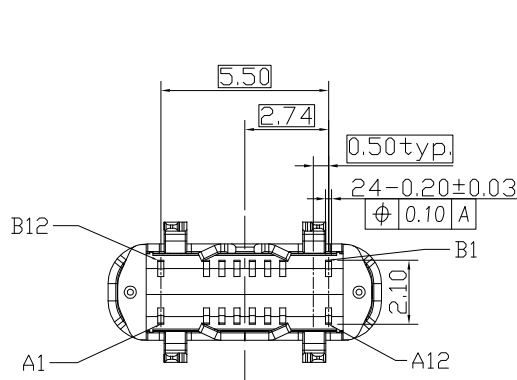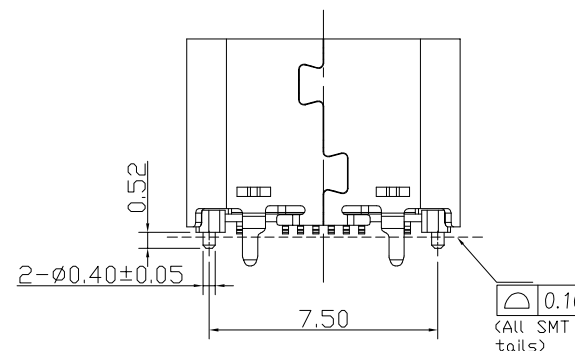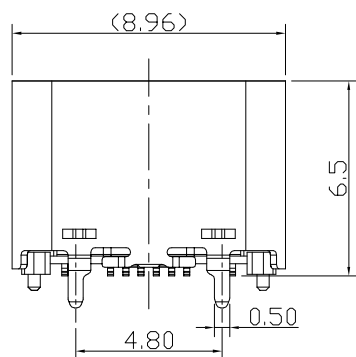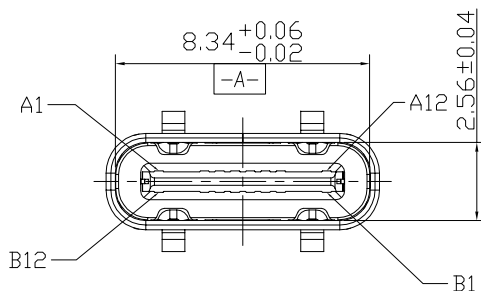

MATERIAL NO.:

JK-US6516AGB00114R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
▽ = 0
= 12
▽ = 0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

R	TITLE	ECN DESCRIPTION
	16 Pin USB Type C 直立板上6.50H	RELEASE TO TOOLING
	Customer Drawing	DRAWN BY DATE
		KATE DENG

JKF J K F Technology Co.,Ltd

DOCUMENT NO.	SHEET NO.	CHECKED BY	DATE
	1 OF 1	FAND	-----
		APPROVED BY	DATE
		Wang Yan	-----

DIMENSION STYLE	DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
MM ONLY	METRIC	10:1	

frame size: A4
Rev.A 2022.04.09

10

9

8

7

6

5

4

3







2

1

RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

ASSEMBLY CAP

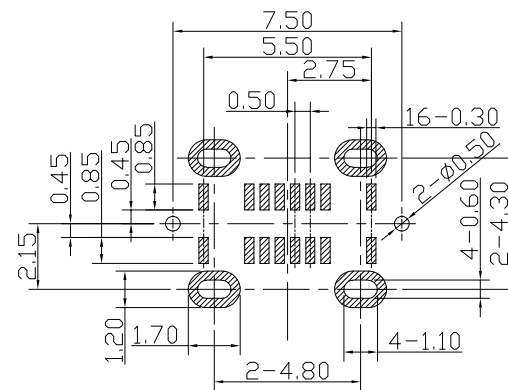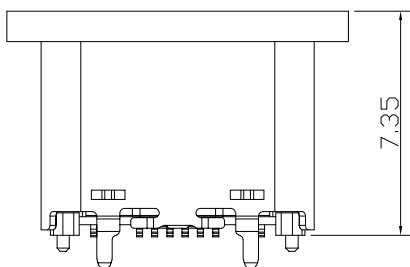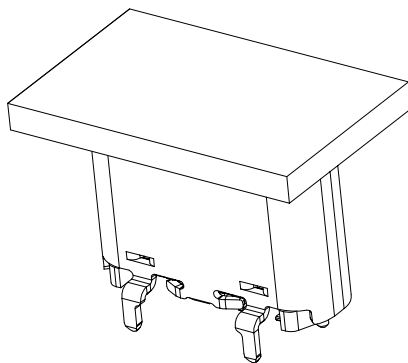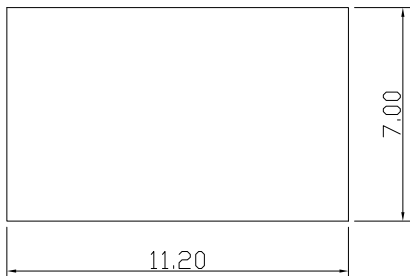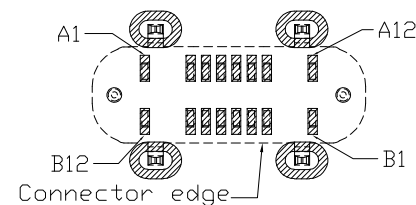P.C.B LAYOUT VIEW
TOLERANCE ±0.05

6	CAP	1 PCS	PLASTIC	UL94V-0
5	MID PLATE	1 PCS	STAINLESS STEEL	None
4	CONTACT 2	1 SET	COPPER ALLOY	CONTACT AREA : Au 1u" Min., Ni 30~80u" SOLDER AREA : Matte Tin 50u" Min., Ni 30~80u"
3	CONTACT 1	1 SET	COPPER ALLOY	
2	HOUSING	1 PCS	PLASTIC	UL94V-0
1	SHELL	1 PCS	STAINLESS STEEL	Ni 50~100u"
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND	GND	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

MATERIAL NO.:

JK-US6516AGB00114R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
= 12
= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE

16 Pin USB Type C 直立板上6.50H
Customer Drawing

J K F Technology Co.,Ltd

DOCUMENT NO.

DIMENSION STYLE
MM ONLYDESIGN UNITS
METRICSHEET NO.
1 OF 1SCALE
10:1

ECN DESCRIPTION

RELEASE TO TOOLING

DRAWN BY

DATE

KATE DENG

CHECKED BY

DATE

FAND

APPROVED BY

DATE




Wang Yan

THIRD ANGLE
PROJECTIONframe size: A4
Rev.A 2022.04.09

RoHS
Compliant

REV	ECN No.	DATE	REMARK
△	原始图档	2022.04.09	

160mmMIN.(15CAV. EMPTY) LOADING 880PCS 300mmMIN.(20CAV. EMPTY) 100mmMIN.
END SECTION PRODUCT PACAKGE SECTION LEADER SECTION COVER TAPE

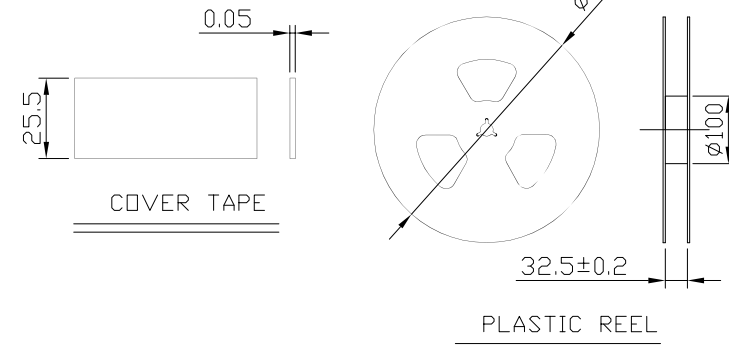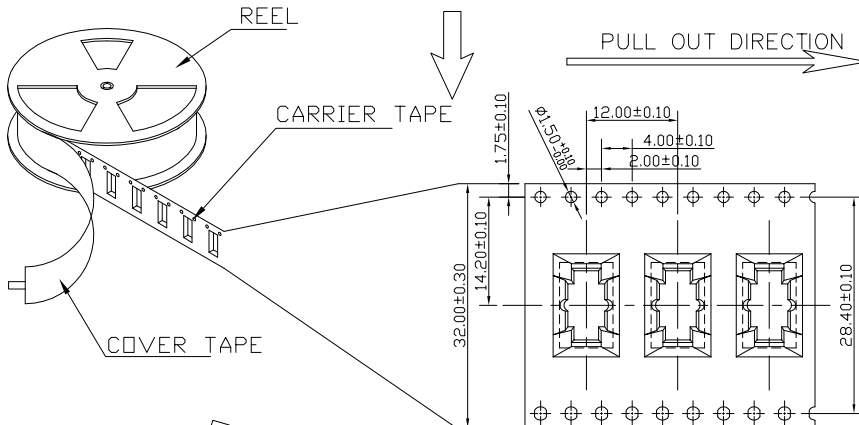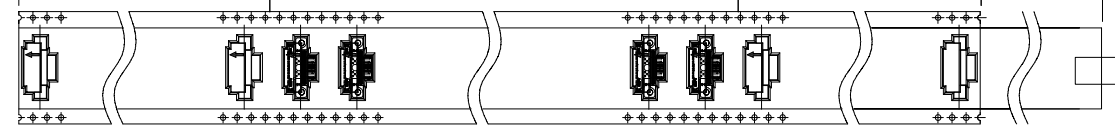

NOTES 2:

1. MATERIAL:

- 1.1 REEL AND AXLE: PS,BLUE
- 1.2 CARRIER TAPE: PET, LUCID
- 1.3 COVER TAPE: PS,TRANSPARENT
- 1.4 SHIPPING CARTON: CORRUGATED FIBER

2. DIMENSION:

- 2.1 REEL: W=32.5, $\phi A=380$
- 2.2 CARRIER TAPE: T=0.50 W=32.0
- 2.3 COVER TAPE: T=0.05 W=25.5
- 2.4 SHIPPING CARTON: L=386mm, W=386mm, H=425mm

3. QUANTITY :

- 3.1 PRIMAY PACKING: 880PCS/REEL
- 3.2 SECDNARY PACKING: 10 REELS/CARTON(8800PCS/CARTON)

4. PEELING RESISTANCE: 0.1~1.3N

- 4.1 PEELING SPEED: 300mm/minutes
- 4.2 PEELING ANGLE: 165° ~180°

ROHS LABEL

ASSEMBLY LABEL

PE BAG

LIGHT LABEL

CARRIER TAPE

CARTON

MATERIAL NO.:

JK-US6516AGB00114R

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla = 0$	X. ± 0.25 X. ± 0.4
$\nabla = 12$	.X ± 0.20 .X ± 0.3
	.XX ± 0.15 .XX ± 0.2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE		ECN DESCRIPTION
16 Pin USB Type C 直立板上6.50H Customer Drawing		RELEASE TO TOOLING
 J K F Technology Co.,Ltd		DRAWN BY DATE
		KATE DENG
DOCUMENT NO.		CHECKED BY DATE
		FAND
DIMENSION STYLE MM ONLY		APPROVED BY DATE
		Wang Yan
DESIGN UNITS METRIC	SCALE 10:1	THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09