



F

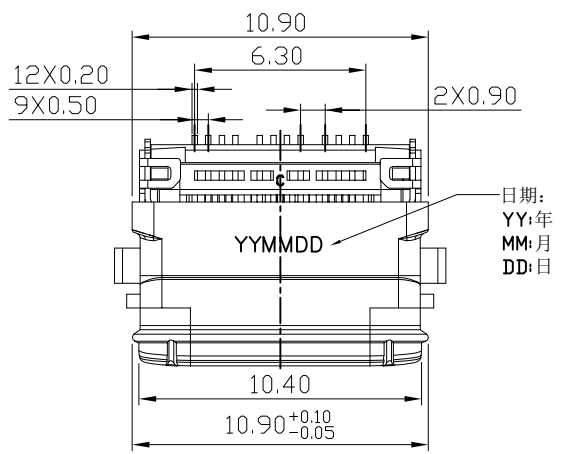




日期:
YY:年
MM:月
DD:日

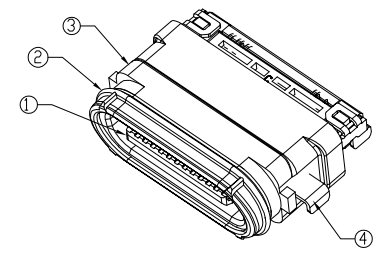

E

F


D

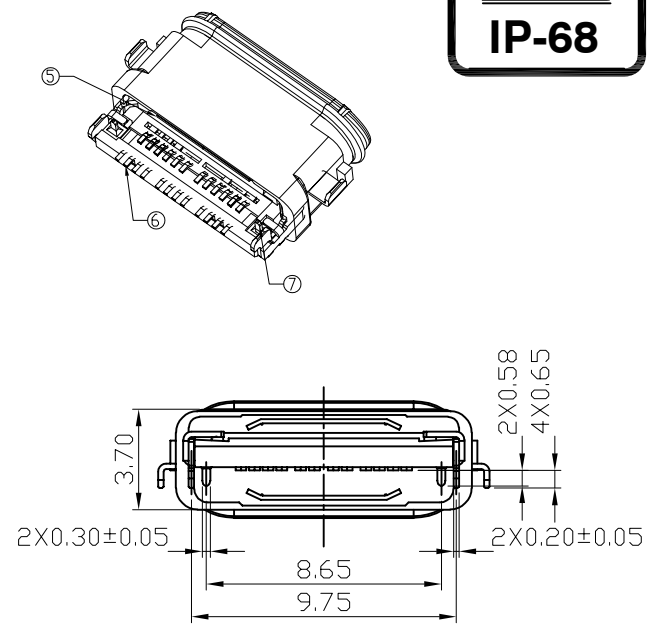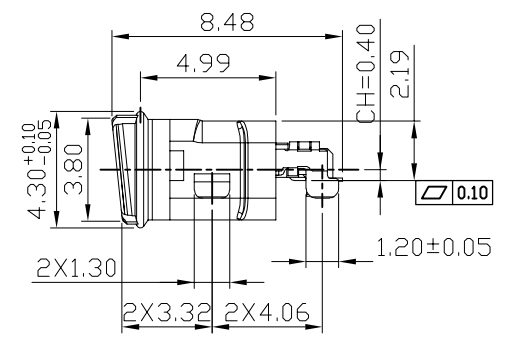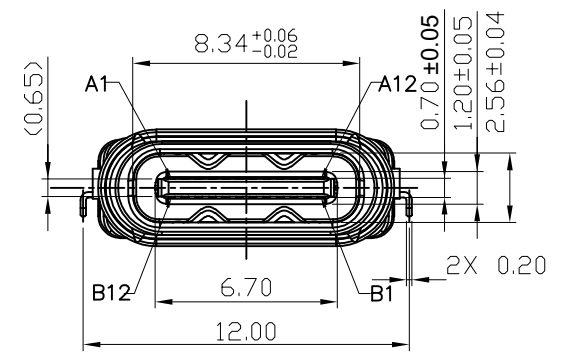

C

D

B

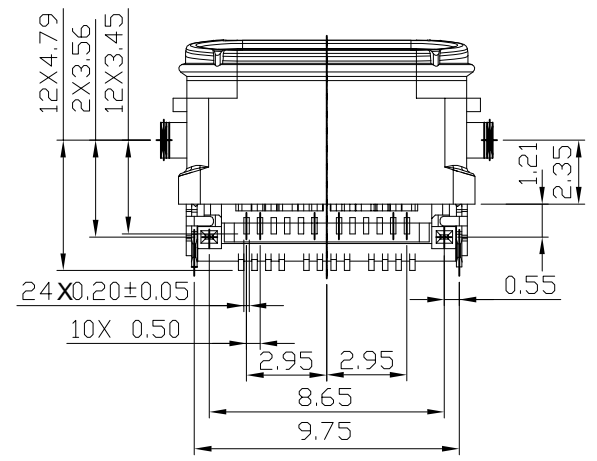

7	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
6	TERMINAL	1	C18400	MATING SIDE:AU15U"; SOLDER TAIL:GOLD FLASH, 50u" NICKEL OVERALL.
5	SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	SOLDER PIN	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
3	SHELL HOUSING	1	High-TEMP. PLASTIC	BLACK
2	LIM	1	SILICA GEL	BLACK
1	MAIN HOUSING	1	High-TEMP. PLASTIC	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH

BILL OF MATERIAL


GENERAL TOLERANCES		UNIT	mm	DIE OF MATERIAL	
DISTANCE X.	X. ±0.25	MATERIAL		杰康富精密电子有限公司 J K F precision Electronics Co., LTD	
	.X ±0.20	FINISHED			
	.XX ±0.15	APPROCED			
	.XXX ±0.10	KATE DENG		TITLE:	TYPE C/F 24PIN 防水IP68沉板双贴斜口CH0.4
		CHECKED	KATE DENG		PART NO.
ANGLE	X. ±3.0°	DESIGN	FAND	DRAWING NO.	
	.X ±2.0°				
	.XX ±1.0°	DRAWN	Wang Yan	SCALE	1:1
				SIZE	A3
				SHEET	1 OF 1
				REV.	A

A

B

A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------


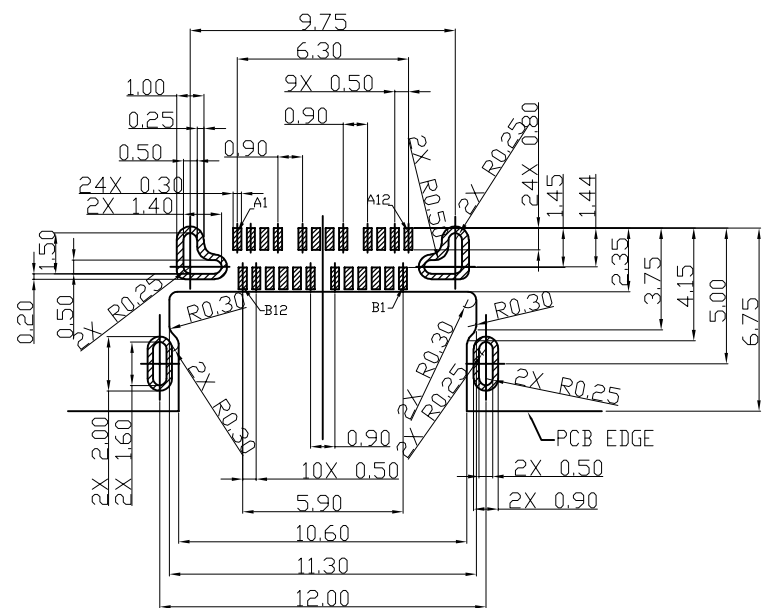


SECTION A-A
PANEL CUT-OUT REFERENCE

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

1. 材料：见材料清单
2. 通用特性：
 - 2.1 共面度：0.10 Max.
 - 2.2 额定电流：5A
 - 2.3 接触电阻：40 Ω Min/ 绝缘电阻：100M Ω Min
 - 2.4 耐电压：100伏交流
 - 2.5 力学特性：初始插入力：5~20N 拔出力：8~20N
- 2.6 耐久后拔出力：6~20N
- 2.7 耐久性：10000次
3. 防水等级 IPX8

GENERAL TOLERANCES		UNIT	mm			 杰康富精密电子有限公司 <i>J K F precision Electronics Co., LTD</i>							
DISTANCE X.		MATERIAL		SEE NOTES									
X. ±0.25		FINISHED		SEE NOTES		TITLE:TYPE C/F 24PIN 防水IP68沉板双贴斜口CH0.4							
.X ±0.20		APPROCED		KATE DENG									
.XX ±0.15		CHECKED		KATE DENG		PART NO. JK-US3724AGB0043R							
.XXX ±0.10		DESIGN		FAND		DRAWING NO.							
ANGLE		DRAWN		Wang Yan		SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A
X. ±3.0°													
.X ±2.0°													
.XX ±1.0°													

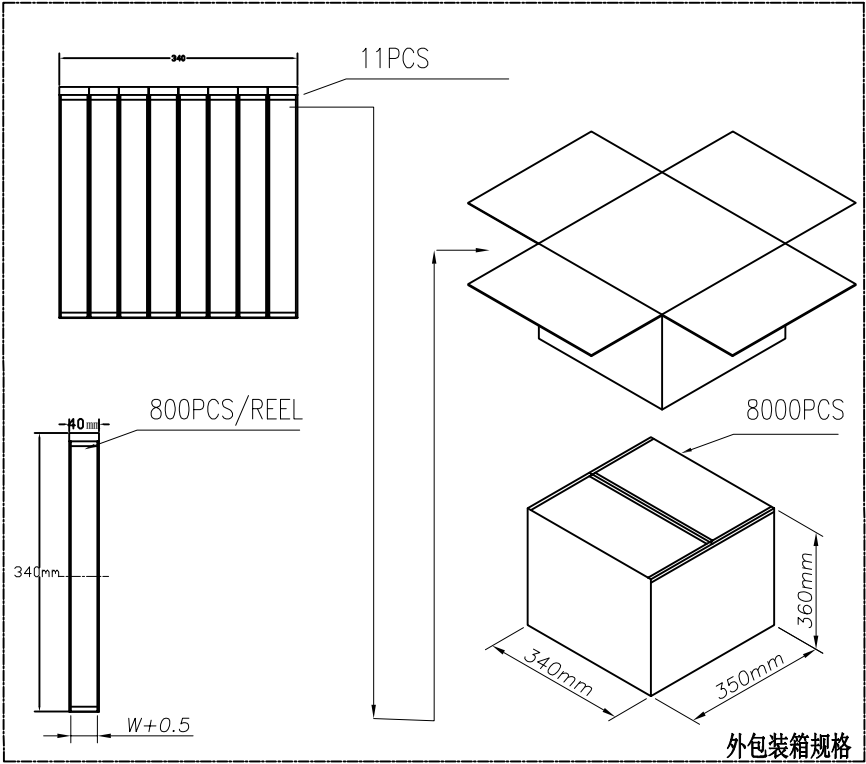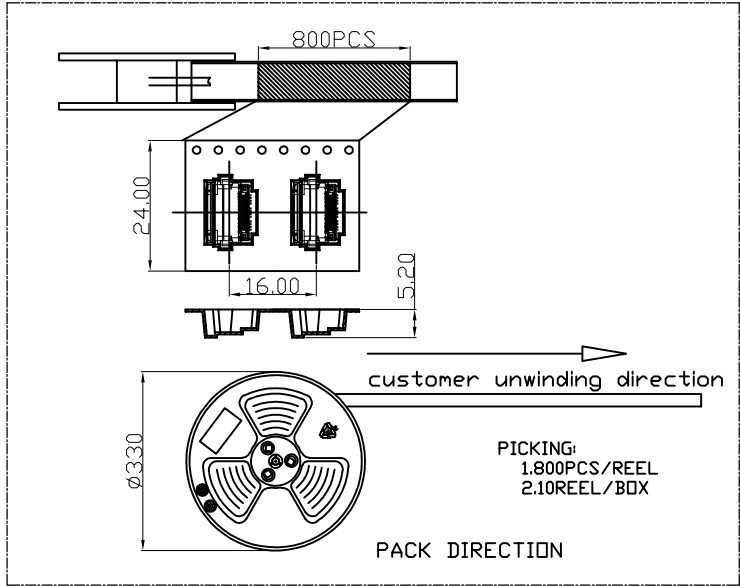

	REEL	CARTON
CONNECTOR (PCS)	800	8800

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

Frame_A3
Rev.F2013/09/10

GENERAL TOLERANCES		UNIT	mm				
DISTANCE	X.	±0.25		MATERIAL		SEE NOTES	
	.X	±0.20		FINISHED		SEE NOTES	
	.XX	±0.15		APPROVED		KATE DENG	
	.XXX	±0.10		CHECKED		KATE DENG	
ANGLE	X.	±3.0°		DESIGN		FAND	
	.X	±2.0°		DRAWN		Wang Yan	
	.XX	±1.0°					
				TITLE:		TYPE C/F 24PIN 防水IP68沉板双贴斜口CH0.4	
				PART NO.		JK-US3724AGB0043R	
				DRAWING NO.			
SCALE		1:1		SIZE		A3	
SHEET		1 OF 1		REV.		A	



杰康富精密电子有限公司
J K F precision Electronics Co., LTD