
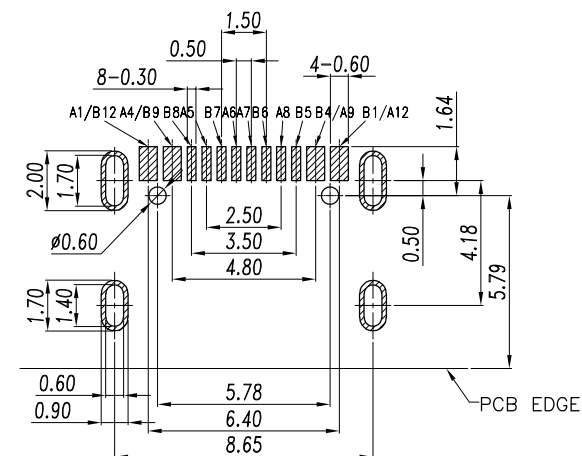
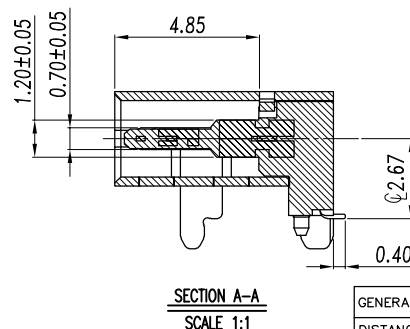
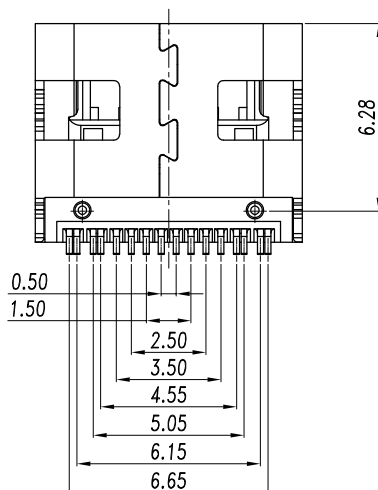

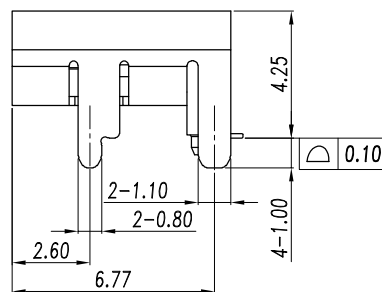
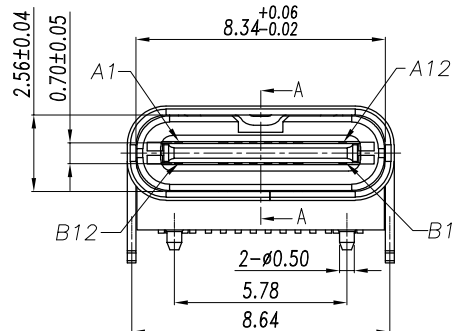
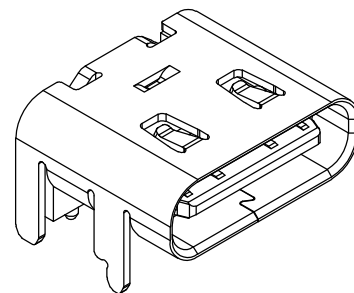
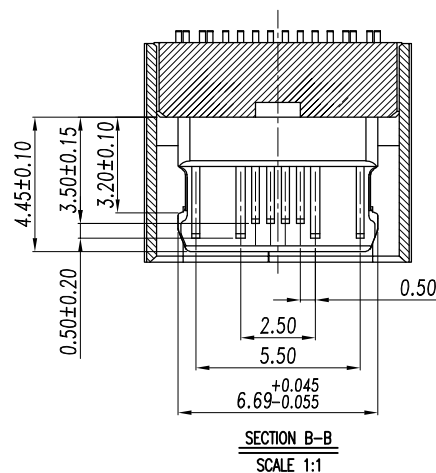


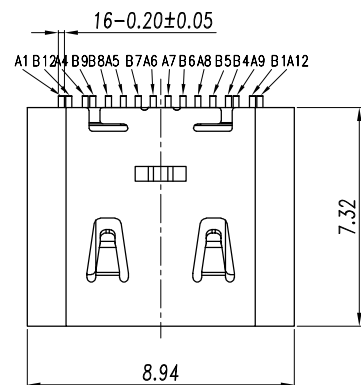

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

备注:

1. 材料要求:

1-1. 胶芯主体主: 高温料 UL94 V-0.

1-2. 端子: 铜合金

1-3. 中夹片: 不锈钢

1-4. 外壳: 不锈钢

2. 电镀规格:

2-1. 端子

接触区镀: AU G/F 焊脚区镀雾锡 80~120u"

2-2. 外壳电镀: 全区镀NI 30u" MIN

3. 机械性能:

3-1. 插入力: 0.5~2.0kgf.

3-2. 拔出力: 0.8kgf~2.0kgf.

3-3. 耐插拔次数: 10000 CYCLES.

4. 电气性能:

4-1. 额定电流: 3A 5A

额定电压: 20V

4-2. 绝缘电阻: 100MΩ MIN

4-3. 耐电压: AC 100V FOR 1 MINUTE.

4-4. 低接触电阻: 插拔前 40mΩ

插拔后 50mΩ

5. 环境性能:


操作温度: -30℃~+80℃.

6. IR 温度:

产品过IR回焊炉时最度温度260℃. 持续 10s

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.			MATERIAL	SEE NOTES
	.X	±0.25		FINISHED	SEE NOTES
	.XX	±0.15		APPROVED	KATE DENG
	.XXX	±0.10		CHECKED	KATE DENG
ANGLE	X.	±3.0°		DESIGN	FAND
	.X	±2.0°		DRAWN	Wang Yan
	.XX	±1.0°			

杰康富精密电子有限公司 <i>J K F precision Electronics Co. LTD</i>		TITLE:		TYPE-C 母 16P 板上 垫高 1.0	
		PART NO.		JK-US4216AGB00212R	
		DRAWING NO.			
SCALE	1:1	SIZE	A4	SHEET	1 OF 2
REV.	A				

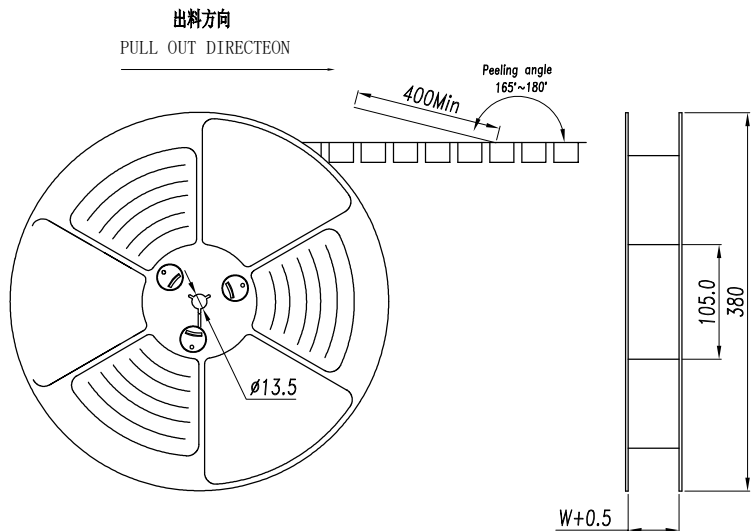


NOTES

1.帶子引導長度

LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

出料方向
PULL OUT DIRECTEON

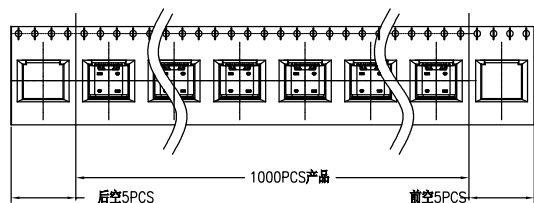

2.上帶 剝離力為: 0.1~1.3N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)

出貨'運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

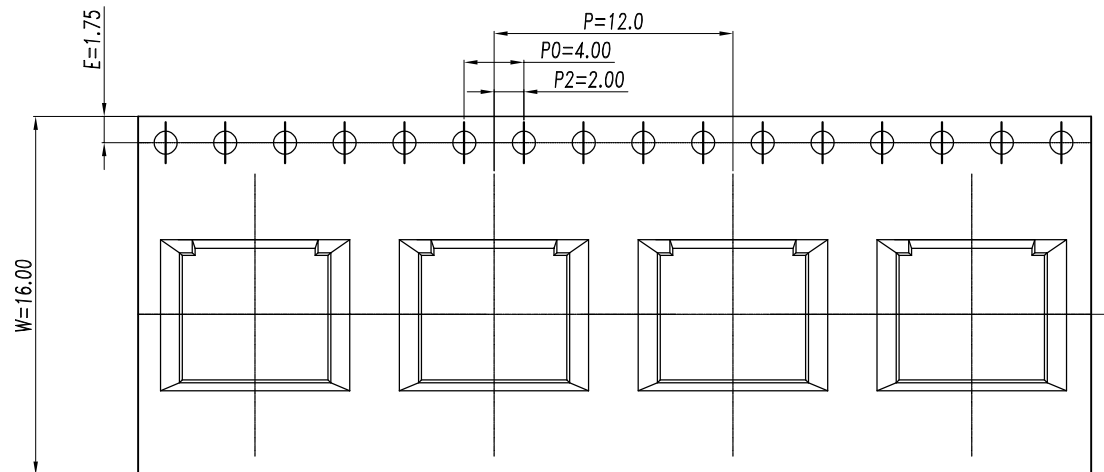

TAPE & REEL 10 PCS

1 REEL
= 1000 PCS

BOX

DIMENSIONS:
39.5X39.5X20

LABEL

1 CARTON
=10REELS
=10000 PCS

包裝明細表 (The detail of the packing) Carton

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
JK-US4216AGB00212R	1000	6	6000	----	----	----

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED
------	---------	-------------	-----------	---------	----------

Frame_A4
Rev.A2013/09/10

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	±0.25		SEE NOTES	
	.X	±0.20		SEE NOTES	
	.XX	±0.15		APPROCD	
	.XXX	±0.10		CHECKED	
ANGLE	X.	±3.0°		DESIGN	
	.X	±2.0°		DRAWN	
	.XX	±1.0°		SCALE	
				SIZE	
				A4	SHEET
				2 OF 2	REV.
				A	



杰康富精密电子有限公司
J K F precision Electronics Co. LTD

TITLE:

TYPE-C 母 16P 板上 垫高 1.0

PART NO.

JK-US4216AGB00212R

DRAWING NO.

SCALE

1:1

SIZE

A4

SHEET

2 OF 2

REV.

A